

# This catalogue interacts with the HepcoMotion website









Additional information is available where you see this icon



From HepcoMotion home page





On this web page are the datasheets referred to in this catalogue, plus information on new additions to the PRT2 range and downloads for the catalogue and catalogue amendments.

# Introducing the HepcoMotion® **PRT2** Precision Ring and Track System

HepcoMotion has been solving Customers' circular motion problems for many years, building an indispensable knowledge of applications and clever technical solutions. This knowledge coupled with extensive research and development has resulted in the introduction of a comprehensive range of precision ring slides and track systems to suit virtually every need. Based on the highly successful PRT product the new PRT2 system offers a greatly expanded range of sizes and options including stainless steel availability as standard. The Precision Ring Slide and Track System products compliment Hepco's highly successful and extensive range of linear motion products, enabling customers to choose a single source for all their motion guidance requirements.

#### Features & Benefits

#### Common

- Friction-free motion.
- Stainless steel options.
- Fully adjustable.
- Tolerant of debris.
- Simple and effective means of lubrication.
- Zero play.
- Works in any plane.
- Tolerant of misalignment.
- Easy to install.
- 2D & 3D CAD files available.

#### Ring Slides and Segments

- Circular motion control at the periphery where it is needed.
- Large hollow centre to accommodate other components (ring slides).
- Precision flat surface for mounting ancillary components (ring discs).
- Will track the curvature of cylindrical
- Gearcut options for ease of driving.
- Double edge and single edge versions available.
- Carriage brake available.

#### Track Systems

- Limitless variety of circuits available.
- Precision positioning system available.
- High load support option at work stations.
- Simple alignment facility provided.
- Various carriage plate
- Components available for driving.
- Support frame available.

#### For amendments and updates visit www.HepcoMotion.com and select literature button


# **Contents System Composition** 2-7 **Application Examples** 8-19 **Full Size Illustrations for Initial Selection** 20-21 22-25 **Assembled Ring System Double Edge Ring Slides and Segments** 26-27 **Single Edge Ring Slides and Segments** 28-31 Rings Discs 32-33 34-36 **Bearings** Lubricators **37 Fixed Centre Carriages** 38-39 40-41 **Track Systems Track System Straight Slides** 42-46 and Curved Segments **Bogie Carriages** 47 **Moment Load Carriages** 48-49 **Driven Track System Components** 50-51 **Bleed Lubrication 52 53 Pinions Technical Section** 54-58 **Technical Specifications 59 Rolled Rings, Segments & Specials** 60 **Related Products** 61

### **System Composition**


The HepcoMotion PRT2 system comprises of a comprehensive range of ring slides, ring segments, bearings and ancillary components which provide a versatile solution for most rotary and track system applications. A large range of ring slide types in various diameters are available in both steel and stainless steel with hardened V edges. Stock  $90^{\circ}$  and  $180^{\circ}$  segments are also available. Gear cut versions are available with pinions to provide a simple and effective means of driving. An overview of the comprehensive product range is shown  $\square 2$  - 7.

# Double Edge V Ring Slide 26-27

- Bearings can be mounted internally and externally.
- Carriages can be run on double edge rings.
- Precision ground all over for high accuracy and conformity.
- Large hollow centre to accommodate other components.
- Datum register faces provided internally and externally for ease of location.
- Internal/External gear cut options available for ease of driving.
- V edges hardened for maximum wear resistance.
- Soft centre section allows customising.
- Stainless steel option available as standard.
- Through hole fixing or tapped hole fixing.
- Comprehensive range of drive pinions available 🕮 53.

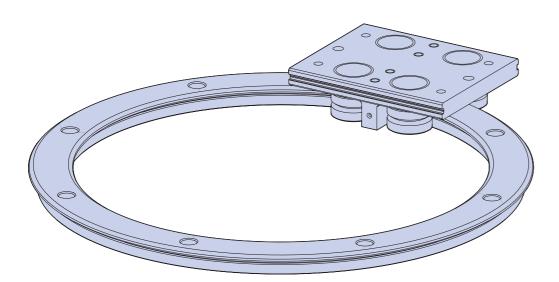


# V Ring Segments 26-31

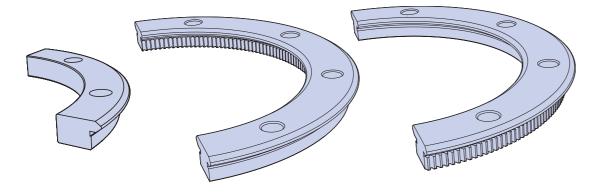

- 90° and 180° segments available as standard.
- Double edge V and single edge V ring segments available as standard.
- Special length segments available to order.


#### **System Composition**

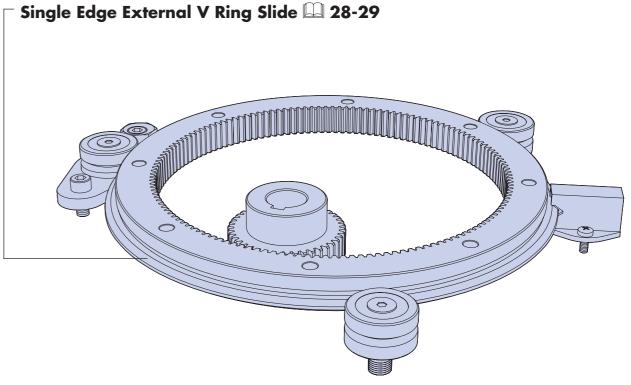

#### **Common features**

- Narrow section width.
- Datum register face for ease of location.
- Large gear size and face width.
- Stainless steel option available as standard.
- V face hardened for maximum wear resistance.
- Soft centre section allows customising.
- Manufactured from high quality steel.Choice of external or internal V.


- Precision ground all over for high accuracy and conformity.
- Through hole fixing or tapped hole fixing.
- Can be used in any orientation.
- Comprehensive range of sizes.
- Comprehensive range of drive pinions available 🕮 53.

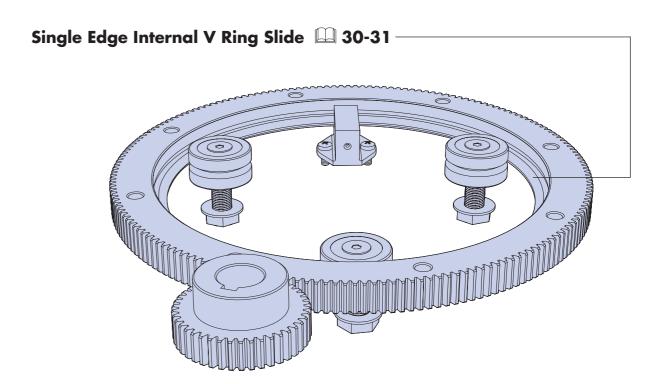

#### **System Composition**

HepcoMotion bearings are available in a range of 5 useful sizes and various formats to suit most design requirements. The special raceway conformity and low radial clearance make these bearings particularly suited to ring slide applications. All bearings are lubricated for life internally and are available with metal shields for exclusion of particulates and low friction running or, with nitrile seals to inhibit ingress of liquids. Bearings are also available in stainless steel fitted with nitrile seals.

- Through hole fixing bearing (concentric) 12 34-35
- \* Through Hole fixing bearing (eccentric) 🕮 34-35
- Provides datum reference for the system.
- Short fixing stud for thin carriage plate.
- Long fixing stud for thick carriage plate.
- \* Controlled height option for enhanced system height accuracy.
- \* Provides simple means of adjusting via centre hexagon or socket in stud.
- \* Eccentric adjustment sufficient to allow removal of the ring or carriage without disassembly.





#### Blind hole fixing bearing (concentric) 1 34-35

- For mounting into thick plates or where access to opposite side is restricted.
- Provides datum reference for the system.
- Controlled height option for enhanced system height accuracy.




- For mounting into thick plates or where access to opposite side is restricted.
- Adjustable from operating side for ease of access.
- Controlled height option for enhanced system height accuracy.
- Easily removed to allow removal of ring.






#### Floating bearing (concentric & eccentric) 4 36

- Axial float of outer race accommodates variation in system height.
- Provides simple means of adjusting via centre hexagon or socket in stud.
- Short fixing stud for thin carriage plate.
- Long fixing stud for thick carriage plate.
- Double eccentric version has sufficient adjustment to allow removal of the ring or carriage without disassembly.



#### \* Double Row Bearing / Twin Bearing □ 34-35 •

- Twin bearing for tolerance of misalignment and smooth running.
- Double row bearing for tolerance of debris and higher load capacity.
- \* Special raceway conformity and low radial clearance, for slide ring applications.
- \* General quality to ISO Class 4. Aspects to Class 2.




#### **System Composition**

HepcoMotion track systems combine ring segments with straight slides to achieve an almost limitless variation of open paths or closed circuits. Both left and right hand bends can be negotiated depending on the carriage selected. 90° and 180° segments in all standard double edge ring sizes are available in addition to straight slides up to 4 metres long. Straight slides can be butted together to achieve track systems of unlimited length.

#### Driven track system components @ 50-51


- Comprehensive range of drive components available from complete proven system.
- Trip latch overload protection.
- Carriage positioning and locking system.
- Toothed belt with carriage connection facility.
- Corner support plates.
- Drive and idler pulleys with Hi-load bearing cartridaes.
- Support frame with slide attachment facility.

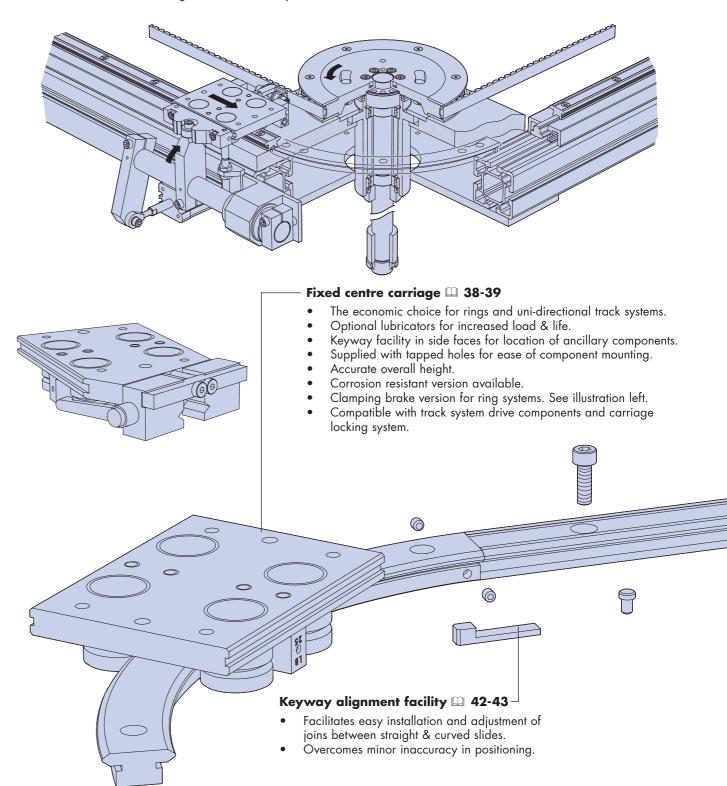

### **System Composition**

#### • Track system straight slides 🕮 42-43 / Track system curved segments 🕮 44 \*

- \* Hardened V faces for maximum wear resistance.
- \* Soft centre allows customising.
- \* Precision ground on ends and all important faces.
- \* Stainless steel option.
- \* All segments and slides precision matched.
- \* Ground datum faces for location purposes.
- \* Option available to suit pre-drilled mounting holes.
- 90° and 180° segments available from stock.
- Any length segment available to order.
- Central keyway for location and alignment.
- Up to 4m in one piece, unlimited length achieved by

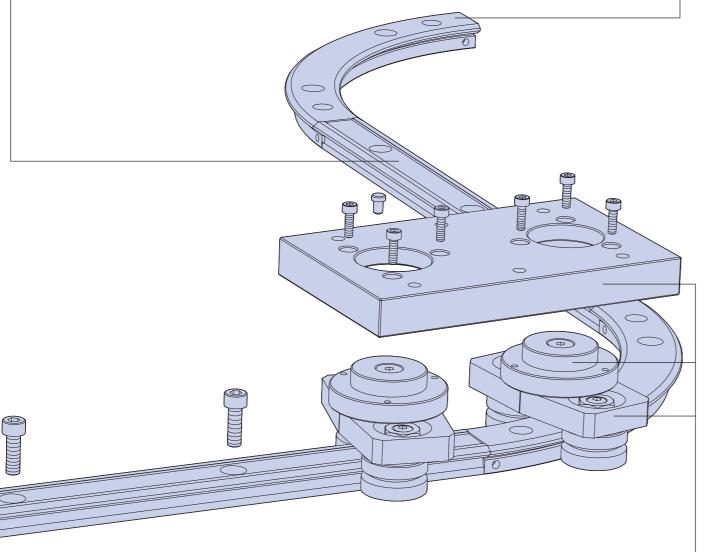


# Dowel pins 42-43

 Locates in central keyway of straight slide for ease of location and alignment.

#### Bogie carriage 🕮 47

- Negotiates 'S' bends and differing bend radii.
- High performance swivel bearing for precision movement and
- Swivel bearings are lubricated for life internally.
- Available in three sizes to suit 25, 44 & 76 track systems.
- Supplied with tapped holes for ease of component mounting.
- Accurate overall height.
- Large platform for mounting purposes.

#### **System Composition**




#### Ring Disc 🕮 32-33

- Ideally suited to turntable applications.
- Large precision mounting surface easily customised to suit customer's components.
- Precision ground all over for high accuracy and conformity.
- Gear cut option for ease of driving.
- Useful range of sizes available.
- Choice of fixing, counterbored holes or tapped hole
- V edge hardened for maximum wear resistance.
- Stainless steel option available.


#### Moment load carriage 48-49


- Supports overhanging loads and increases direct load capacity at workstations.
- Compatible with HepcoMotion carriage locking system and support frame.
- Compatible with HepcoMotion belt drive connection facility.
- Many support options possible using standard components.
- Static and dynamic support possibilities.




#### Lubricators 🕮 37

- Provides lubrication to the contact faces thereby increasing load capacity and life.
- Long lubrication interval.
- Lightly sprung felt wiper for low friction.
  Compact type suitable for through hole fixing, flanged type for through and blind hole fixing.





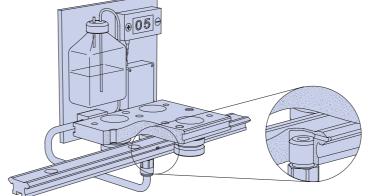



#### Bleed lubrication 🕮 52

- Suitable for use with track systems.
- Lubrication piped through holes, direct into the V contact faces.
- Controlled metering of lubrication.
- Overcomes necessity for lubrication service intervals

#### Pinions 🛄 53


- Sizes to suit all gear cut ring slides, segments and ring discs.
- Ground teeth for long life and smooth operation on sizes 1 module and above.
- Hardened teeth on larger sizes for increased durability.
- All pinions available in stainless steel as option.
- Precision machined bore, and optional keyway on sizes 1 module and above.



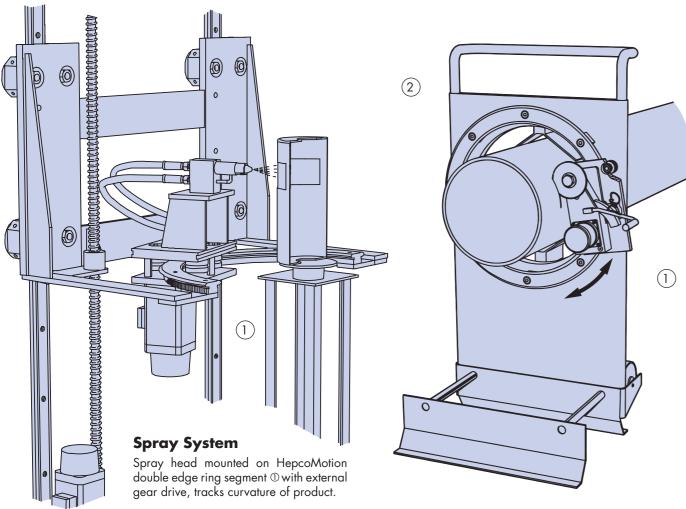

# **Mobile Saw for Long Tubes**


Motor and saw assembly mounted on carriage ① is hand operated around 360° HepcoMotion double edge ring slide ② in order to cut tube.

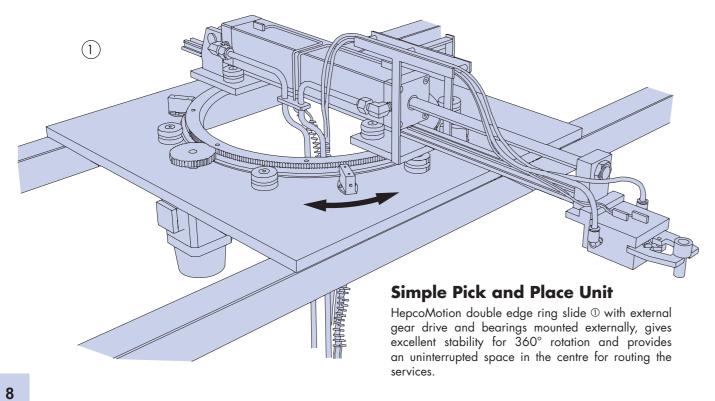


# **Application Examples**

### **Three Axis Assembly Robot**


HepcoMotion ring disc with gear drive ① provides an ideal platform on which to mount the robot. The large diameter disc with HepcoMotion bearings gives support at the periphery, ensuring excellent stability and friction free motion.

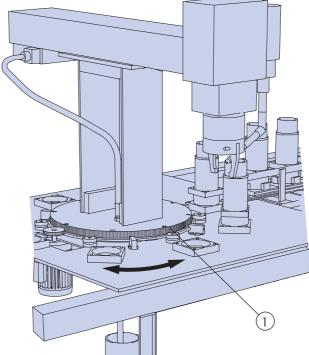





# **Rotary Assembly fixture**

HepcoMotion ring disc ① provides a large mounting area for attaching components. The precision ground surface ensures accuracy and the unhardened area inboard of the V's enables tooling holes to be drilled as required.

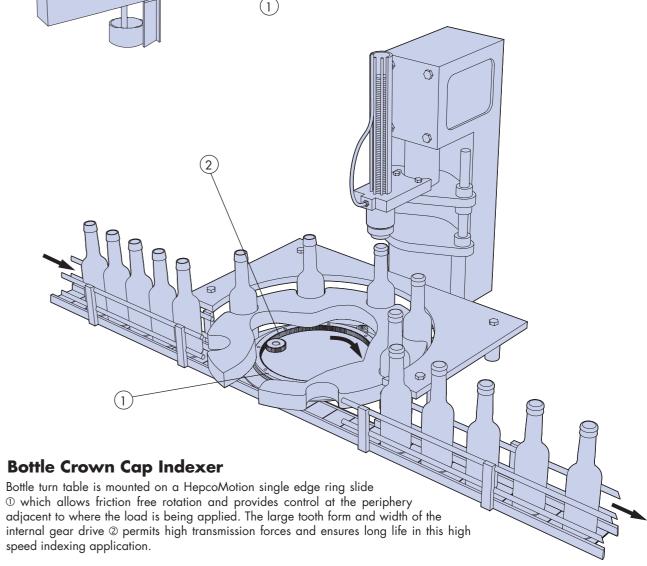


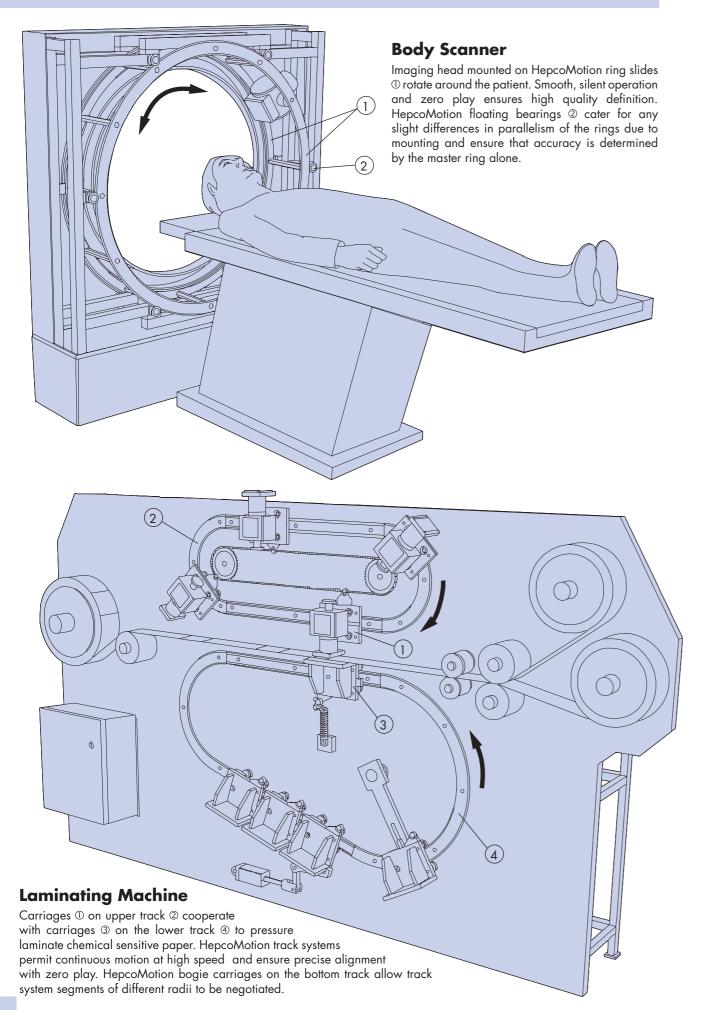



# **Application Examples**

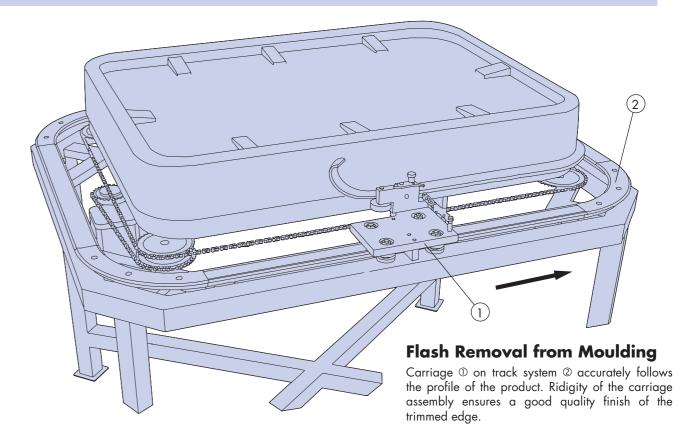

# **Multi-Station Assembly Machine**

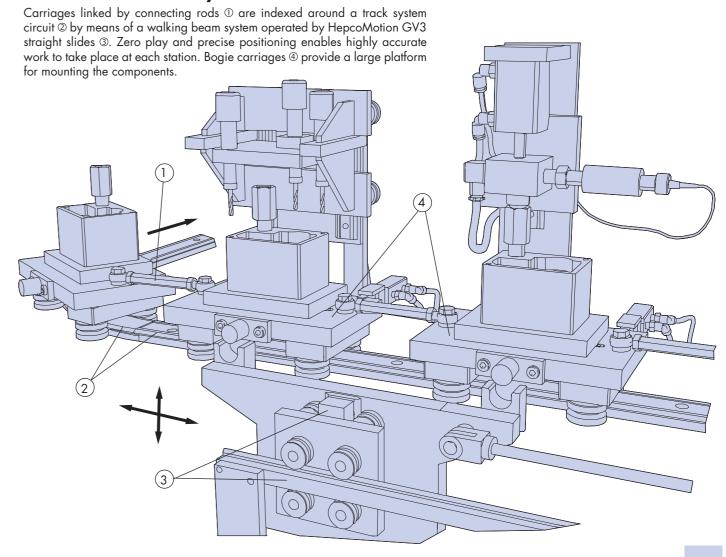

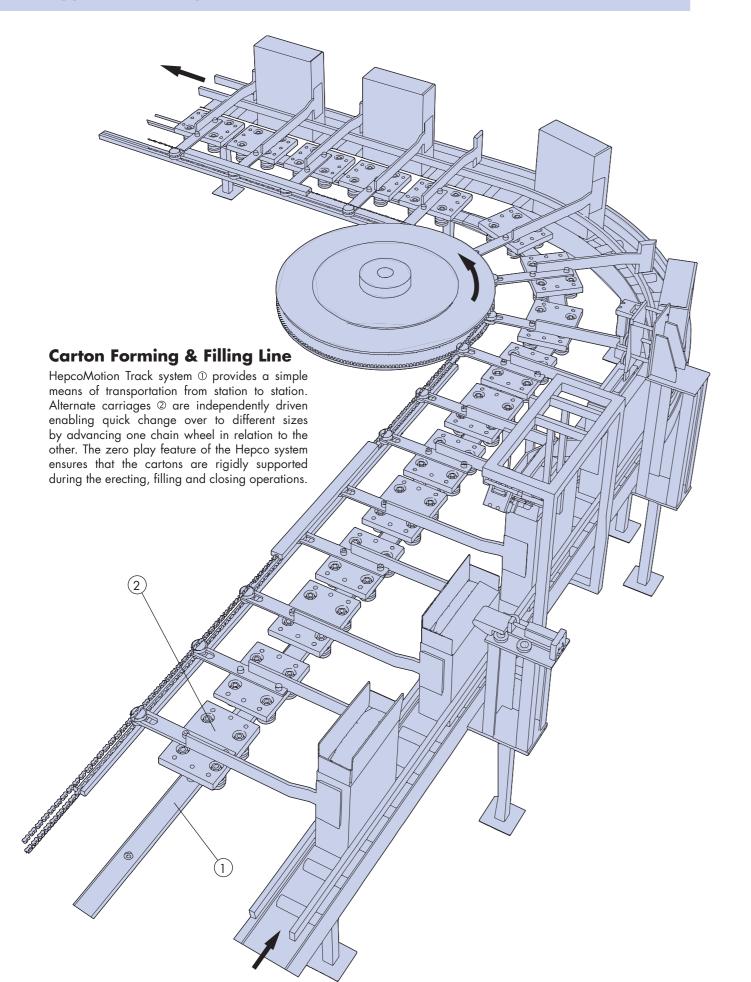


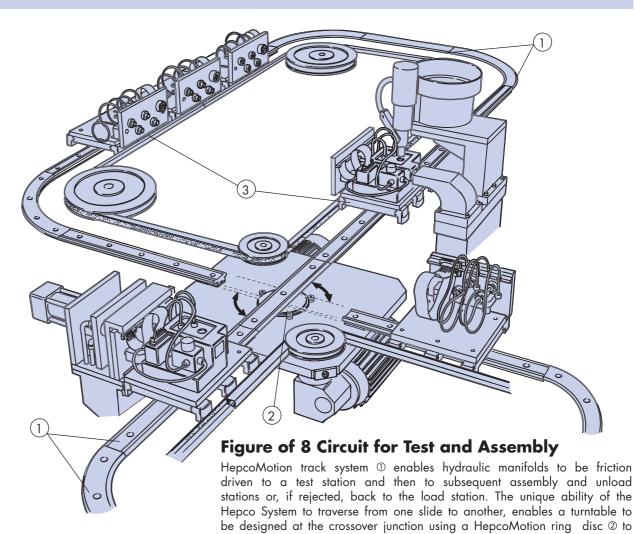

# **Optical Lens Assembly**

Machine incorporates a standard HepcoMotion DTS complete driven track system for which there is a separate catalogue. See also 450 & 51.

Lenses are loaded by pick and place units onto clamp fixtures mounted on HepcoMotion carriages ①. Optical adhesive is applied between lenses before passing through ultra-violet light box to activate hardener. Precise positioning of carriages is required at work stations, this is achieved by means of the HepcoMotion carriage locking system ②.

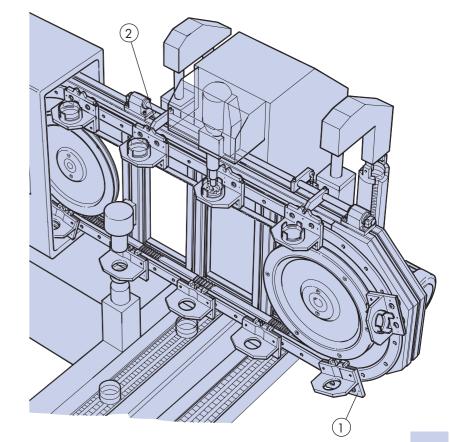

provide rotary movement. Bogie carriages 3 allow S bends to be traversed.


# **Clamping Method for Belt to Carriage** Connection Carriages are connected to the belt by means of clamping device ①, resulting in a strong fixing which overcomes the need to screw through the belt. The pulleys must be machined to provide recesses @ in order to accommodate the clamps. The slip block method 19 should be used to adjust track system length in relation to the tensioned belt.


Track Systems

Mounted in Parallel

Two track systems may be mounted in parallel in order to support long components. This application incorporates heavy duty toothed belts with teeth removed at the carriage connection positions and replaced by steel inserts ①. This enables the drive link brackets 2 to be bolted through to the steel inserts thereby achieving a strong fixing. Link arms 3 connect the carriages to the belts to provide a one way drive. This allows the pulleys to be adjusted in relation to the tracks for belt tensioning purposes. To overcome the necessity for accurate spacing apart of the tracks, HepcoMotion floating type bearings @ are used on one side to accommodate any axial wander.

#### **Application Examples**

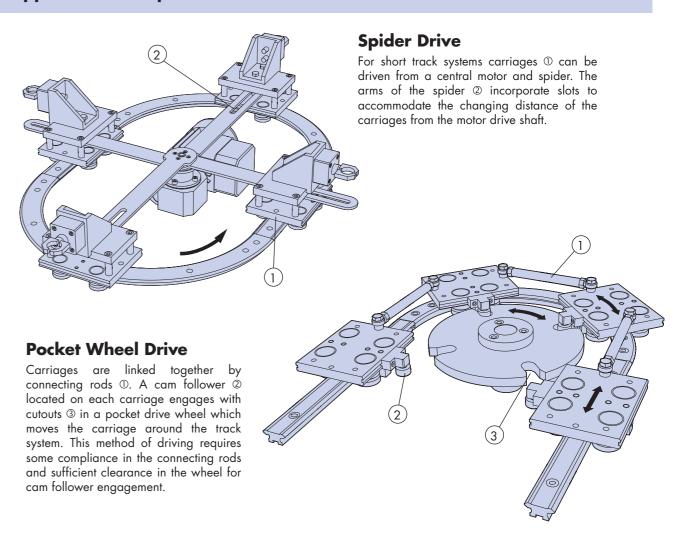

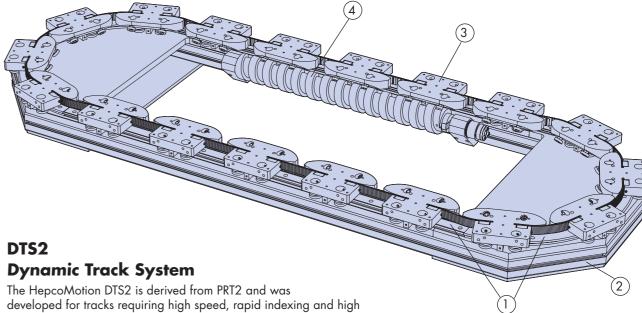


developed for tracks requiring high speed, rapid indexing and high driving forces. It includes a PRT2 track ①, mounted on a Hepco MCS compatible frame ②. Its carriages ③, are linked with adjustable spring-loaded belts and driven by a screw ④. The DTS2 can be supplied with motors, drives and bleed lubrication system ( 4 52). DTS2 units can be oval as illustrated, rectangular, or have any other valid track layout without S-bends. A range of sizes is available, in either standard or corrosion resistant version.

A datasheet for DTS2 is included at www.HepcoMotion.com/dts2datauk.


# **Slotted Carriage Connection For Belt** Adjustment

The timing belt is fitted with U section attachments ① secured to the belt with countersunk screws. Pins 2 engage with slotted drive member 3 which drives the carriage around the circuit. In this type of design whether using a belt or chain, it is important to provide a slot to allow for tension adjustment and also to cater for slight variation in the proximity of carriage to belt or chain, as the carriage traverses from straight to curve.

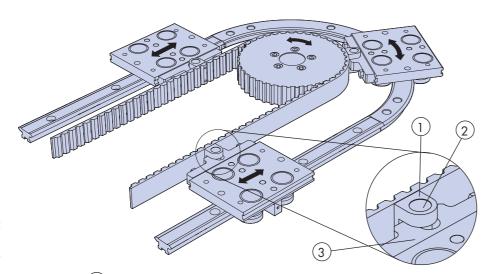

#### **Link Drive**


A simple link arm 1 pivoting on an extended pin, connects to the carriage and provides for a drive in a single direction only. The design allows an amount of chain adjustment to take place and caters for slight variation in the proximity of carriage to chain, as the carriage traverses from straight to curve. It is recommended that chain support rails 2 are fitted to overcome the offset drive forces.

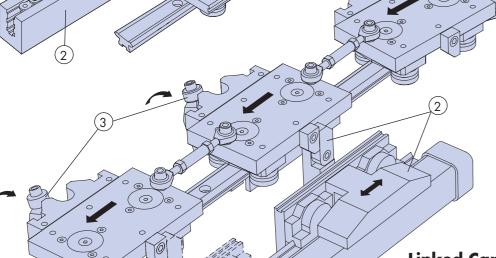

#### **Linked Carriage System** With Latch & Pawl Drive


Bogie carriages ① linked by adjustable connecting rods, are indexed by means of HepcoMotion Powerslide and latch mechanism 2. Hepco carriage locking system 3 ensures location and positional accuracy during the stationary cycle. Linked carriage systems require some play to be present in the link journals or to have other means of compliance. Please visit www.HepcoMotion.com/PRT2datauk and select datasheet No. 1 Design criteria for Track System Drives.

# **Linked Carriage System With Scroll Drive**

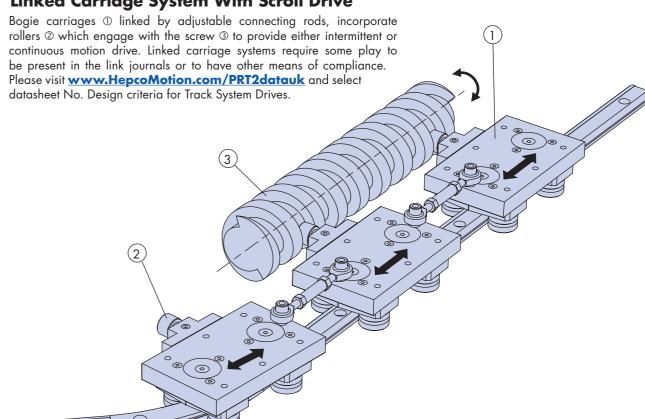


# **Duplex Track System With Centre Chain Drive**


This durable and highly stable duplex track system capable of withstanding high loads, is available complete with special chain and scroll drive system from Hepco. The track system comprises of duplex single edge slides ① and a central drive to ensure constant velocity around the circuit. Any number of carriages at virtually any spacing can be accommodated on the system which can be supplied complete with motor and mounted on a Hepco MCS frame. Chain adjustment is rarely required but is achieved by the slip block method 2 as shown and further illustrated 🛄 19. Either intermittent or constant motion is possible in either direction. A unique mechanism within the carriage in conjunction with the carriage locking system 3 🕮 50-51, enables index positioning to within 0.02mm to be achieved.

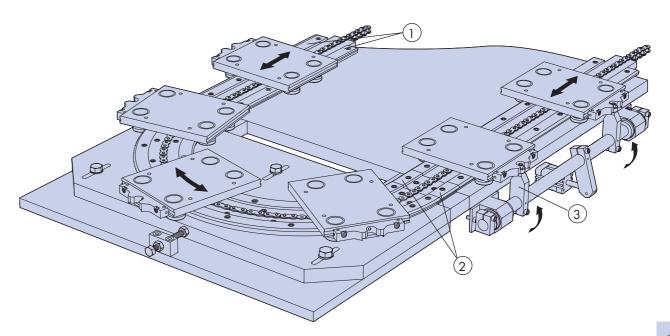

### Gear Driven Duplex Track System


Single edge track system with a gear drive on the inner curved and straight slides ①, engages with pinion ② driven from the motor. A sprung pivot arm ③ ensures that the pinion remains engaged with the rack as it travels from straight to curve. The system is a standard HepcoMotion design and can be supplied either in part or, as a complete system with motor as required.

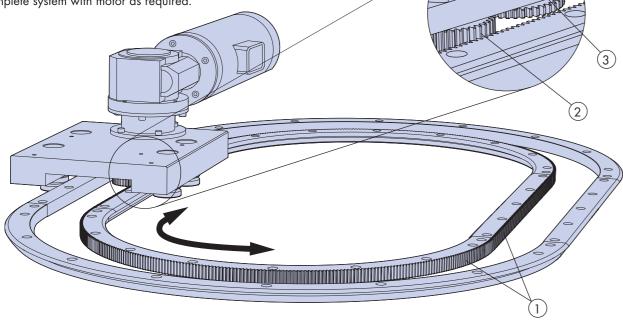

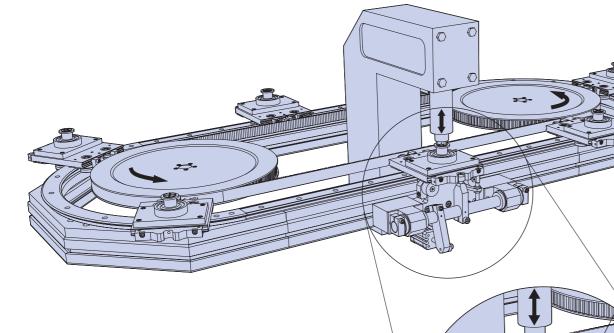

# Track System With Moment Load Carriage

# **Application Examples**




### **Chain Tensioning for Long Track Systems**

A track system driven by a chain or belt ideally requires a means of adjustment for pretensioning and to allow for subsequent wear and stretch, particularly in the case of a chain drive. Limited adjustment can be achieved by providing a slot at the chain to carriage connection point (see top illustration 16) or by link connection of chain to carriage (see centre illustration 16 and example below). However, in systems where a large amount of adjustment is anticipated or where the path of the belt or chain must follow in exact relationship to the path of the track, the Slip Block or Bridging methods of adjustment should be considered.


### **Slip Block Adjustment Method**

Hepco can provide sets of short length straight slides in various increments of length, precisely matched to those on the track system and with square ground ends. Each slide will be marked according to its length. Slide support blocks can also be supplied to customer's drawing if required. Please visit <a href="www.HepcoMotion.com/PRT2datauk">www.HepcoMotion.com/PRT2datauk</a> and select datasheet No.10 Slip Block adjustment method.

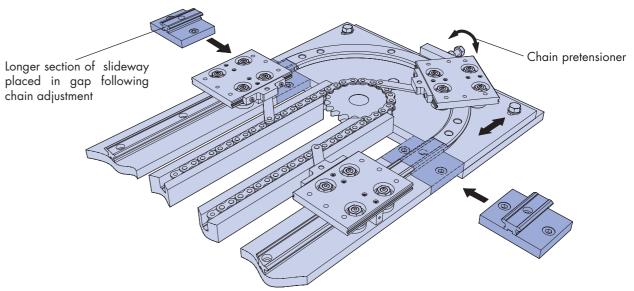

# **Bridging Slide Adjustment Method**

The bridging slide arrangement enables the track to be extended following adjustment of the chain drive whilst maintaining continuity of guidance and control. In order to traverse the adjustment gap, the bearings have external chamfers on the outside diameter in addition to the normal central V. The bridging slide arrangement comprises of three fixed slideways and one adjustable slideway, see illustrations below. All components comprising the bridging slide arrangement and special bearings can be readily supplied. Please advise total amount of slide adjustment required.

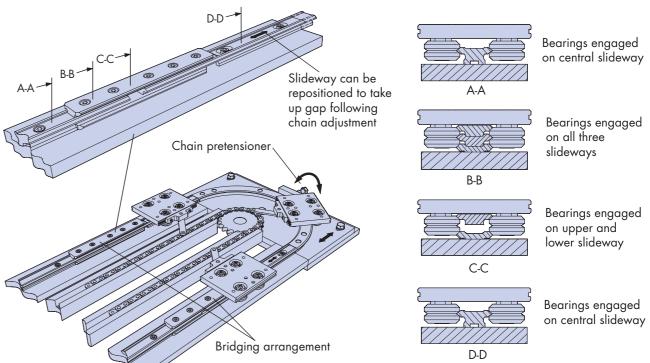


# **Full Size Illustrations For Initial Selection**


Full size illustrations of the basic range of Ring slide systems together with a comparison table for bearings and lubrication are provided to help with initial selection. Customers should refer to the individual component pages for dimensions and to the Technical section for details of load and life. There is a wide range of other options and components complementary to those shown in this section. These are illustrated in the System Composition 2-7 and throughout the catalogue.

		Lo	ad					Tolera	nce of			Toleranc	e of		
Bearing	H((())	<b>—</b>			Speed	Smo	othness	Misalig		Ridgi	ty	Debri		P	rice
	<u></u>	$\odot$	☺	$\odot$			$\odot$	<u></u>	$\odot$	<u></u>	$\odot$	⊕	$\odot$	0	<u></u>
Twin Bearing															
Double Row Bearing															
Dedring															
Floating															
Bearing															

Lubrication	L	.oad	Lubricatio	on interval		Friction		Life			Price	
Method	<u> </u>	<b>©</b>	<b>:</b>	©	$\odot$	<b>:</b>	<u> </u>		$\odot$	$\odot$		<u>:</u>
None												
Hepco Lubricator												
Hepco Bleed Lubrication			Automo frequency	ntic lube v possible								

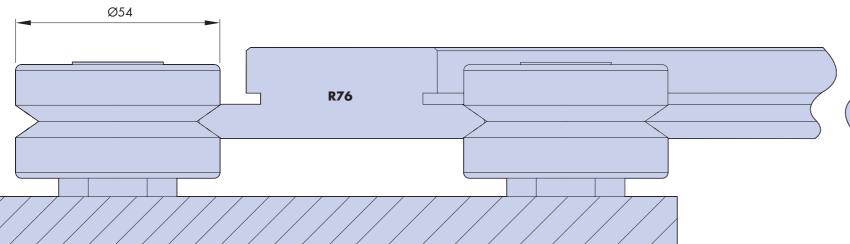



# **Full Size Illustrations For Initial Selection**

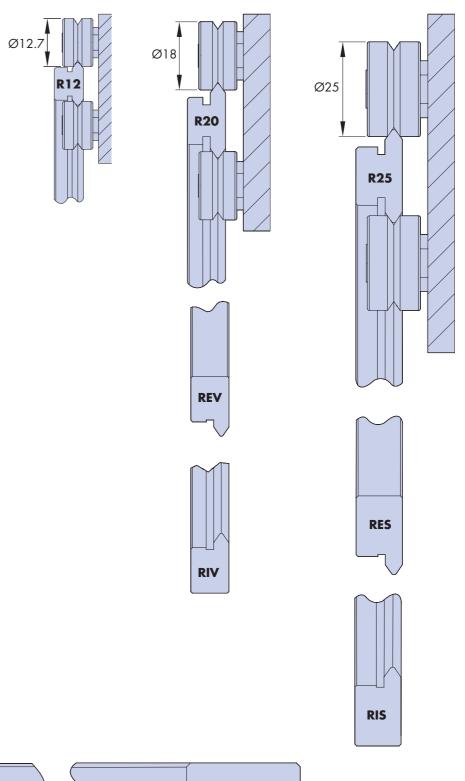

REL

RIL

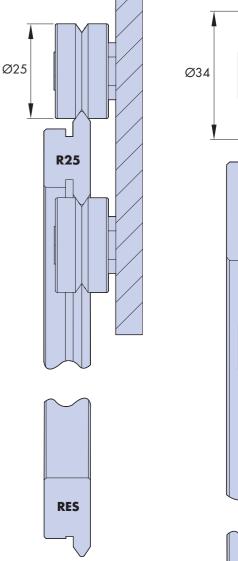




REM

RIM






#### **Assembled Double Edge Ring System**

The HepcoMotion double edge ring system with carriage may be used in either complete ring form or with segments. It can also be combined with straight slides to form a track system 40-44.

Rings may also be encircled by bearings either externally and/or internally with either ring or bearings being the moving element (see page opposite). The HepcoMotion PRT2 eccentric bearings are of double eccentric design with sufficient throw to enable disengagement of the carriage or encircled ring, without further disassembly.

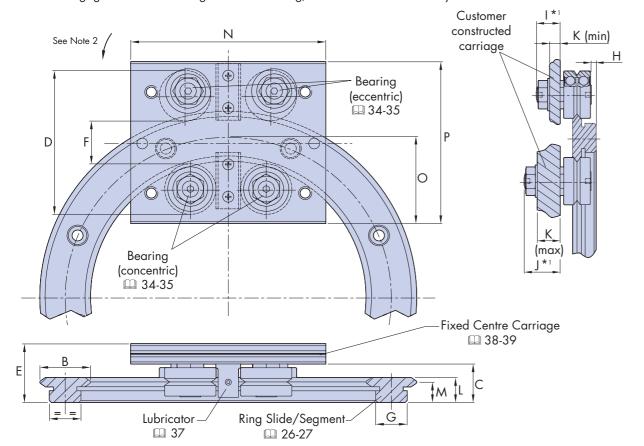


# **Assembled Double Edge Ring System**



When using HepcoMotion Double Edge Ring Slides encircled by bearings as shown below it is recommended that two concentric bearings should be placed 120° apart in order to provide a datum reference. The other bearings should be the eccentric type. All eccentrics may be used where positional adjustment of the ring is required.

One or more lubricators may be fitted at convenient positions to take advantage of the increased load/life afforded by lubrication \$\mu\$ 55-57.

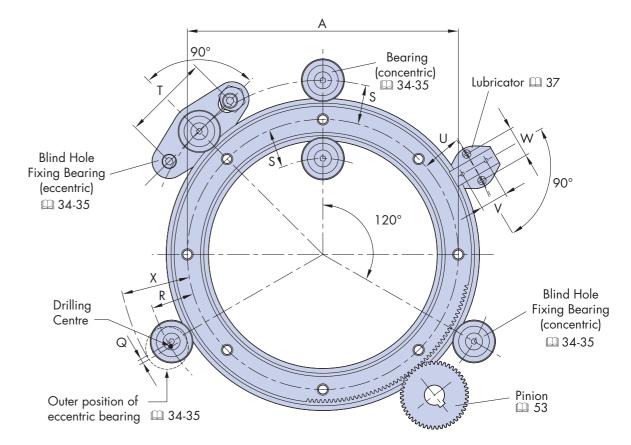

Ring slides 26-27











						I								ı														ام [
Ring	For use with bearing (Ø)												K									Drilli	ng Positi	ions <sup>*3</sup>				Tanana Pa
Slide Ref No		A	B ~	С	D	E	F	G	н	I,1	J*1	Max	Min		L	M	N	0	Р	Q	R	S	<b>T</b> ±0.2	<b>U</b> ±0.2	<b>V</b> ±0.2	<b>W</b> ±0.2	X	) Y
R12 93	J13	93	12	11.67	34.7	19.0	9.1	8.6	1.5	5.8	9.5	6.7	2.2		7.7	6.2	55	22	40	1.3	12.3	10.9	30	11.5	6.5	12	20.5	
R12 127	J13	127	12	11.67	34.7	19.0	9.1	8.6	1.5	5.8	9.5	6.7	2.2		7.7	6.2	55	21	40	1.3	12.3	10.9	30	11.5	6.5	12	20.5	
R20 143	J18	143	20	14.75	52.5	24.75	16.3	12.4	2.4	7.4	14	10	2.4		10	8	75	34	64	1.8	19	17.2	38	18	13	13	30.6	X
R20 210	J18	210	20	14.75	52.5	24.75	16.3	12.4	2.4	7.4	14	10	2.4		10	8	80	34	64	1.8	19	17.2	38	18	13	13	30.6	AB
R25 159	J25	159	25	19	71.2	30.5	20.9	15.4	2.4	9.8	19	13	2.2		12.25	10	95	43	80	1.9	24.9	23.0	50	22.5	16	18	40.2	
R25 255	J25	255	25	19	71.2	30.5	20.9	15.4	2.4	9.8	19	13	2.2		12.25	10	100	42	80	1.9	24.9	23.0	50	22.5	16	18	40.2	С
R25 351	J25	351	25	19	71.2	30.5	20.9	15.4	2.4	9.8	19	13	2.2		12.25	10	105	42	80	1.9	24.9	23.0	50	22.5	16	18	40.2	
R44 468	J34	468	44	24	106.0	38.5	37.8	26	2.7	13.8	22	14.8	5.2		15.5	12.5	145	61	116	2.5	38.5	35.9	60	34.5	22	25	59.1	
R44 612	J34	612	44	24	106.0	38.5	37.8	26	2.7	13.8	22	14.8	5.2		15.5	12.5	150	61	116	2.5	38.5	35.9	60	34.5	22	25	59.1	
R76 799	J54	799	76	38.5	172.8	58.5	64.4	50.5	3.8	17.8	30	20.4	5.7		24	19.5	190	96	185	3.9	63.1	59.2	89.5	57	33	38	95.6	
R76 1033	J54	1033	76	38.5	172.8	58.5	64.4	50.5	3.8	17.8	30	20.4	5.7		24	19.5	210	96	185	3.9	63.1	59.2	89.5	57	33	38	95.6	
R76 1267	J54	1267	76	38.5	172.8	58.5	64.4	50.5	3.8	17.8	30	20.4	5.7		24	19.5	250	97	185	3.9	63.1	59.2	89.5	57	33	38	95.6	
R76 1501	J54	1501	76	38.5	172.8	58.5	64.4	50.5	3.8	17.8	30	20.4	5.7		24	19.5	270	97	185	3.9	63.1	59.2	89.5	57	33	38	95.6	


#### Notes

- 1. Two lengths of stud are available for each size of bearing 🚨 34-35. Choose according to required carriage thickness.
- 2. Offset holes in carriage for eccentric bearings necessitate adjustment in direction of arrow shown see 4 58.
- 3. Exact theoretical values have been given for 'Q', 'R' and 'S'. Positional accuracy of dimension 'S' will determine the axis of the ring. Positional accuracy for dimensions 'Q' and 'R' are not normally critical. Holes for bearing studs should be reamed to tolerance F6 for a sliding fit.

Ordering details:

Simply list the components required and if relevant, bracket those you wish to be factory

Example: Assembled




180° Ring segment 🕮 26-27

Fixed centre carriage 🕮 38-39

#### **Assembled Single Edge Ring System (External)**



When using HepcoMotion external single edge ring slides it is recommended that two concentric bearings should be placed 120° apart in order to provide a datum reference. The other bearings should be eccentric type. All eccentrics may be used where positional adjustment of the ring is required. Either ring or bearings can be the moving element. The HepcoMotion PRT2 eccentric bearings are of double eccentric design with sufficient throw to enable disengagment of the ring without disassembly. One or more lubricators may be fitted at convenient positions to take advantage of the increased load/life afforded by lubrication 4 54-57.

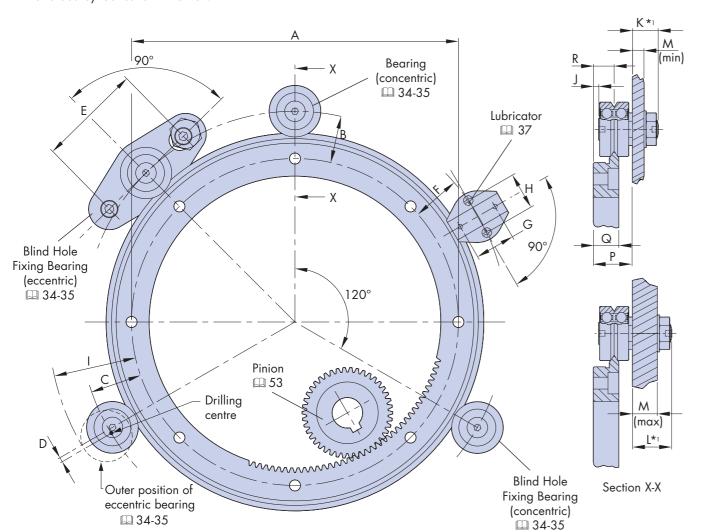

Ring Slide	For use with bearing (Ø)	_		D	Prilling	, Posit	ions <sup>*2</sup>							^	Λ	P	Q	R
Ref No		A	В	С	D	E	F	G	н	'	J	K*1	L,1	Max	Min			
REV 156	J18	137.6	16.7	18.5	1.8	38	17.5	13	13	30.1	2.4	7.4	14	10	2.4	14.75	10	8
REV 223	J18	204.8	16.7	18.5	1.8	38	17.5	13	13	30.1	2.4	7.4	14	10	2.4	14.75	10	8
RES 184	J25	159	23.0	24.9	1.9	50	22.5	16	18	40.2	2.4	9.8	19	13	2.2	19	12.25	10
RES 280	J25	255	23.0	24.9	1.9	50	22.5	16	18	40.2	2.4	9.8	19	13	2.2	19	12.25	10
RES 376	J25	351	23.0	24.9	1.9	50	22.5	16	18	40.2	2.4	9.8	19	13	2.2	19	12.25	10
REM 505	J34	468.5	32.4	35	2.5	60	31	22	25	55.6	2.7	13.8	22	14.8	5.2	24	15.5	12.5
REM 655	J34	618.5	32.4	35	2.5	60	31	22	25	55.6	2.7	13.8	22	14.8	5.2	24	15.5	12.5
REL 874	J54	820	48.3	52.1	3.9	89.5	45.5	33	38	84.6	3.8	17.8	30	20.4	5.7	38.5	24	19.5


#### Notes:


- 1. Short or long stud lengths are available for each size of bearing 🕮 34-35. Choose according to the required mounting
- 2. Exact theoretical values have been given for `B`, `C` and `D`. Positional accuracy of dimension `B` will determine the axis of the ring. Positional accuracy for dimensions 'C' and 'D' are not normally critical. Holes for bearing studs should be reamed to tolerance F6 for a sliding fit.


### **Assembled Single Edge Ring System (Internal)**



When using HepcoMotion internal single edge ring slides it is recommended that two concentric bearings should be placed 120° apart in order to provide a datum reference. The other bearings should be eccentric type. All eccentrics can be used where positional adjustment of the ring is required. Either ring or bearings may be the moving element. The HepcoMotion PRT2 eccentric bearings are of double eccentric design with sufficient throw to enable disengagement of the ring, without further disassembly. One or more lubricators may be fitted at convenient positions to take advantage of the increased load/ life afforded by lubrication 4 54-57.

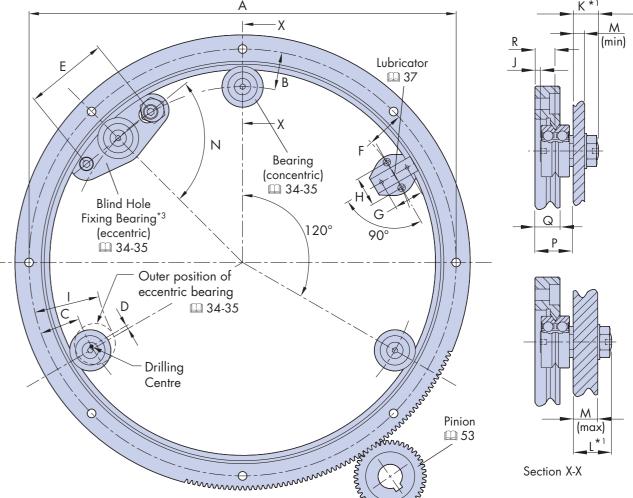



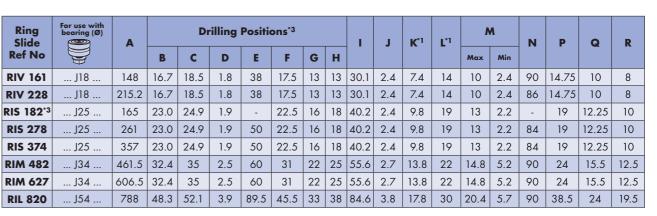

#### Notes:

- 1. Short or long stud lengths are available for each size of bearing 🕮 34-35. Choose according to the required mounting
- 2. Exact theoretical values have been given for `B`, `C` and `D`. Positional accuracy of dimension `B` will determine the axis of the ring. Positional accuracy for dimensions 'C' and 'D' are not normally critical. Holes for bearing studs should be reamed to tolerance F6 for a sliding fit.
- 3. The eccentric blind hole fixing bearing cannot be used with the RIS 182 ring slide as it clashes with the ring.



















### **Double Edge Ring Slides & Segments**



HepcoMotion double edge ring slides are manufactured from high quality steel, zone hardened on the V edges and precision ground all over with datum register faces provided both internally and externally for ease of location. Gear drive options are available with teeth machined into either the internal or external register face. The number of teeth on the standard external option is divisible by 4 and 12 in order to provide maximum choice of pinion size for exact ratio requirements. Customers may also choose the tapped hole option 'N' which enables the ring slide to be bolted from below. Stainless steel ring slides and segments are available for customers requiring corrosion resistance.

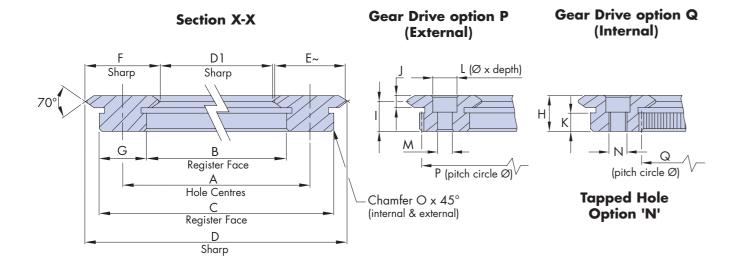


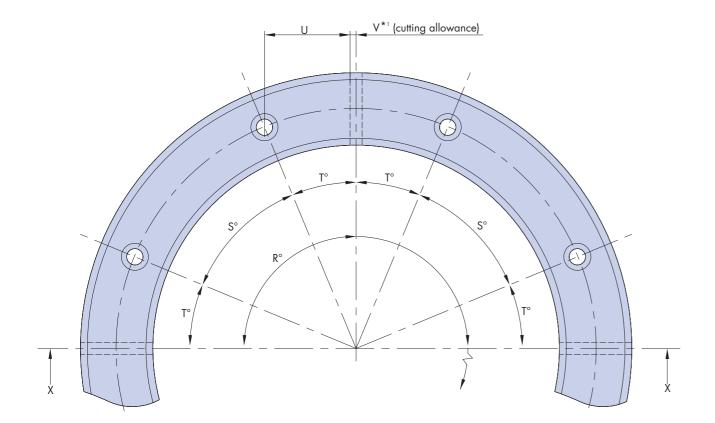

#### Notes:

- 1. Standard ring segments will be slightly less than 90° and 180° because of the cutting allowance. Full 90° and 180° segments can be supplied to customer's special order.
- 2. Socket head cap screws DIN912 will protrude 1mm above the surface of the R12 and R20 section slide rings. Customers requiring screws to be flush should use low head type DIN7984, available from Hepco upon request.

# **Double Edge Ring Slides & Segments**




HepcoMotion double edge ring segments are cut from complete 360° ring slides and held in stock in nominal 90° and 180° segments\*1. Any length segment can be cut to customer's special order and additional holes drilled as required. Although suitable for most applications, slight out of roundness and flatness may be experienced with slide rings and segments in their free unmounted condition. This may be overcome by installing against a register and bolting to a flat surface, True shape rings and segments are available on request. Please visit <a href="www.HepcoMotion.com/PRT2datauk">www.HepcoMotion.com/PRT2datauk</a> and select datasheet No. 9 True Shape Rings & Segments.

Part Number	For use with bearing (Ø)	<b>A</b> ±0.2	<b>B</b> (JS6) Register Ø	<b>C</b> Register Ø	D	DI	E ~	F	G	н	<b>l</b> ±0.025	J	К	L	M	DIN912*2 Not supplied
R12 93	J13	93	84.4 ±0.011	101.6 ±0.037	105.37	80.63	12	12.37	8.6	7.7	6.2	3	3.5	6 x 3	3.7	M3*2
R12 127	J13	127	118.4 ±0.011	135.6 ±0.037	139.37	114.63	12	12.37	8.6	7.7	6.2	3	3.5	6 x 3	3.7	M3*2
R20 143	J18	143	130.6 ±0.013	155.4 ±0.037	163.37	122.63	20	20.37	12.4	10	8	4.2	3.8	8 x 3.5	5.0	M4
R20 210	J18	210	197.6 ±0.015	222.4 ±0.037	230.37	189.63	20	20.37	12.4	10	8	4.2	3.8	8 x 3.5	5.0	M4
R25 159	J25	159	143.6 ±0.013	174.4 ±0.039	184.74	133.26	25	25.74	15.4	12.25	10	4.5	5.75	9 x 6	5.5	M5
R25 255	J25	255	239.6 ±0.015	270.4 ±0.041	280.74	229.26	25	25.74	15.4	12.25	10	4.5	5.75	9 x 6	5.5	M5
R25 351	J25	351	335.6 ±0.018	366.4 ±0.044	376.74	325.26	25	25.74	15.4	12.25	10	4.5	5.75	9 x 6	5.5	M5
R44 468	J34	468	442 ±0.020	494 ±0.046	512.74	423.26	44	44.74	26	15.5	12.5	6	7	11 x 7	6.8	M6
R44 612	J34	612	586 ±0.022	638 ±0.048	656.74	567.26	44	44.74	26	15.5	12.5	6	7	11 x 7	6.8	M6
R76 799	J54	799	748.5 ±0.025	849.5 ±0.051	875.74	722.26	76	76.74	50.5	24	19.5	9	12	20 x 13	14	M12
R76 1033	J54	1033	982.5 ±0.028	1083.5 ±0.054	1109.74	956.26	76	76.74	50.5	24	19.5	9	12	20 x 13	14	M12
R76 1267	J54	1267	1216.5 ±0.033	1317.5 ±0.057	1343.74	1190.26	76	76.74	50.5	24	19.5	9	12	20 x 13	14	M12
R76 1501	J54	1501	1450.5 ±0.039	1551.5 ±0.060	1577.74	1424.26	76	76.74	50.5	24	19.5	9	12	20 x 13	14	M12

									Ca a al			Halos with	nin ±0.2 of			0		1
		Ex	terno	ıl Gear	Int	erna	l Gear		Stoci gme		Number of holes		osition			Ă	Part	
N	0	Р	MOD	No of teeth (R=360°)	Q	MOD	No of teeth (R=360°)	`	R°		(R=360°)	S°	T°	U	V	kg~ (R=360°)	Number	
M4	0.2	100.8	0.4	252	85.2	0.4	213	90	180	360	8	45	22.5	16.8	1	0.16	R12 93	
M4	0.2	134.4	0.4	336	119.2	0.4	298	90	180	360	8	45	22.5	23.3	1	0.22	R12 127	
M6	0.4	153.6	0.8	192	132	0.8	165	90	180	360	8	45	22.5	26.3	1	0.45	R20 143	
M6	0.4	220.8	0.8	276	199.2	0.8	249	90	180	360	8	45	22.5	39.2	1	0.66	R20 210	
M8	0.5	172.8	0.8	216	145.6	0.8	182	90	180	360	8	45	22.5	29.4	1	0.77	R25 159	
M8	0.5	268.8	0.8	336	241.6	0.8	302	90	180	360	8	45	22.5	47.8	1	1.2	R25 255	
M8	0.5	364.8	0.8	456	337.6	0.8	422	90	180	360	12	30	15	44.4	1	1.65	R25 351	
M8	0.5	492	1.0	492	444	1.0	444	90	180	360	12	30	15	58.6	2	5.1	R44 468	
M8	0.5	636	1.0	636	588	1.0	588	90	180	360	16	22.5	11.25	57.7	2	6.7	R44 612	
M16	1.0	846	1.5	564	751.5	1.5	501	90	180	360	16	22.5	11.25	75.9	2	25	R76 799	
M16	1.0	1080	1.5	720	985.5	1.5	657	90	180	360	20	18	9	78.8	2	32	R76 1033	
M16	1.0	1314	1.5	876	1219.5	1.5	813	90	180	360	20	18	9	97.1	2	41	R76 1267	
M16	1.0	1548	1.5	1032	1453.5	1.5	969	90	180	360	20	18	9	115.4	2	48.7	R76 1501	1

# Ordering details:
















# **External Single Edge Ring Slides & Segments**



HepcoMotion single edge ring slides are manufactured from high quality steel, zone hardened on the V edge and precision ground all over. Datum register faces are provided both internally and externally for ease of location. Gear drive options are available with teeth machined into the internal register face. The number of teeth is divisible by 4 and 12 in order to provide maximum choice of pinion size for exact ratio requirements. Customers may also choose the tapped hole option 'N' which enables the ring slide to be bolted from below. Stainless steel ring slides and segments are available for customers requiring corrosion resistance.

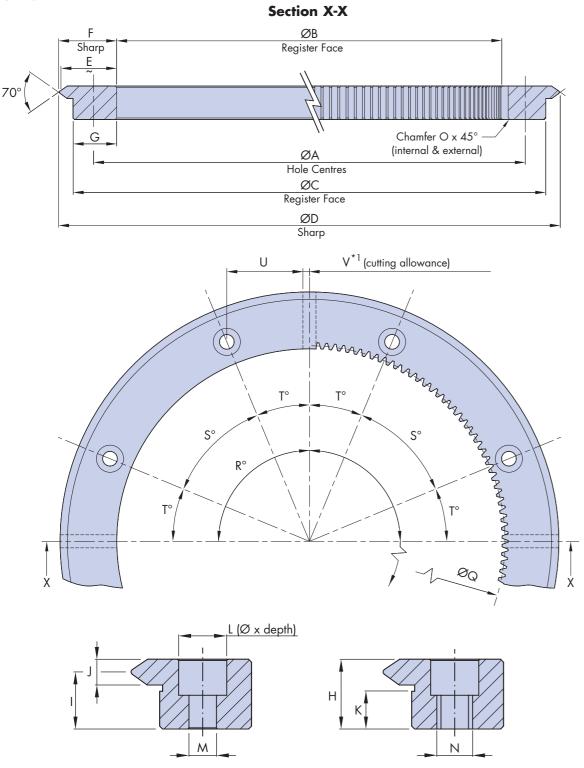

#### Notes:

28

1. Standard ring segments will be slightly less than 90° and 180° because of the cutting allowance. Full 90° and 180° segments can be supplied to customer's special order.


**Tapped Hole** 

Option N


**Standard** 

**Counterbored Hole** 

# **External Single Edge Ring Slides & Segments**



HepcoMotion ring segments are cut from complete 360° ring slides and held in stock in nominal 90° and 180° segments. Any length segment can be cut to customer's special order and additional holes drilled as required. Although suitable for most applications, slight out of roundness and flatness may be experienced with slide rings and segments in their free unmounted condition. This may be overcome by installing against a register and bolting to a flat surface. True shape rings and segments are available on request. Please visit <u>www.HepcoMotion.com/PRT2datauk</u> and select datasheet No. 9 True Shape Rings & Segments. Larger diameter single edge ring slides are available in the HDRT range for which there is a separate catalogue 🕮 61.





Part Number	For use with bearing (Ø)		B (JS6) Register Ø	<b>C</b> Register Ø	D	E ~	F	G	н	<b>l</b> ±0.025	J	K	L	M	DIN912 (not supplied)
REV 156	J18	137.6	124.6 ±0.013	148.6 ±0.037	156.97	15.8	16.18	12	10	8	4.2	3.8	8 x 4.2	5.0	M4
<b>REV 223</b>	J18	204.8	191.8 ±0.015	215.8 ±0.037	224.17	15.8	16.18	12	10	8	4.2	3.8	8 x 4.2	5.0	M4
RES 184	J25	159	142 ±0.013	174 ±0.039	184.74	20.8	21.37	16	12.25	10	4.5	5.75	10 x 5.2	5.5	M5
RES 280	J25	255	238 ±0.015	270 ±0.041	280.74	20.8	21.37	16	12.25	10	4.5	5.75	10 x 5.2	5.5	M5
RES 376	J25	351	334 ±0.018	366 ±0.044	376.74	20.8	21.37	16	12.25	10	4.5	5.75	10 x 5.2	5.5	M5
REM 505	J34	468.5	447.5 ±0.020	487.5 ±0.046	506.24	28.8	29.37	20	15.5	12.5	6	7.0	11 x 6.2	6.8	M6
REM 655	J34	618.5	597.5 ±0.022	637.5 ±0.048	656.24	28.8	29.37	20	15.5	12.5	6	7.0	11 x 6.2	6.8	M6
REL 874	J54	820	788 ±0.025	848 ±0.051	874.74	42.8	43.37	30	24	19.5	9	12	18 x 10.3	11	M10

<b>34-36</b>




		ln	ternal	Gear	Stock	Segmo	ents'1	Number of holes		±0.2 of true				Part	
N	0	Q	MOD	No of teeth (R=360°)		R°		(R=360°)	S°	T°	U	V	kg~ (R=360°)	Number	
M6	0.4	126	0.7	180	-	-	360	8	45	22.5	25.3	1	0.42	REV 156	
M6	0.4	193.2	0.7	276	-	-	360	8	45	22.5	38.2	1	0.63	REV 223	
M8	0.5	144	1	144	90	180	360	8	45	22.5	29.4	1	0.78	RES 184	
M8	0.5	240	1	240	90	180	360	8	45	22.5	47.8	1	1.27	RES 280	
M8	0.5	336	1	336	90	180	360	12	30	15	44.4	1	1.75	RES 376	
M8	0.5	450	1.25	360	90	180	360	12	30	15	58.6	2	3.93	REM 505	
M8	0.5	600	1.25	480	90	180	360	16	22.5	11.25	58.3	2	5.18	REM 655	
۸16	1.0	792	2	396	-	-	360	16	22.5	11.25	78	2	15.64	REL 874	



#### Ordering details:

**R360** = Full 360° ring



# **Internal Single Edge Ring Slides & Segments**



HepcoMotion single edge ring slides are manufactured from high quality steel, zone hardened on the V edge and precision ground all over. Datum register faces are provided both internally and externally for ease of location. Gear drive options are available with teeth machined into the external register face. The number of teeth is divisible by 4 and 12 in order to provide maximum choice of pinion size for exact ratio requirements. Customers may also choose the tapped hole option 'N' which enables the ring slide to be bolted from below. Stainless steel ring slides and segments are available for customers requiring corrosion resistance.

# **Section X-X** ØD Sharp Chamfer O x 45° (internal & external) G ØC Register Face ØA Hole Centres ØB Register Face V\*1 (cui. L (Ø x depth) M Ν

#### Notes:

1. Standard ring segments will be slightly less than 90° and 180° because of the cutting allowance. Full 90° and 180° segments can be supplied to customer's special order.


**Standard** 

**Counterbored Hole** 

**Tapped Hole** 

**Option N** 

# **Internal Single Edge Ring Slides & Segments**



HepcoMotion single edge ring segments are cut from complete 360° ring slides and held in stock in nominal 90° and 180° segments. Any length segment can be cut to customer's special order and additional holes drilled as required. Although suitable for most applications, slight out of roundness and flatness may be experienced with slide rings and segments in their free unmounted condition. This may be overcome by installing against a register and bolting to a flat surface, True shape rings and segments are available on request. Please visit www.HepcoMotion.com/PRT2datauk and select datasheet No. 9 True Shape Rings & Segments. Larger diameter single edge ring slides are available in the HDRT range for which there is a separate catalogue 4 61.

e	
00	

Part Number	For use with bearing (Ø)	<b>A</b> ±0.2	<b>B</b> Regist	(JS6) ter Ø	<b>C</b> Register Ø	D	E ~	F	G	н	<b>l</b> ±0.025	J	К	L	M	DIN912 (not supplied)
RIV 161	J18	148	161	±0.013	137 ±0.037	128.63	15.8	16.18	12	10	8	4.2	3.8	8 x 4.2	5.0	M4
RIV 228	J18	215.2	228.2	±0.015	204.2 ±0.037	195.83	15.8	16.18	12	10	8	4.2	3.8	8 x 4.2	5.0	M4
RIS 182	J25	165	182	±0.015	150 ±0.039	139.26	20.8	21.37	16	12.25	10	4.5	5.75	10 x 5.2	5.5	M5
RIS 278	J25	261	278	±0.016	246 ±0.041	235.26	20.8	21.37	16	12.25	10	4.5	5.75	10 x 5.2	5.5	M5
RIS 374	J25	357	374	±0.018	342 ±0.044	331.26	20.8	21.37	16	12.25	10	4.5	5.75	10 x 5.2	5.5	M5
RIM 482	J34	461.5	482.5	±0.020	442.5 ±0.046	423.76	28.8	29.37	20	15.5	12.5	6	7	11 x 6.2	6.8	M6
RIM 627	J34	606.5	627.5	±0.022	587.5 ±0.048	568.76	28.8	29.37	20	15.5	12.5	6	7	11 x 6.2	6.8	M6

788 820 ±0.028 760 ±0.051 733.26 42.8 43.37 30



K	L	M		
			DIN912 (not supplied)	
3.8	8 x 4.2	5.0	M4	
3.8	8 x 4.2	5.0	M4	Bear
5.75	10 x 5.2	5.5	M5	<b>3</b>
5.75	10 x 5.2	5.5	M5	
5.75	10 x 5.2	5.5	M5	
7	11 x 6.2	6.8	M6	
7	11 x 6.2	6.8	M6	
12	18 x 10.3	11	M10	Lubrio

		Ex	ternal	Gear	Stock	c Segm	ents'1	Number of holes		±0.2 of true				Part
	0	P	MOD	No of teeth (R=360°)		R°		(R=360°)	S°	T°	U	V	kg~ (R=360°)	Number
)	0.4	159.6	0.7	228	-	-	360	8	45	22.5	27.3	1	0.42	RIV 161
5	0.4	226.8	0.7	324	-	-	360	8	45	22.5	40.2	1	0.63	RIV 228
3	0.5	180	1	180	90	180	360	8	45	22.5	30.6	1	0.78	RIS 182
3	0.5	276	1	276	90	180	360	8	45	22.5	48.9	1	1.27	RIS 278
3	0.5	372	1	372	90	180	360	12	30	15	45.2	1	1.75	RIS 374
3	0.5	480	1.25	384	90	180	360	12	30	15	57.7	2	3.93	RIM 482
3	0.5	625	1.25	500	90	180	360	16	22.5	11.25	57.2	2	5.18	RIM 627
_	i e													

- - 360 16 22.5 11.25 74.9 2 15.64

24

19.5 9






#### **Ordering details:**

408


M6 M6 M8 M8 M8 M8 M8

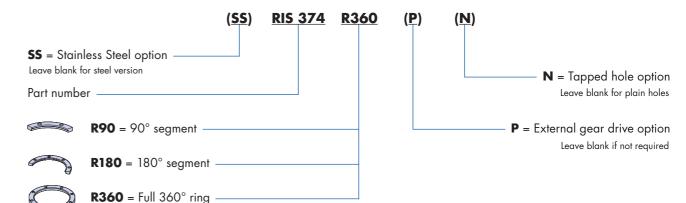


# **Ring Discs**

HepcoMotion Ring Discs are ideally suited for turntable applications where a precision platform is required for the mounting of components. Ring discs are made from high quality steel, hardened on the V edge and precision ground all over\*1. An external datum register is provided and a gear drive option is available in which the number of teeth is divisible by 4 and 12 in order to provide maximum choice of pinion size for exact ratio requirements.

All key dimensions are the same as for the corresponding size of Double Edge Ring Slide 🕮 27.

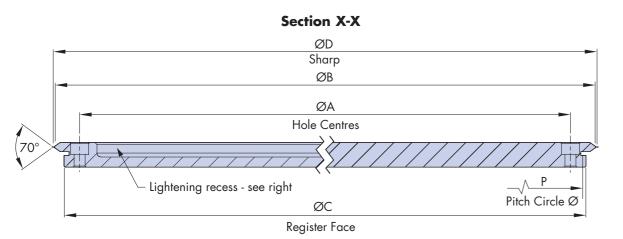


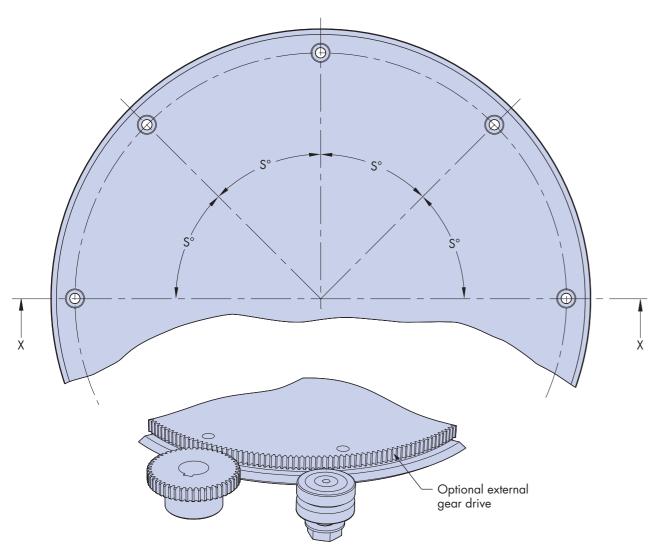

#### Notes:


1. The internal faces of the lightening recess in the lightweight version are not ground. On stainless steel ring discs, these surfaces are polished.

# **Ring Discs**



For applications where weight is an issue, a lightweight version (option 'L') is available. Stainless steel ring discs are also available, as is the tapped hole option 'N'.

Ring discs can be made to customer's specification, on request. Variations include other diameters, different thicknesses, special holes, registers or other mounting features, and alternative patterns of lightening recess.

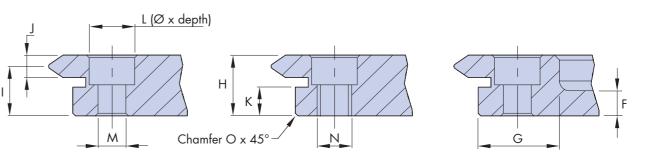




**Tapped Hole Option N** 

Lightweight Option L

Part Number	For use with bearing (Ø)	<b>A</b> ±0.2	В	<b>C</b> Register Ø	D	F	G	Н	<b>l</b> ±0.025	J	K	L
RD25 159	J25	159	184	174.4 ±0.039	184.74	5	15.4	12.25	10.0	4.5	5.75	9 x 6
RD25 255	J25	255	280	270.4 ±0.041	280.74	5	15.4	12.25	10.0	4.5	5.75	9 x 6
RD25 351	J25	351	376	366.4 ±0.044	376.74	5	15.4	12.25	10.0	4.5	5.75	9 x 6
DD44 440	12.4	440	510	40.4 .0046	510.74	4	24	155	10.5	4	7	117


м		N	0	ı	External	Gear	Number of	Holes within ±0.2 of true position		kg~	Part
141	DIN912 (not supplied)			Р	MOD	No of teeth	Holes	S°	Standard	Lightweight	Number
5.5	M5	M8	0.5	172.8	0.8	216	8	45	2.3	1.4	RD25 159
5.5	M5	M8	0.5	268.8	0.8	336	8	45	5.5	3.0	RD25 255
5.5	M5	M8	0.5	364.8	0.8	456	12	30	10.2	5.2	RD25 351
6.8	M6	M8	0.5	492	1	492	12	30	23.6	12.2	RD44 468

# Ordering details:

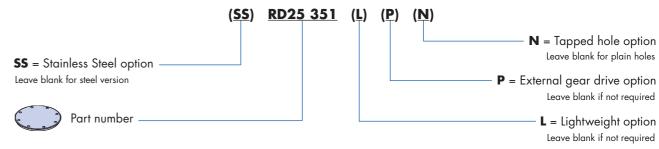









### **Bearings**



HepcoMotion PRT2 bearings are available in five sizes to suit the five ring slide sections. Bearings can be used with more than one ring size: for details, please visit www.HepcoMotion.com/PRT2datauk and select datasheet No. 11 PRT2 mix and match. The following bearing formats and fixing methods cater for most design requirements:


Twin Bearing type has the smoothest running quality, is easiest to adjust and offers some compliance to accommodate misalignment. It has two deep groove ball bearings on a single stud, and is the usual choice for many systems.

Double Row Bearing type (DR) incorporates a one-piece outer ring with two ball tracks. It offers more load capacity, life and stiffness, and copes better with debris. Dimensions are identical to the twin bearings type. DR bearings are more demanding of installation tolerances and it is recommended that they are specified with the CHK option\*4.


Nitrile Sealed option (NS) available for both bearing formats, provides better sealing against water or debris than the metal shielded type. A small increase in friction may result.

See 20 for the bearing and lubrication selector.

#### Through Fixing Type (RSJ/RLJ)

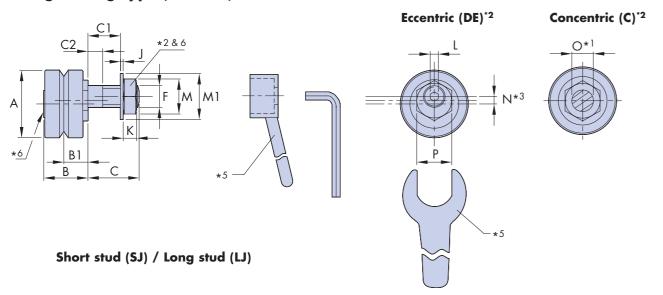

# **Bearings**




Through Hole Fixing type is available in two stud lengths covering most thicknesses of mounting plate, the short version being used in HepcoMotion carriages. Both are available in Concentric (C) which provides a datum for the system, and **Eccentric (DE)** to provide enough adjustment to permit disengagement of a carriage or ring encircled by bearings \$\Pi\$ 58.

All bearings are available in a **Controlled Height version (CHK)** which minimises variation in the B1 dimension\*4. This is desirable in high precision applications and is recommended whenever Double Row Bearings are used.

Blind Hole Fixing type (RBHJ) allows mounting into a solid machine base where through mounting holes are not possible, or where the thickness of the mounting plate is too great. The Blind Hole Fixing type is also useful where adjustment from the front is preferred or where access to the opposite side of the mounting hole is restricted. They are available in Concentric (C) which are fixed, or Eccentric (E) which are adjustable.

All bearings are greased for life internally. Customers are strongly advised to provide lubrication to the interface between bearings and ring slide by specifying HepcoMotion Lubricators 🕮 37 or Bleed Lubrication system 🕮 52. Lubrication greatly increases load capacity and life.

#### **Blind Hole Fixing Type (RBHJ)**

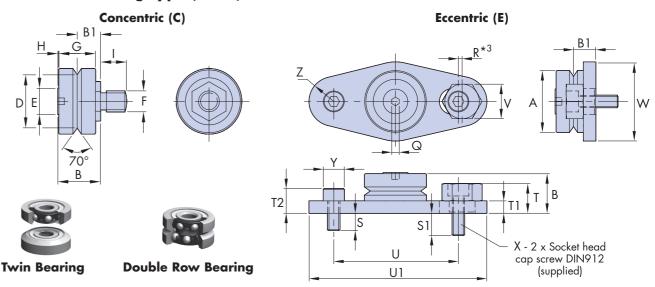

Part		For	use with				D1*/	(	С		C1	C	2		_	_					16				N:*3	0*1	
Number			23	0	A	В	B1*4	RSJ	RLJ	RSJ	RLJ	RSJ	RLJ	±0.025	E	Metric Fine	G	Н	'	J	K		M	M1	N <sup>*3</sup>	O*1 +0.0 -0.03	P
J13	R12	-	-	TNMS	12.7	10.1	5.47	5.8	9.5	3	6.7	2.2	2.4	9.51	5	M4 x 0.5	8	0.5	5.8	0.8	2.2	-	7	9	1.9	4	7
J18	R20	-	REV, RIV	TNV	18	12.4	6.75	7.4	14	3.4	10	2.4	2.5	14.00	7	M6 x 0.75	10	0.6	7.4	0.8	3.2	2.5	10	13	2.6	6	11
J25	R25	RD25	RES, RIS	TNS	25	16.6	9	9.8	19	3.8	13	2.2	4.9	20.27	10	M8 x 1	14	0.5	9.8	1	5	3	13	17	2.75	8	13
J34	R44	RD44	REM, RIM	TNM	34	21.3	11.5	13.8	22	6.6	14.8	5.2	5.9	27.13	12	M10 x 1.25	18	0.7	13.8	1.25	6	4	17	21	3.6	10	15
J54	R76	-	REL, RIL	TNL	54	34.7	19	17.8	30	8.2	20.4	5.7	7.9	41.76	25	M14 x 1.5	28	1.6	17.8	1.6	8	6	22	28	5.5	14	27

														Adjusting	Socket		<u> </u>				0	ptions Availabl	le		Downt
Q	R*3	S	S1	T	TI	T2	U	UI	V	W	Х	Υ	Z	Wrench '5	Tool '5					-	NS' <sup>7</sup>	-	DR	СНК	Part
							±0.1								9	RSJC/E	RLJC/E	RBHJC	RBHJE	Metal shields	Nitrile Seals	Twin Bearing	Double Row	Controlled Height	Number
1.5	1.0	6.25	6.6	8.5	3.75	6.75	30	47.5	8	20	M3	5.5	8	AT13	-	8	8	7	27	*	✓	✓	×	✓	J13
2	1.2	8	10.5	10	4	8	38	54	11	24.5	M4	7	7	AT18	RT6	19	20	18	45	×	✓	✓	✓	✓	J18
3	1.5	7	9	12	5	10	50	72	14	32	M5	8.5	10	AT25	RT8	48	51	43	105	✓	✓	✓	✓	✓	J25
4	2.0	9.5	8.5	17.5	6.5	12.5	60	90.5	17	42	M6	10	14	AT34	RT10	115	120	105	235	✓	✓	✓	✓	✓	J34
8	3.0	14.5	16.4	23.5	10.5	18.5	89.5	133	25	62	M8	13	20	AT54	RT14	415	425	390	800	1	1	1	<b>√</b>	1	J54

Bearing diameter

options are 13, 18, 25, 34 & 54

#### Notes:

- 1. It is recommended that holes to suit bearing mounting studs should be reamed to tolerance F6 for a sliding fit.
- Nuts and washers are supplied with both concentric and eccentric RSJ/RLJ type bearings.
- 'N' is the eccentric offset due to the double eccentric design (2 x N = total stroke). R dimension is both the eccentric offset of the adjusting nut and total stroke at the bearing centreline.
- Controlled height (CHK) bearings are selected in ±0.010mm bands in respect of the B1 dimension. They are supplied in sets of up to 50 parts as standard, with larger sets on request.
- For adjusting tool part numbers see table. For adjustment procedure and fixing nut tightening torques see 🕮 58.
- Fasteners for the through fixing type bearings are black on the concentric version and bright zinc plated on the eccentric version for identification purposes, except stainless steel type.
- 7. Stainless steel bearings are only available nitrile sealed

Ordering details: (DR) (NS) (CHK) (SS) RSJ 25 C CHK = Controlled height \*4 **SS** = Stainless steel option\*7 Leave blank for steel version **NS** = Nitrile sealed option \*7 Fixing type: **RSJ** = Short stud **RLJ** = Long stud **RBHJ** = Blind hole fixing

Bearing type: **DR** = Double row bearing Leave blank for twin bearing Journal type: **C** = Concentric (fixed) **E** = Eccentric (adjustable, RBHJ only) **DE** = Eccentric (adjustable RSJ/RLJ only)

Leave blank if not required

Leave blank for metal shields
















# **Floating Bearings**






HepcoMotion Floating Bearings incorporate caged needle rollers and are designed to provide axial movement (float) of the V position. This is especially useful where two rings or track systems are mounted apart, see application example 🛄 14.

The float compensates for parallelism tolerances between the opposing V's, eliminating additional loading and maintaining consistent running quality. Three sizes are available, each to correspond with one ring slide section, but they can be used with other sections. Please visit www.HepcoMotion.com/PRT2datauk and select datasheet No. 11 PRT2 mix and match.

Two stud lengths are available covering most thicknesses of mounting plate, the short version being compatible with HepcoMotion carriage plates. Both versions are available in **Concentric (C)** which provides a datum (in radial direction) for the system, and Eccentric (DE) which provides sufficient adjustment to allow disengagement of a carriage or ring encircled by bearings \$\square\$ 58.

All bearings are greased for life internally. Customers are strongly advised to provide lubrication to the interface between bearings and ring slide by specifying HepcoMotion Lubricators 🕮 37 or bleed lubrication system 🕮 52. Lubrication greatly increases load capacity and life.

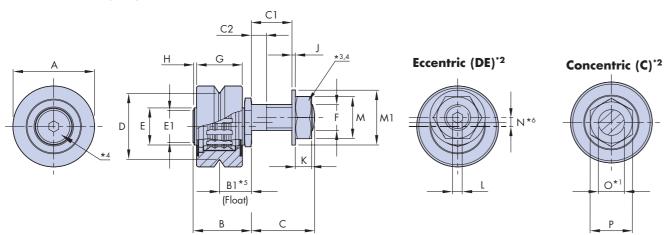

#### Short stud (RSFJ) / Long stud (RLFJ)

Part		For us	e with				B	l*5	(	:	С	1	C	2		_		_		
Number			33	0	A	B	Min	Max	RSFJ	RLFJ	RSFJ	RLFJ	RSFJ	RLFJ	±0.025	E	E1	Metric Fine	G	H ~
FJ25	R25	RD25	RES, RIS	TNS	25	18.1	9	10.5	9.8	19	3.8	13	3.4	4.9	20.27	11.5	10	M8 x 1	14	0.8
FJ34	R44	RD44	REM, RIM	TNM	34	23.2	11.5	13.5	13.8	22	6.6	14.8	5.2	5.9	27.13	16	12	M10 x 1.25	18	1
FJ54	R76	-	REL, RIL	TNL	54	37.2	19	21.6	17.8	30	8.2	20.4	5.7	7.9	41.76	28	25	M14 x 1.5	28	1.3

					.,			Adjusting Wrench '3	Socket Tool '3		g~	Max Working	Bearing Static (C) Radial Load	Co) and Dynamic d Capacities (N)	Part
J	K	L	M	M1	N <sup>*6</sup>	+0 -0.03	P	Wiend		RSFJC/DE	RLFJC/DE	Load	Co	с	Number
1	5	3	13	17	2.75	8	13	AT25	RT8	58	60	1500	6100	4900	FJ25
1.25	6	4	17	21	3.6	10	15	AT34	RT10	130	135	3000	12500	11500	FJ34
1.6	8	6	22	28	5.5	14	27	AT54	RT14	495	505	5000	28900	21500	FJ54

#### Notes:


- It is recommended that holes to suit bearing mounting studs should be reamed to tolerance F6 for a sliding fit.
- Nuts and washers are supplied with both concentric and eccentric RSFJ/RLFJ type bearings.
- For adjustment procedure and bearing fixing nut tightening torques see 4 58.
- Fasteners are black on the concentric version and bright zinc plated on the eccentric version for identification purposes.
- 'B1' dimension is the min/max axial movement of the V centre.
- 'N' is the eccentric offset due to the double eccentric design ( $2 \times N = \text{total stroke}$ ).

#### Ordering details: C RSFJ 25 Fixing type: **RSFJ** = Short Stud NS = Nitrile Sealed **RLFJ** = Long Stud Standard for all floating bearings Bearing diameter Journal Type: **C** = Concentric (fixed) (options are 25, 34 & 54) **DE** = Eccentric (adjustable)

#### Lubricators



HepcoMotion lubricators are made from impact resistant plastic and house a sprung oil impregnated felt wiper designed to apply a constant film of oil to the working surfaces of the ring slide without imposing undue friction. The application of oil significantly increases the load and life of the system. Either type of lubricator can be used with individual ring slides, segments and ring discs. The compact type can be used with Hepco fixed centre carriage plates. Customers may also consider using the HepcoMotion bleed lubrication facility suitable for track systems 22.

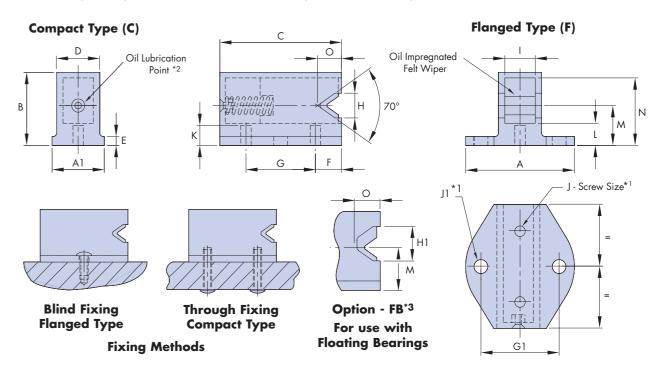


Part		F	or Use w	ith	Type F	Type C							
Number			\$ D	0	A	A1	В	С	D	E	F	<b>G</b> ±0.1	<b>G1</b> ±0.1
LB 12	R12	-	-	TNMS 12	17	7	10	13	5.2	2	3	6.5	12
LB 20	R20	-	REV, RIV	TNV 20	19	8	12	22.5	6.5	2	4.75	13	13
LB 25	R25	RD25	RES, RIS	TNS 25, TNSE	25	12	16.5	28	9.9	2	6	16	18
LB 44	R44	RD44	REM, RIM	TNM 44, TNME	34	17	20	38	15	2.4	8	22	25
LB 76	R76	-	REL, RIL	TNL 76	50	25	33.5	57	22.7	4.5	12	33	38

н	н			JI		К		м	N	0	٥	Part
п.	п	'	Ø x Length	Screw Size	Hole Ø	K	_	M	IN		<b>≜</b> g~	Number
3.1	-	3	2.5 x 5	M2.5 x 6	2.7	2.5	3	5.46	9	2.2	2	LB 12
7.2	-	4	2.5 x 10	M2.5 x 6	2.7	2.5	3.5	6.75	10.75	4.5	3	LB 20
5.5	7.1	7	3 x 10	M3 x 8	3.2	4.5	5	9	15.25	5.5	6	LB 25
7	9	11	3 x 16	M4 x 10	4.2	5.5	6.25	11.5	18.25	8	16	LB 44
10	12.6	18	3.5 x 22	M5 x 12	5.2	9	10	19	31.5	11.5	44	LB 76

#### Notes:

- 1. 2 machine screws with cross-recessed pan heads to DIN7985A are supplied for fixing the flanged type lubricator (see J1 in table). Additionally, 2 self tapping screws for plastic with PT thread form and cross-recessed pan heads are supplied for the compact type lubricator (see J in table).
- 2. Lubrication interval depends on length of stroke, duty and environmental factors. Replenish lubricant as necessary using a 68 viscosity EP mineral oil.
- 3. Size 25,44 & 76 lubricators are available with increased clearance "H1" to accommodate the "V float" of the floating bearings 🛄 36.























# **Fixed Centre Carriage**





The HepcoMotion Fixed Centre Carriage is designed for use with track systems with unidirectional bends of a common radii 40 and for use with double edge ring slides and segments 26-27. The unique geometry enables carriages on a track system to travel from straight to curve with negligible play in the transition zone. Such play as may develop is not detrimental to the performance of the system\*1.

Carriages are available with twin or double row (DR) bearings @ 34-35, and with floating bearings @ 36. Carriages with twin bearings have the smoothest running quality and have some compliance to accommodate misalignment. Carriages with DR bearings have better load capacity and stiffness. Due to the rigidity of DR bearings, carriages with this option are supplied as Controlled Height (CHK)\*5 as standard.

The corrosion resistant version has stainless steel bearings and fasteners, and a high performance USDA approved surface treatment to the aluminium carriage plate in place of the standard anodised finish.








Ratchet locking lever (variable position)

The HepcoMotion fixed centre carriage with clamping brake provides a secure method to lock the carriage in position whilst stationary. It may be used on double edge ring slides and segments but not on track systems. It is available in sizes 25, 44 & 76. Full product details are on the web: visit www.HepcoMotion.com/PRT2datauk


and select datasheet No. 7.

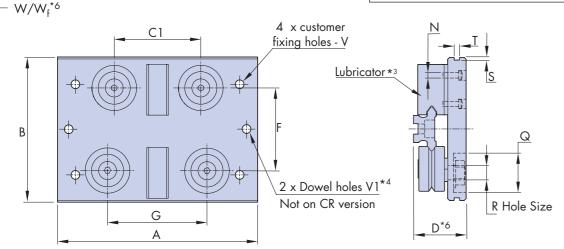

#### Notes:

- 1. Fixed centre carriages will experience a reduction in preload or a slight clearance as they pass between the curves and straights on a track system, but this is rarely an issue. This clearance is detailed on 🕮 57. Please note the FCC25 159 has a larger than normal clearance. Bogie carriages 47 are not subject to clearance.
- Offset holes in carriage for eccentric bearings necessitate adjustment rotation in the direction shown.
- It is recommended that carriages are fitted with lubricators. The quantity of lubricators may be reduced in systems with many carriages or where the bleed lubrication facility is used 🕮 52.
- Dowel holes V1 define the centre and may be used for location purposes. They are not included as standard on the corrosion resistant version, but are available on special request.
- CHK controlled height carriages use CHK bearings 💷 35 and are supplied in sets, matched by their E dimension. It is recommended to specify CHK for precision applications or where consistent carriage heights are important. CHK is standard for carriages with DR bearings.
- 6. The W dimension is greater for carriages with floating bearings see Wf in the table. Dimensions D and E will change for carriages with floating bearings. The amount of float is indicated by dimension B1 36.

# **Fixed Centre Carriage**



Part	For Use with															
Number	093	0	A	В	B1	С	C1	<b>C2</b> ±0.01	D*6	E*6	F	G	Н	I	J	K
FCC12 93	R12 93 R360/R180/R90	TR12 93	55	40	25	48	20	45	19	12.8	21.9	25.52	11.11	14.41	6.5	9.3
FCC12 127	R12 127 R360/R180/R90	TR12 127	55	40	25	48	20	45	19	12.8	21.9	23.84	10.27	13.56	6.5	8.8
FCC20 143	R20 143 R360/R180/R90	TR20 143	75	64	40	60	25	65	24.75	16.75	34.4	32.03	13.76	18.27	13	13
FCC20 210	R20 210 R360/R180/R90	TR20 210	80	64	40	65	28	70	24.75	16.75	34.4	33.06	14.28	18.87	13	12.7
FCC25 159 <sup>-1</sup>	R25 159 R360/R180/R90	TR25 159	95	80	50	85	37	80	30.5	20.5	46	50.15	22.70	27.46	16	17.1
FCC25 255	R25 255 R360/R180/R90	TR25 255	100	80	50	80	36.5	85	30.5	20.5	46	43.86	19.55	24.31	16	15.9
FCC25 351	R25 351 R360/R180/R90	TR25 351	105	80	50	85	40	90	30.5	20.5	46	45.66	20.45	25.21	16	15.6
FCC44 468	R44 468 R360/R180/R90	TR44 468	145	116	75	120	65	125	38.5	26	71.9	75.95	35.22	40.73	22	25.8
FCC44 612	R44 612 R360/R180/R90	TR44 612	150	116	75	125	70	130	38.5	26	71.9	78.80	36.64	42.16	22	25.5
FCC76 799	R76 799 R360/R180/R90	TR76 799	190	185	100	160	90	165	58.5	39	118.5	104.56	49.13	55.44	33	43
FCC76 1033	R76 1033 R360/R180/R90	TR76 1033	210	185	100	180	110	185	58.5	39	118.5	123.48	58.59	64.90	33	43
FCC76 1267	R76 1267 R360/R180/R90	TR76 1267	250	185	100	205	130	225	58.5	39	118.5	142.82	68.26	74.57	33	44
FCC76 1501	R76 1501 R360/R180/R90	TR76 1501	270	185	100	225	150	245	58.5	39	118.5	162.38	78.04	84.35	33	44

L	<b>M</b> (Ø x depth)	NØ	0	Р	Q (Ø x depth)		RØ size) (F6)	S	Т	U	V	,	<b>V1</b> Ø (K6)	w	Wf	g~	Part Number
7.8	4.5 x 4.5	2.7	11.89	10.94	12.5 x 4.8	4	+0.018 +0.010	1	3	7.34	M4	4	+0.002	10.1	-	70	FCC12 93
7.8	4.5 x 4.5	2.7	11.89	10.94	12.5 x 4.8	4	+0.018 +0.010	1	3	7.34	M4	4	+0.002 - 0.006	10.1	-	70	FCC12 127
12.3	4.5 x 2.5	2.7	18.49	17.19	15.8 x 7	6	+0.018 +0.010	1.5	4	10	M5	4	+0.002 - 0.006	12.4	-	190	FCC20 143
12.3	4.5 x 2.5	2.7	18.49	1 <i>7</i> .19	15.8 x 7	6	+0.018 +0.010	1.5	4	10	M5	4	+0.002 - 0.006	12.4	-	200	FCC20 210
14	5.3 x 4.5	3.2	24.38	23.01	22 x 8.4	8	+0.022 +0.013	2	5	11.5	M6	6	+0.002 - 0.006	16.6	18.1	400	FCC25 159'1
14	5.3 x 4.5	3.2	24.38	23.01	22 x 8.4	8	+0.022 +0.013	2	5	11.5	M6	6	+0.002 - 0.006	16.6	18.1	410	FCC25 255
14	5.3 x 4.5	3.2	24.38	23.01	22 x 8.4	8	+0.022 +0.013	2	5	11.5	M6	6	+0.002 - 0.006	16.6	18.1	420	FCC25 351
23	5.3 x 4.5	3.2	38.25	35.94	25 x 8.7	10	+0.022 +0.013	2	6	14.5	M8	8	+0.002 - 0.007	21.3	23.2	1080	FCC44 468
23	5.3 x 4.5	3.2	38.25	35.94	25 x 8.7	10	+0.022 +0.013	2	6	14.5	M8	8	+0.002 - 0.007	21.3	23.2	1100	FCC44 612
40	8.0 x 6.0	3.8	63.76	59.25	32.1 x 13.5	14	+0.027 +0.016	4	8	20	M10	10	+0.002 - 0.007	34.7	37.2	3460	FCC76 799
40	8.0 x 6.0	3.8	63.76	59.25	32.1 x 13.5	14	+0.027 +0.016	4	8	20	M10	10	+0.002 - 0.007	34.7	37.2	3660	FCC76 1033
40	8.0 x 6.0	3.8	63.76	59.25	32.1 x 13.5	14	+0.027 +0.016	4	8	20	M10	10	+0.002 - 0.007	34.7	37.2	4050	FCC76 1267
40	8.0 x 6.0	3.8	63.76	59.25	32.1 x 13.5	14	+0.027 +0.016	4	8	20	M10	10	+0.002	34.7	37.2	4250	FCC76 1501

### Ordering details:

(CR) FCC 44 612 (LB) (DR) (NS) (CHK)

**CR**\*4 = Corrosion resistant option Leave blank if not required

Part number

**LB\*3** = Lubricator option Leave blank if not required

Clamping Brake option available, please refer to PRT2 datasheet No.7 www.HepcoMotion.com/PRT2datauk **CHK**<sup>\*5</sup> = Controlled height option ☐ 35 Leave blank if not required for twin bearing version

**NS** = Nitrile sealed bearings fitted 234 Leave blank for metal shields

Bearing type: **FJ** = Floating bearings 236


**DR** = double row bearings 24

Leave blank for twin bearings

#### **Track Systems**



HepcoMotion track systems provide a unique method of achieving an almost limitless variety of open or closed circuits by combining straight slides with curved slides. They can be used in any orientation, from horizontal to vertical. Some of the more common track configurations are illustrated on this, and the opposite page. Any number of carriages can be accommodated, either the fixed centre economy type or the bogie type which enables 'S' bends or bends of varying radii to be negotiated and which has a larger platform for mounting purposes. A unique jacking screw facility incorporated within the track system enables perfect alignment of straight slides to curved slides. Various drive possibilities exist some of which are illustrated 14-18. Lubrication of the system is achieved either by means of lubricators incorporated within the fixed centre carriages or by means of the HepcoMotion bleed lubrication facility 52 which injects lubricant direct to the V faces of the track. The relevant dimensions of individual track system slides are held on record to enable spares and replacements to be supplied. Track systems are also available in stainless steel for applications requiring greater corrosion resistance.

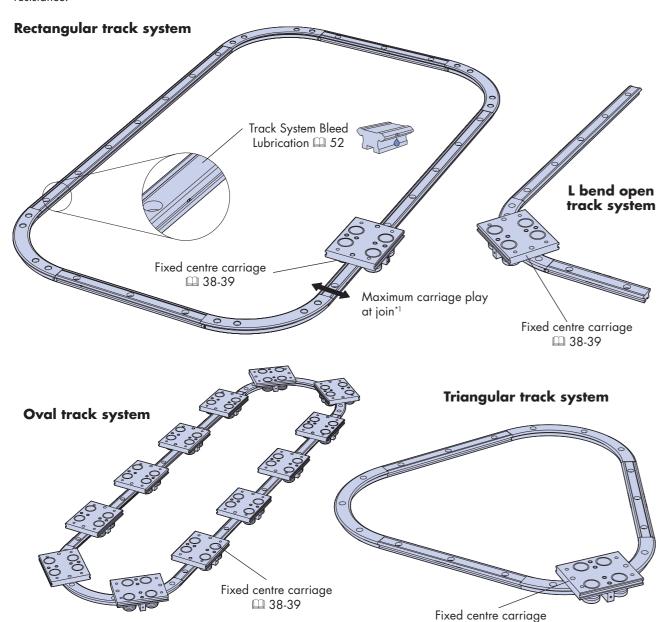

#### Installation

Installation requires manual drilling and setting. Track systems are also available in suitable grade to correspond with customers pre-drilled mounting holes. Please visit <a href="https://www.HepcoMotion.com/PRT2datauk">www.HepcoMotion.com/PRT2datauk</a> and select datasheet No. 2 Installation details.

**38-39** 

#### Notes:

- 1. With the fixed centre carriage, some slight play develops as each pair of opposing bearings traverse the join between straight and curve. This is rarely an issue in use. The maximum play acting in the direction of the arrows is given in the table on 45.
- 2. Standard curved segments will be slightly less than 90° and 180° due to the cutting allowance. This is not detrimental to the smoothness of travel across the joins. Full 90° and 180° segments and segments to any number of degrees can be supplied on request.

# **Track Systems**






















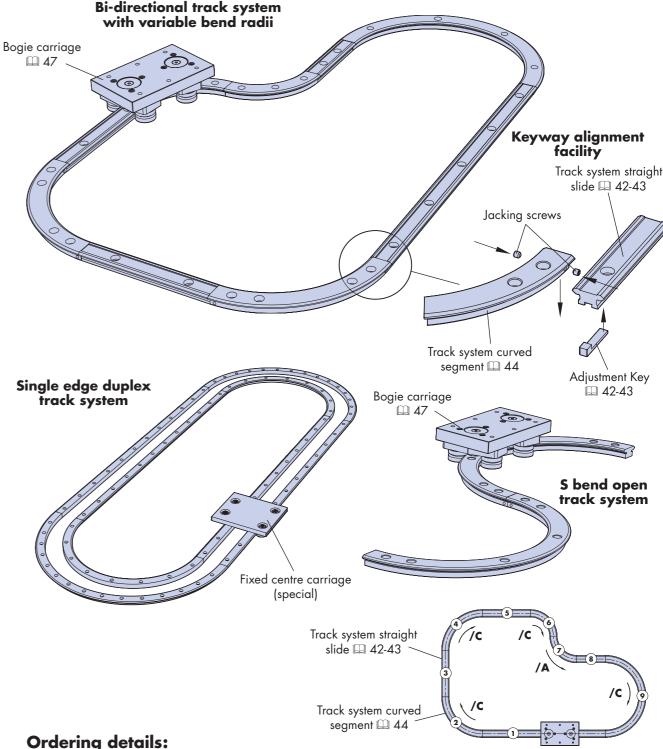


Simply list the curved segments and straight slide part numbers in a clockwise sequence beginning at any point on the track system, see above plan view of track system. Curved segments should be designated suffix 'C' for a clockwise bend and suffix 'A' for an anticlockwise bend. Final item should be quantity and part number of the carriages required. For grade of track suitable for pre-drilled holes, specify track system type 'P'. To specify bleed lubrication facility \( \mathbb{\text{\t

(I) INS25 B420 2 x AK — Irack system straight slide $\coprod$ 42-43	(6) IR25 I59 R90/C — Clockwise curved segment 44
(2) TR25 255 R90/C —— Clockwise curved segment (2) 44	(7) TR25 159 R90/A —— Anticlockwise curved segment 🕮 44
(3) TNS25 B159 2 x AK — Track system straight slide 🕮 42-43	<b>(8) TNS25 B99 2 x AK</b> — Track system straight slide □ 42-43
(4) TR25 255 R90/C —— Clockwise curved segment (2) 44	(9) TR25 255 R180/C —— Clockwise curved segment 🕮 44
<b>(5) TNS25 B165 2 x AK</b> — Track system straight slide ☐ 42-43	1 x BCP25 — Bogie carriage 🕮 47
	For fixed centre carriage 🕮 38-39

# **Track System Double Edge Straight Slides**




HepcoMotion track system straight slides are modified straight slides from Hepco's highly acclaimed GV3 system for which there is a separate catalogue, contact Hepco or visit www.HepcoMotion.com. The slides are manufactured from quality high carbon steel, zone hardened on the V faces for maximum wear resistance and precision ground for high accuracy and conformity. The centre portion of the slide is left soft to allow for customising. Standard lengths are available up to 4020mm (1976mm in the TNMS 12 section) and unlimited lengths can be achieved by butting slides together. Slides are available in stainless steel for applications requiring corrosion resistance. Sets of short slides in incremental lengths can be supplied for customers wishing to extend a system in order to take up chain or belt stretch, see application example 12. For details please visit www.HepcoMotion.com/PRT2datauk and select datasheet No. 10 Slip Block adjustment. A bleed lubrication facility is available to channel lubricant direct to the running surfaces \$\omega\$ 52.

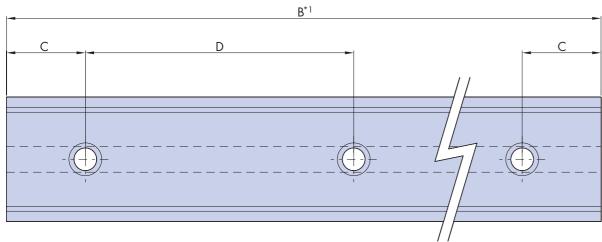







# **Track System Double Edge Straight Slides**

Adjustment Key<sup>\*2</sup> (AK)



Dowel Pin<sup>\*3</sup> (SDP)

All straight slides within a track system are matched in essential respects both with each other and with their corresponding
























	Ų.
SDP = Dowel pin (16-off) Leave blank if not required	

AK = Adjustment key (2-off)


Bleed Lubrication: **BLP** = Plain bore insert 4 52

Leave blank if not required

curved segments. They are ground square on the ends for precision butting and are marked with a reference number and sequence number for identification during installation and for replacement purposes. Opposing slides within a track system are ground to identical lengths. Adjustment keys are available to facilitate alignment with adjacent curved segments. Hepco dowel pins positioned at regular intervals along the slide keyway provide a convenient means of location and alignment. Alternatively, the ground datum faces of the slide may be set against a machined register in the mounting surface\*4.







R A1 A A A A Chamfer L x 45° (4 Positions)
--

K

Part Number	A ~	A1*5	B (max)	0.0 -0.2	D	E Ø x Depth	F	DIN912 (not supplied)	G	H +0.05 0.00	ні	<b>l</b> ±0.025	J	K*	5 L		<b>M</b> Ø (m6)	N	<b>O</b> (Kd		Р	Q	R	S	Т	U	~kg/m	Part Number
TNMS 12	12	12.37	1976	10	45	6 x 3	3.5	M3	3	4	1.8	8.5	1.7	6.2	2 0.2	4	+0.012 +0.004	-	4	+0.002	6.75	2	11	4	3	1.5	0.5	TNMS 12
TNV 20	20	20.37	4020	20	90	8 x 4	4.5	M4	4.21	5	2	12	1.75	8	0.3	5	+0.012 +0.004	1.75	4	+0.002	6	3.5	20.5	5.5	4	1.7	1.0	TNV 20
TNS 25	25	25.74	4020	20	90	10 x 5	5.5	M5	4.71	6	2.5	15	2.6	10	0.3	6	+0.012 +0.004	2.25	4	+0.002	6	6	22	7	6	2.2	1.5	TNS 25
TNM 44	44	44.74	4020	20	90	11 x 6	7	M6	6.21	8	3	26	2.3	12.	.5 0.3	8	+0.015 +0.006	2.75	6	+0.002	8	8	23	8	7	2.7	3.5	TNM 44
TNL 76	76	76.74	4020	30	180	20 x 12	14	M12	9.21	15	5	50	4.8	19.	.5 0.3	15	+0.018 +0.007	4.75	10	+0.002	15	15	32	10	11	4.5	10	TNL 76

#### Notes:

- Standard slide lengths are available in multiples of hole pitch 'D' + (2 x 'C') up to a maximum length per 'B' dimension in table above. Special length slides can be cut to order.
- Adjustment keys are required at every join between straight slide and curved slide. Please order accordingly (see ordering details).
  Please note that 'Q' dimension for the TNMS 12 & TNV 20 slides is stepped one end to fit keyway 'H'.
- Please note that dowel pins for the TNMS 12 slide are not stepped.

  Slides in their free unmounted state are not necessarily straight. They should be set to the required straightness when bolting down to the mounting surface at assembly.
- 5. For track system requirements dimensions 'A1' and 'K' will be matched with corresponding dimensions 'F' and 'I', 44

**Ordering details:** 

(SS) TNM 44 B1500 (BLP) 2 x AK (16 x SDP) **SS** = Stainless Steel option Leave blank for steel version Part Number


 $\mathbf{B}$  (slide length) = 1500mm

**BLT** = Threaded insert 4 52

# **Track System Double Edge Curved Segments**



HepcoMotion double edge track system curved segments are cut from stock rings or segments. They are matched in essential respects with their corresponding track system straight slides and ground square on the ends to a specified dimension relative to their true shape. A clearance keyway and tapped hole facility is incorporated each end to provide a method of alignment when assembled together with the mating key of the track system straight slide\*1. An additional fixing hole is provided adjacent to the keyway each end to give extra support at the join position for all segments except the TR12 93 & TR12 127. All track system curved segments are marked with a reference number and sequence number  $\square$  40-41 and are available in stainless steel for applications requiring corrosion resistance. Segments to any number of degrees can be supplied to cater for all track system configurations.

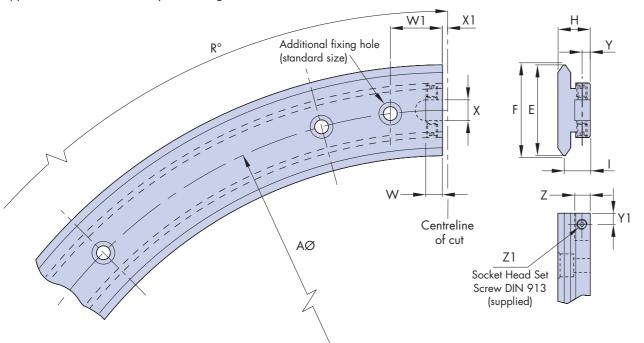

For all oth	er deta	ails a	nd dim	ension	s see 🛭	<b>26</b>	-27								
Part Number	A	E	F	н	<b> </b> ±0.025	R	<b>P</b> °	w	wı	х	X1 ±0.2	Y	Υ1	Z	Z1
TR12 93	93	12	12.37	7.7	6.2	90	180	4.25	-	2.5	1.5	1.75	2	3.25	M2.5 x 3
TR12 127	127	12	12.37	7.7	6.2	90	180	4.25	-	2.5	1.5	1.75	2	3.25	M2.5 x 3
TR20 143	143	20	20.37	10	8	90	180	6	13	4	1.5	2	3.5	4.5	M3 x 4
TR20 210	210	20	20.37	10	8	90	180	6	15	4	1.5	2	3.5	4.5	M3 x 4
TR25 159	159	25	25.74	12.25	10	90	180	7	18	7	1.5	3	5	6.5	M4 x 4
TR25 255	255	25	25.74	12.25	10	90	180	7	20	7	1.5	3	5	6.5	M4 x 4
TR25 351	351	25	25.74	12.25	10	90	180	7	20	7	1.5	3	5	6.5	M4 x 4
TR44 468	468	44	44.74	15.5	12.5	90	180	8	25	10	2.5	4	6	7.5	M5 x 6
TR44 612	612	44	44.74	15.5	12.5	90	180	8	25	10	2.5	4	6	7.5	M5 x 6
TR76 799	799	76	76.74	24	19.5	90	180	10	30	18	2.5	6	7	11.5	M8 x 16
TR76 1033	1033	76	76.74	24	19.5	90	180	10	30	18	2.5	6	7	11.5	M8 x 16
TR76 1267	1267	76	76.74	24	19.5	90	180	10	30	18	2.5	6	7	11.5	M8 x 16
TR76 1501	1501	76	76.74	24	19.5	90	180	10	30	18	2.5	6	7	11.5	M8 x 16

#### Notes:

Some distortion may be present in segments in their free unmounted state. This may be overcome by bolting to the
mounting surface and setting to adjacent slides using the keyway alignment facility 41. True Shape segments are
available on request. Please visit www.HepcoMotion.com/PRTdatauk and select datasheet No.9 True Shape
Rings & Segments.

# Ordering details:

Example:	( <u>SS</u> )	TR44 612	<u>R90</u>	( <u>N</u> )	
<b>SS</b> = Stainless Steel option ————————————————————————————————————					■ N = Tapped hole option, ☐ 26-27  Leave blank if not required
Part Number					<b>R90</b> = 90° segment <b>R180</b> = 180° segment


# **Track System Single Edge Straight Slides**




HepcoMotion track system single edge straight slides retain key features of the double edge slides, with precision ground finish and zone hardened V faces 42 & 43. Standard lengths are available up to 4020mm and unlimited lengths can be achieved by butting slides together. Slides are matched in essential respects both with each other and with their corresponding curved segments. They are ground square on the ends for precision butting and are marked with a reference number and sequence number for identification during installation and for replacement purposes 40 & 41. Slide pairs and opposing slides within a track system are ground to identical lengths

Track system single edge slides, can be used to construct a single edge duplex track system which provides a wide platform for supporting large components with extreme rigidity 17. The large rear face of the single edge slide enables a full width rack to be machined in the rear face providing for a strong drive. This can be used for the construction of a gear driven duplex track system 18.

Please visit www.HepcoMotion.com/PRT2datauk and select datasheet No. 4 Single Edge track systems.

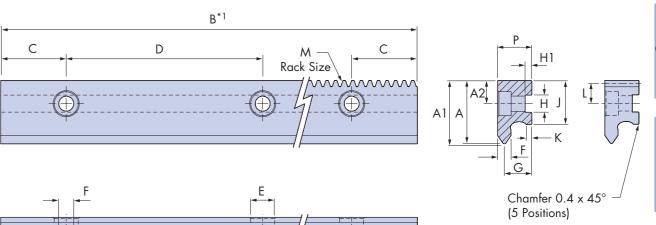






#### Notes:

- Standard slide lengths are available in multiples of hole pitch 'D' + (2 x 'C') up to a 4020mm maximum length. Special length slides can be cut to order.
- 2. Slides in their free unmounted state are not necessarily straight. They should be set to the required straightness when bolting down to the mounting surface at assembly.
- For track system requirements dimensions 'A1' and 'G' will be matched with corresponding dimensions 'F' and 'I', 46.
   Single edge slides with a rack, will be supplied in lengths that correspond to multiplies of rack pitch. The position of the ends of the slides is accurately controlled to coincide with the centre of the rack root to give perfect running joints for slides and ring segments.

#### Ordering details:





















Bleed Lubrication 52



### **Track System Single Edge Curved Segments**




HepcoMotion track system single edge curved segments are used in single edge duplex track systems 17, 18 & 41. Segments TRIS278 & TRES376 combine with TNSE track system single edges slides, and segments TRIM482 & TREM655 combine with TNME slides.

These segments are made to True Shape specification (please visit <a href="www.HepcoMotion.com/PRT2datauk">www.HepcoMotion.com/PRT2datauk</a> and select datasheet No. 9 True Shape Rings & Segments). All segment pairs in a system are matched in essential respects with each other and with their corresponding straight slides. Ends are ground square to a specific dimension. An additional fixing hole is provided at each end of the segment to give extra support at the join position. It is recommended that all single edge track system components are aligned to a machined register. Hepco will supply suitable machined plates with precision registers, on request, Please see datasheet for design criteria.

Segments are available gear cut, for mating with rack cut straight slides, to produce a gear driven track system. For more details, and for information regarding assembly, please visit <a href="https://www.HepcoMotion.com/PRT2datauk">www.HepcoMotion.com/PRT2datauk</a> and select datasheet No. 4 Single Edge Track Systems.

All track system single edge curved segments are marked with a reference and sequence number for identification and replacement purposes 40 & 41. Segments of any angle can be supplied to cater for all track system configurations.

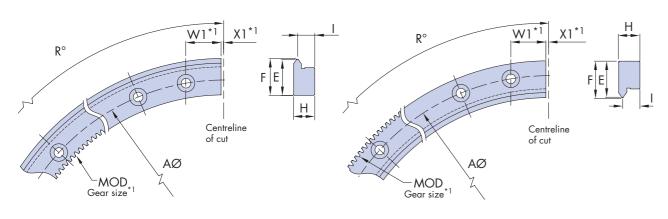

External Single Edge Track Segment - TRE

Internal Single Edge Track Segment - TRI

#### For all other details and dimensions see 28-31


Part Number	For use with	A	E~	F	н	 ±0.025	R°		W1	X1 ±0.1	MOD*1
TRIS 278	TNSE	261	20.8	21.37	12.25	10	90	180	20	1.5	1
TRES 376	TNSE	351	20.8	21.37	12.25	10	90	180	20	1.5	1
TRIM 482	TNME	461.5	28.8	29.37	15.5	12.5	90	180	25	2.5	1.25
TREM 655	TNME	618.5	28.8	29.37	15.5	12.5	90	180	25	2.5	1.25

#### Notes:


 Track system single edge segments with gear drive option Q or P will be ended to the root of a gear tooth. This will affect dimensions W1 and X1. For more details, please visit <u>www.HepcoMotion.com/PRT2datauk</u> and select datasheet No. 4 Single Edge track systems.

# Ordering details: Example: Part Number N = Tapped hole option, □ 28-31 R90 = 90° segment Q = Internal gear drive option Available on TRE option only P = External gear drive option Available on TRI option only

# **Bogie Carriage**



The HepcoMotion Bogie Carriage is designed for use with tracks where "S" bends or bends of differing radii are to be negotiated. Each bogie swivels on a special play free axial/radial ball bearing which is lubricated for life. This enables the bogie carriage to follow exactly the path of the track at all times. Carriage plates and bogie swivel plates are made from high strength aluminium alloy and finished anodised. Bogie carriages are supplied assembled and adjusted to suit the accompanying track system\*1. Customers are advised to specify the HepcoMotion bleed lubrication facility within the track \$\sigma\$ 52 as lubricators cannot be fitted to bogie carriages. Special size carriage plates are available on request.

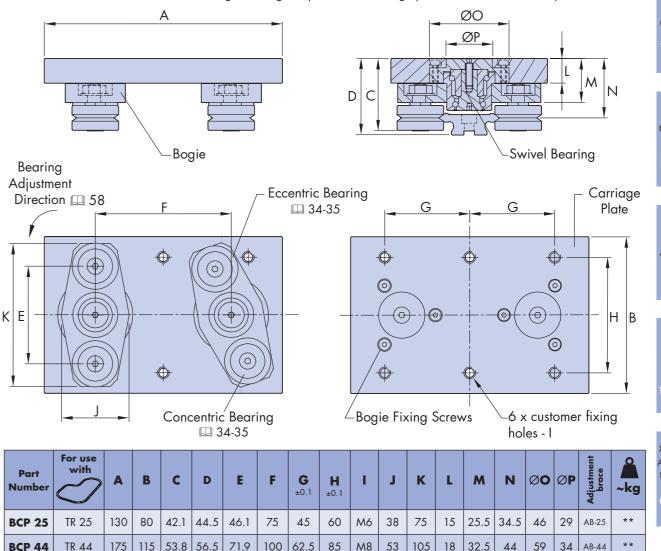

#### Notes:

**BCP 76** 

 In rare cases where adjustment of the eccentric bearings is required, the bogies must be removed from the carriage plate and bolted instead to the adjustment brace. This will mimic the carriage and provide access to the fixing nuts allowing adjustment of the eccentric bearings to take place.

125 M10

72

24

170

42.5 61.5

100 70


118.7 | 130 | 87.5

2. Please note that floating bearings and 36 cannot be supplied with bogie bearings.

240 | 185 | 77.2 | 81

#### Ordering details:

TR 76

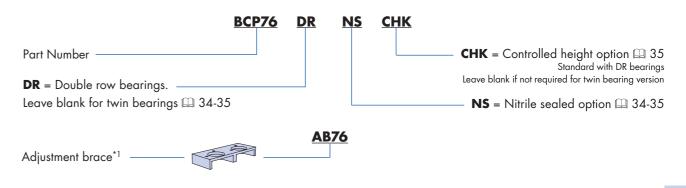

to be ables made vit the











### **Moment Load Carriage Systems**

Eccentric rollers adjusted from the front for


accessibility.



HepcoMotion moment load carriage systems provide extra support and rigidity in applications where high downwards or offset loads are anticipated, typically at work stations. It is also possible to arrange for continuous support of the carriages all around the circuit. Moment load carriages are a variation of the standard fixed centre carriages 🕮 38-39 and are available in all 25 and 44 equivalent sizes. Carriages can be ordered complete with the carriage locking system and with either the fixed latch or trip latch belt connection facility.

Please visit www.HepcoMotion.com/PRT2datauk and select datasheet No. 5 Moment Load carriage systems for more details. For other compatible driven system components in main illustrations below see 🛄 50-51.





Moment load carriage systems are available with two types of work station support, both designed to connect to the track system support beam:

Static roller type: with eccentrically adjusted rollers attached to the framework bearing against a fixed skid plate on the underside of the carriage. This reduces the total number of rollers required and therefore the cost of a system with many carriages but few work stations.

Dynamic roller type: with eccentrically adjusted rollers attached to the underside of the carriage, bearing on adjustable height support track. The combination of these adjustable features facilitates set up where accuracy and alignment cannot be guaranteed or where continuous support for the carriage is required all around the circuit.

Standard components, shown in the unframed illustrations, can also be used within customers special designs a number of which are shown in the framed illustrations. Special size carriages can be easily supplied.

(fixed latch also available)

**Skid plate** 


Track system support beam □ 50-51


**Moment Load Carriage** (static roller type)




















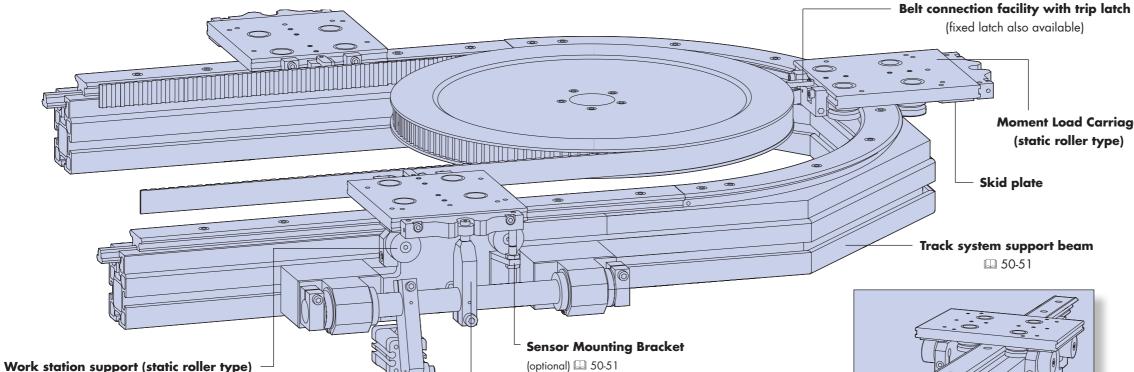

**Carriage Locking System** 

(optional) 🕮 50-51

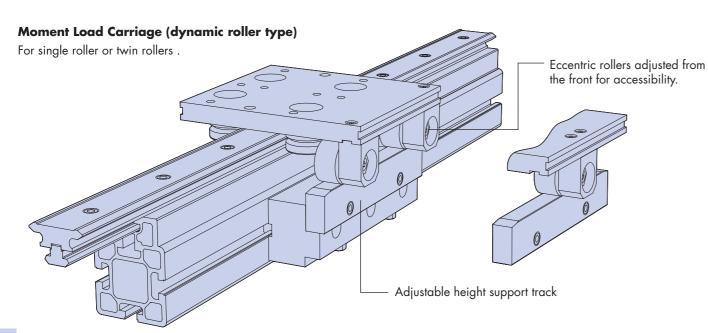



Static roller type with docking station

either side

Dynamic roller type with extra long carriage

### **Driven Track System Components**




HepcoMotion supply a comprehensive range of components and assemblies to enable the 25-351 and 44-612 size track systems to be incorporated into customers own designs complete with drive facility. Many of the components shown below can be also be used for other sizes of track system. The components are well proven having been used for many years in the HepcoMotion DTS, a complete ready to use Driven Track System highly recommended for customers able to use this fully assembled standard product.

# **Driven Track System Components**

Moment load carriage systems 🕮 48-49 are also compatible with the DTS which is the full system as illustrated below and is comprehensively detailed in a separate catalogue. Please contact Hepco or visit www.HepcoMotion.com.

#### For all details of Driven Track System components please visit www.HepcoMotion.com/PRT2datauk and select datasheet No. 8

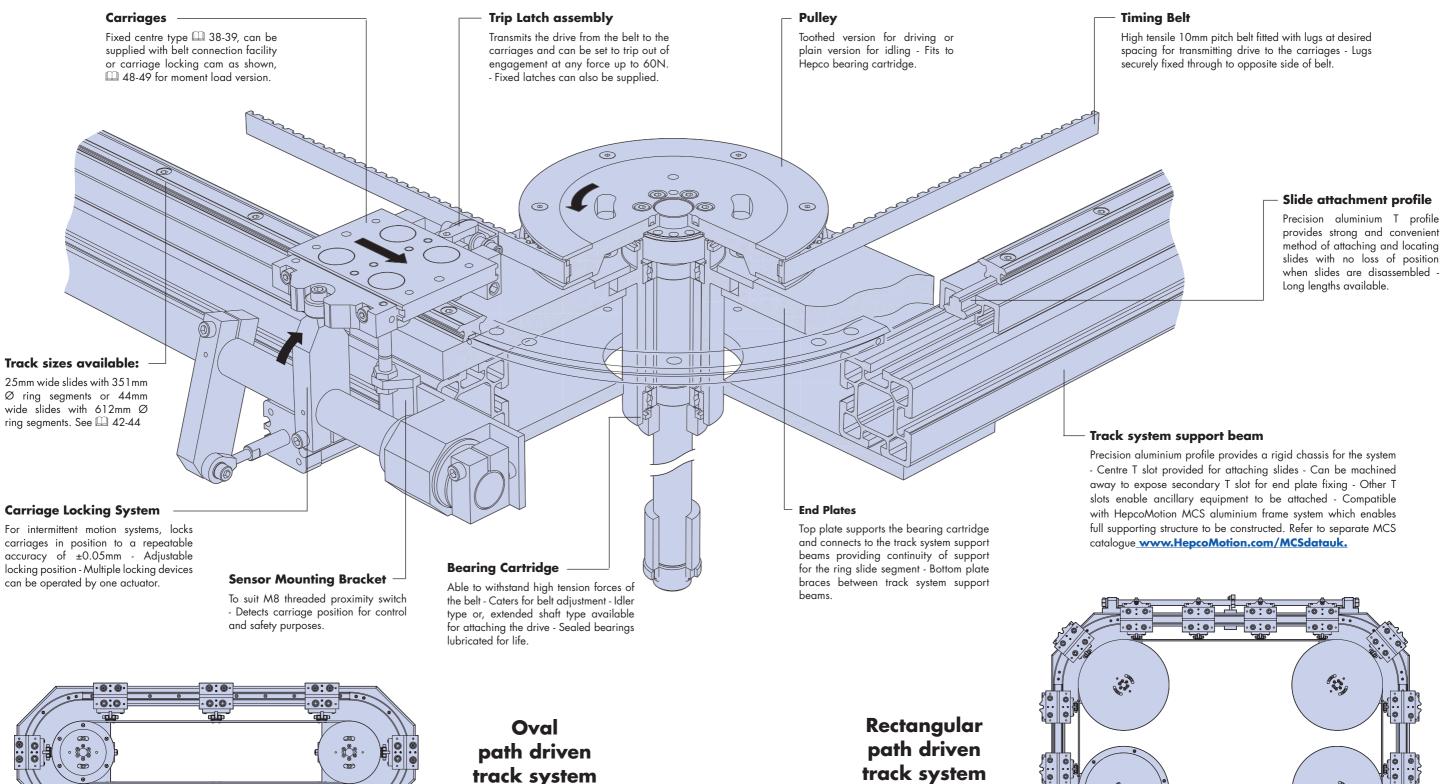





















#### **Bleed Lubrication**



The HepcoMotion bleed lubrication facility channels lubricant direct to the V faces of a straight slide for best lubrication of a track system. The felt inserts of the lubricators fitted to the carriages\*1, collect the lubricant and distribute it around the circuit. Some of the lubricant is absorbed into the felts which act as reservoirs and help prevent excess oil accumulating. The bleed lubrication facility is available with either an M5 screw fitting insert or, an O ring seal insert as illustrated. Connection can be made to any centralised lubrication system or pressure feed canister (part no. PRT2BLC available from Hepco).

Also available is a highly efficient oil dispensing pump and controller which can be programmed to meter a set dose of lubricant according to the distance travelled by the carriages. Both the dose and distance travelled can be set according to the length of circuit and duty. For details of inserts and oil dispensing system, please visit www.HepcoMotion.com/PRT2datauk and select datasheet No. 6 Bleed Lubrication.

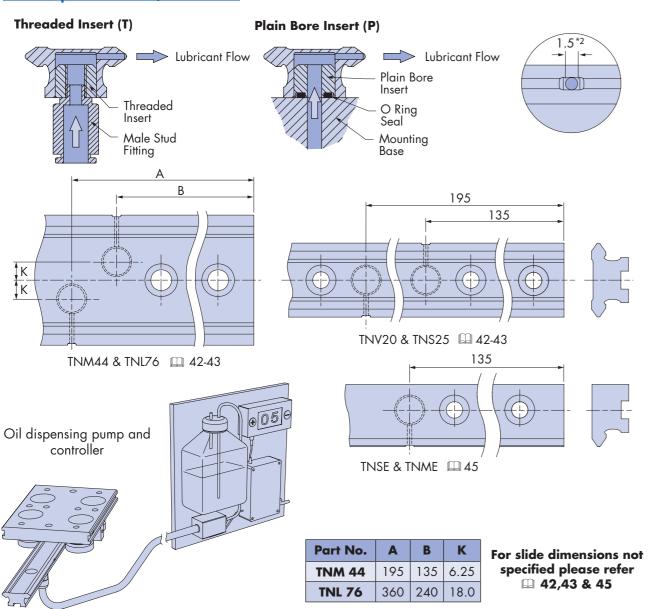

#### Notes:

**52** 

- 1. Track systems with bleed lubrication facility require only one in four carriages to be fitted with lubricators. This will also have the effect of reducing system friction.
- 2. Hole Diameter for TNL76 slide is 2mm. For more details, please visit www.HepcoMotion.com/PRT2datauk and select datasheet No. 6 Bleed Lubrication.

#### Ordering details:

Example:	SS	TNM 44	<u>BLP</u>	B1500	2 x AK
Please state BLP or BLT within the slide part number.	ne straig	ht		Rlaad	Lubrication facility: <b>BLP</b> = Plain bore insert
42-43 for double edge strai		es.		Dieea	BLT = Threaded insert
45 for single edge straight	slides.				

#### **Pinions**




HepcoMotion pinions are compatible with gear cut ring slides, segments and ring discs 🕮 26-33. Gear teeth have a 20° pressure angle.

Pinions smaller than 1 module are made in unhardened stainless steel with teeth that conform to ISO 1328 grade 10. These are supplied with a plain bore (B type), with a keyway and set screw (BK type for bores of 8mm and above) or with set screw only (BK type for bores below 8mm\*1).

Pinions with modules of 1 and above have hardened and ground teeth, conform to ISO 1328 grade 6 and are available in both steel and stainless steel. These pinions are supplied with a plain bore (B type) or with keyway and set screw (BK type).

In all cases, the pinion and slide ring teeth should be lubricated. A range of pinions with integral shaft, suitable for hollow shaft connection to Hepco supplied AC geared motors and other motors is available from the HepcoMotion GV3 product range, please visit www.HepcoMotion.com.

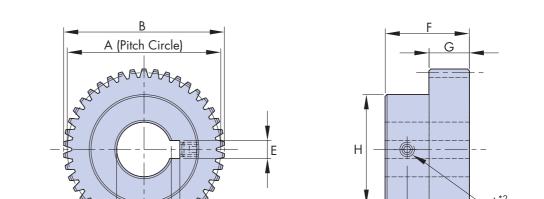




	<del>▼ F</del>
	G
	-
<b>A</b>	
н —	<del></del>
<u> </u>	L*2

		For U	lse with	1	al.3	on.4	Iso	No.	e le											2
Part Number		$\bigcirc$		A	Material*	Condition	1328 Grade	of teeth	Module	AØ	BØ	С	D*1	E*1	F	G	Н	I	L*2	g~
SSP04 W3.5 T42	R12	-	-	-	SS	×	10	42	0.4	16.8	17.6	5	-	-	10	3.5	10	3	М3	10
SSP07 W9 T28	-	,	REV, RIV	•	SS	×	10	28	0.7	19.6	21	5	-	-	17	9	16	4	М3	31
SSP08 W4 T48	R20	-	-	-	SS	×	10	48	0.8	38.4	40	12	1.8	4	12	4	26	4	M3	50
SSP08 W6 T48	R25	RD25	-	-	SS	×	10	48	0.8	38.4	40	12	1.8	4	14	6	26	4	M3	<i>7</i> 5
P10 W11 T42	-	-	RES, RIS	TNSE	ST/SS	✓	6	42	1	42	44	15	2.3	5	23	11	30	6	M4	160
P10 W7 T48	R44	RD44	-	-	ST/SS	✓	6	48	1	48	50	15	2.3	5	18.5	7	27	5.75	M4	170
P125 W14 T34	-	-	REM, RIM	TNME	ST/SS	✓	6	34	1.25	42.5	45	15	2.3	5	25.5	14	30	5.75	M4	200
P15 W12 T48	R76	-		-	ST/SS	✓	6	48	1.5	72	75	15	2.3	5	25	12	30	6.5	M4	350
P20 W20 T27	-	-	REL, RIL	-	ST/SS	✓	6	27	2	54	58	20	2.8	6	35	20	40	7.5	M5	430

#### Notes:

- 1. Small "BK" type pinions with bores below 8mm are supplied with set screw through to the bore but without keyway. It is usual practice to secure these pinions by means of a set screw onto a flat on the shaft or by using a taper pin.
- 2. Pinions are supplied with a flat point set screw DIN 913 (ISO 4026).
- ST = Steel, SS = Stainless Steel
- 4. ✓ = Teeth hardened and ground. x = Teeth unhardened and unground.

#### Ordering details:























### **Load Capacity and Life**

The load capacity and life expectancy of HepcoMotion ring slides, segments and track systems is determined by many factors including the ring size, the type and number of bearings, the presence of lubrication, the magnitude and direction of loads, the speed and the distance travelled.

It is usual to run systems at much less than the maximum load to prolong life, which can be calculated using the data and formulae in this section. For calculation purposes, systems fall into two categories, those where a carriage runs on a ring slide, segment or track system and those where a ring slide is captivated and rotates in a number of bearings (or the similar arrangement where the ring slide is stationary and the bearings and load rotate).

Where possible, systems should be oiled using Hepco lubricators 

37 and/or the bleed lubrication system 

52. This will greatly extend system life.

# Systems with carriages

When calculating the life, first the load on each carriage should be resolved into the direct load components L<sub>1</sub> and L<sub>2</sub> and moment load components M, My and Ms.

#### **Carriage Load Capacities**

Capcities are shown for both 'dry' and 'lubricated' conditions - this refers to the bearing and slide 'V' contact, since all bearings are lubricated internally for life. Values are based on shock-free duty.

Carriage	Dry Sys	tem (Tw	in and D	R Type Bo	earings)	Lubrico	ited Syst	em (Twir	Type Be	arings)	Lubric	ated Sys	tem (DR	Type Bed	ırings)
Part	L <sub>1(max)</sub>	L <sub>2(max)</sub>	Ms(max)	My(max)	M <sub>(max)</sub>	L <sub>1(max)</sub>	L <sub>2(max)</sub>	Ms(max)	My(max)	M <sub>(max)</sub>	L <sub>1(max)</sub>	L <sub>1(max)</sub> L <sub>2(max)</sub> M <sub>S(max)</sub> M <sub>V(max)</sub>			
Number	N	N	Nm	Nm	Nm	N	N	Nm	Nm	Nm	N	N	Nm	Nm	Nm
FCC 12 93	90	90	0.5	1	1	240	240	1.3	2.7	2.7		N	ot Availab	ole	
FCC 12 127	90	90	0.5	1	1	240	240	1.3	2.6	2.6					
FCC 20 143	180	180	1.6	2.5	2.5	500	400	4.5	5.5	7	760	1200	7	16	10
FCC 20 210	180	180	1.6	2.7	2.7	500	400	4.5	6	7.5	760	1200	7	18	11
FCC 25 159	400	400	4.5	8.5	8.5	1280	1200	14	25	27	1600	3000	18	64	33
FCC 25 255	400	400	4.5	8	8	1280	1200	14	23	25	1600	3000	18	60	31
FCC 25 351	400	400	4.5	8.5	8.5	1280	1200	14	24	27	1600	3000	18	63	33
BCP 25	400	400	4.5	15	15	1280*1	1200*1	14*1	45*1	48*1	1600*1	3000*1	18*1	110*1	60*1
FCC 44 468	800	800	16	28	28	3200	2800	64	95	110	3600	6000	73	210	120
FCC 44 612	800	800	16	29	29	3200	2800	64	100	115	3600	6000	73	220	130
BCP 44	800	800	16	40	40	3200*1	2800*1	64*1	140*1	160*1	3600*1	6000*1	73*1	300*1	180*1
FCC 76 799	1800	1800	64	85	85	7200	6400	250	300	340	10000	10000	360	470	470
FCC 76 1033	1800	1800	64	105	105	7200	6400	250	360	410	10000	10000	360	570	570
FCC 76 1267	1800	1800	64	120	120	7200	6400	250	420	480	10000 10000 360 670 6				
FCC 76 1501	1800	1800	64	140	140	7200	6400	250	480	550	10000	10000	360	770	770
BCP 76	1800	1800	64	115	115	7200 <sup>*1</sup>	6400*1	250*1	415*1	460*1	10000*10000*1 360*1 650*1 65				

The  $L_2$  &  $M_V$  load capacities for carriages using floating bearings  $\square$  36 are the same as is shown above for DR bearings. The L<sub>1</sub> & M<sub>5</sub> load capacities for carriages using floating bearings are zero (they are free to float in these directions). Please note that bogie carriages (BCP) are not available with floating bearings.

To determine life, calculate the load factor LF using equation [1] below, then use equation [3] or [4] to determine life for the

$$[1] \quad L_F = \ \frac{L_1}{L_{1(max)}} \ + \ \frac{L_2}{L_{2(max)}} \ + \ \frac{M_S}{M_{S(max)}} \ + \ \frac{M_V}{M_{V(max)}} \ + \ \frac{M}{M_{(max)}} \ \le 1 \ \text{or } 0.8 \ \text{for stainless steel}$$

#### Notes:

- 1. In heavily loaded applications using bogie carriages, the bogie swivel bearings can affect life. Applications for bogie carriages in which L<sub>F</sub> is more than 0.43, calculated using the \*1 load figures from the table above, should be referred to Hepco to confirm suitability.
- 2. When calculating L<sub>2</sub> and M<sub>5</sub> loadings, the centrifugal force must be included which acts radially outwards from the centre of mass (COM) of the moving object. Its magnitude is  $F = DV^2/R$ , where V is the velocity of the COM in m/s, R is the distance of the COM from the ring axis in metres and D is the mass in kg. F is in N (newtons).


#### **Technical**


### Systems with Ring Slides in Bearings

It is usual to space bearings equally around the ring\*1 When calculating the life, the load should be resolved into the direct load components LA and LR and the moment load component M, as shown in the diagram

#### **System Load Capacities**

Capcities are shown for both 'dry' and 'lubricated' conditions - this refers to the bearing and slide 'V' contact, since all bearings are lubricated internally for life. Values are based on shock-free duty.

















Bearing Part	Used with	Number of equally		ystem (1 Type Bed	win and arings)		ricated n Type B	System learings)	Lubricated System (DR Type Bearings)			
Numbers	Ring	spaced	L <sub>A</sub> (max)	L <sub>R</sub> (max)	M(max)	L <sub>A</sub> (max)	L <sub>R(max)</sub>	M(max)	L <sub>A</sub> (max)	L <sub>R(max)</sub>	M(max)	
	Slides	bearings	N	N	Nm	N	N	Nm	N	N	Nm	
		3	67	38	16 x Øc*4	180	102	43 x Øc*4		Not Avail	able	
J13	R12	4	83	45	19 x Øc*4	220	120	52 x Øc*4		Not Avail	able	
		Each additional 1	10	6	2 x Øc*4	43	30	9 x Øc*4		Not Avail	able	
	R20	3	135	<i>7</i> 6	32 x Øc*4	375	170	90 x Øc*4	570	510	135 x Øc*4	
J18	REV	4	165	90	39 x Øc*4	465	200	108 x Øc*4	700	600	165 x Øc*4	
	RIV	Each additional 1	21	13	4 x Øc*4	90	50	18 x Øc*4	135	150	28 x Øc*4	
	R25	3	300	170	72 x Øc*4	960	510	230 x Øc*4	1200	1280	285 x Øc*4	
J25	RES	4	370	200	87 x Øc*4	1190	600	278 x Øc*4	1480	1500	340 x Øc*4	
	RIS	Each additional 1	48	30	9 x Øc*4	230	150	48 x Øc*4	285	375	60 x Øc*4	
	R44	3	600	340	140 x Øc*4	2400	1200	570 x Øc*4	2700	2550	640 x Øc*4	
J34	REM	4	740	400	170 x Øc*4	2950	1400	690 x Øc*4	3340	3000	780 x Øc*4	
	RIM	Each additional 1	96	60	19 x Øc*4	570	350	120 x Øc*4	640 750 135 x Øc*4			
	R76	3	1350	765	320 x Øc*4	5400	2740	1290 x Øc*4	7500 4250 1800 x Øc*4			
J54	REL	4	1670	900	390 x Øc*4	6650	3200	1560 x Øc*4	4 9300 5000 2170 x &			
	RIL	Each additional 1	210	130	44 x Øc*4	1290	800	270 x Øc*4	1800	1250	375 x Øc*4	

The  $L_R$  load capacities for systems using floating bearings  $\square$  36 are the same as is shown above for DR bearings. The LA & M load capacities for systems using floating bearings are zero (they are free to float in these directions).

To determine the life of this system, first obtain a value for the load factor LF by entering the values for LA, LR and M in respect of the proposed duty into equation [2] below, together with the maximum load capacities from the table above.

[2] 
$$L_F = \frac{L_A}{L_{A(max)}} + \frac{L_R}{L_{R(max)}} + \frac{M}{M_{(max)}} \le 1 \text{ or } 0.8 \text{ for stainless steel}$$

The life is then determined using equations [3] or [4] on on the next page.

#### Notes:

- 1. In some applications where the bearings rotate with the load, it may be beneficial to distribute the bearings unequally around the ring. Contact Hepco for application advice.
- 2. SPEED OF OPERATION. Hepco ring slides, segments and track systems are rated for speeds of 1m/s without lubrication or 5m/s when lubricated, but take care to allow for intertial loads. Greater speeds may be tolerated at reduced loads. Contact Hepco for details.
- 3. SHORT STROKE OPERATION. If the stroke length is less than five times the bearing outside diameter, then calculate the life as if the stroke is five times the bearing outside diameter
- 4. Øc is ring slide contact diameter in metres (the diameter of the circle through the mid position of the contact points between the bearings and the ring).

#### **Technical**

#### **Calculating System Life**

With  $L_F$  determined for either a 4 bearing carriage  $\square$  54 or for a ring system  $\square$  55, the life in km can be calculated using one of the two equations below. In these equations, the Basic Life is taken from the table on the right in respect of the bearings and the lubrication condition applicable.

For dry systems use equation [3]:

[3] System life (km) = 
$$\frac{B_L}{(0.03 + 0.97L_F)^2}$$

For lubricated systems use equation [4]:

[4] System life (km) = 
$$\frac{B_L}{(0.03 + 0.97L_F)^3}$$

Example load-life calculations for PRT2 systems are available online. Please visit <a href="https://www.HepcoMotion.com/PRT2datauk">www.HepcoMotion.com/PRT2datauk</a> and select datasheet No. 3 Load Life Calculations.

Bearings	Basic Life Dry	Basic Life Lubricated
J13	40	40
SSJ13	30	30
J18	50	60
SSJ18	35	45
J18DR	50	60
SSJ18DR	35	45
J25	70	40
SSJ25	40	25
J25DR	70	45
SSJ25DR	40	35
J34	100	70
SSJ34	60	50
J34DR	100	160
SSJ34DR	60	120
J54	150	150
SSJ54	100	110
J54DR	150	280
SSJ54DR	100	220

The above data assumes that steel bearings run on steel rings, and that stainless steel bearings run on stainless steel rinas.

# **Industry Standard Bearing Load Capacities**

The load capacities and calculations in the previous sections have been carefully developed, and are based on rigorous testing and years of application experience.

Many competitive systems use industry standard, theoretically derived figures for bearing static and dynamic load capacities, which are generally higher than the true working load capacities which Hepco uses.

The table below shows the industry standard static ( $C_{OR} \& C_{OA}$ ) and dynamic ( $C_R \& C_A$ ) load figures for PRT2 bearings (R & A subscripts indicate radial & axial loading). These are included principally to allow the comparison of Hepco components with those from other manufacturers. It is NOT recommended that they are used for determining system life.

For each of two Twin		Bearing Dynamic & Static Load Capacities (N)						
Bearings	C <sub>R</sub>	C <sub>A</sub>	C <sub>OR</sub>	C <sub>OA</sub>				
J13	695	194	265	74				
J18	1438	419	593	173				
J25	3237	<i>7</i> 91	1333	326				
J34	5291	1270	2600	557				
J54	13595	2320	6657	1136				

For Double Row			Dynamic & Static Capacities (N)					
Bearings	C <sub>R</sub>	C <sub>A</sub>	C <sub>OR</sub>	C <sub>OA</sub>				
-	-	-	-	-				
J18DR	2301	857	1168	435				
J25DR	5214	1618	2646	821				
J34DR	9293	2523	5018	1362				
J54DR	21373	4601	12899	2777				

For Floating	Dynamic & Static Load Capacities (N)				
Bearings	C <sub>R</sub>	C <sub>OR</sub>			
-	-	-			
-	-	-			
FJ25	4900	6100			
FJ34	11500	12500			
FJ54	21500	28900			

The above load capacities apply to standard steel bearings. Stainless steel bearings may be different.

#### **Technical**

#### **Pinion and Gear Force Calculations**

The driving force which can be transmitted through a pinion and gear will depend on the tooth (Mod) size, the size of pinion and ring or segment selected, the length of stroke and the desired life.

The table below details the tangential driving force in newtons (N) for all pinion and ring combinations and for a useful range of design lives. The figures assume that the pinion revolves around the complete ring, rather than moving to and fro over just a portion of the ring's teeth. The load capacity for shorter strokes will be lower.

All figures assume ideal lubrication and pinion contact conditions. It is recommended that a safety factor be applied when selecting gear and pinion components. This table is suitable for selection of parts, but please contact Hepco if a specific calculation is required for a particular application.

For rack-cut track systems using single edge straight slides, the max driving force will be the same as for the largest diameter Rl... ring which has the matching section size.

Pinion Part Number	Used with	Max Working Tangential Load (N)  Life - distance travelled around Ring Gear					
Homber	Ring	1 000 km	5 000 km	25 000 km			
CCDO 4 14/2 E T42	R12 93	50	30	25			
SSP04 W3.5 T42	R12 127	40	30	25			
	REV 156	150	100	75			
SSP07 W9 T28	REV 223	155	100	80			
22L0\ MA 158	RIV 161	150	100	75			
	RIV 228	155	100	80			
SSP08 W4 T48	R20 143	100	80	60			
	R20 210	110	85	65			
	R25 159	155	120	95			
SSP08 W6 T48	R25 255	165	125	100			
	R25 351	170	130	100			
	RES 184	960	730	530			
P10 W11 T42 & SSP10 W11 T42	RES 280	970	850	640			
	RES 376	970	880	660			
	RIS 182	960	730	530			

Pinion Part	Used	Max Working Tangential Load (N)							
Number		Life - distance	travelled arou	nd Ring Gear					
	Killy	1 000 km	5 000 km	25 000 km					
P10 W11 T42 &	RIS 278	970	850	640					
SSP10 W11 T42	Tangential Load (N)           Life - distance travelled around Ri           1 000 km         5 000 km         25           RIS 278         970         850           RIS 374         970         880           R44 468         630         585           R44 612         760         585           REM 505         1510         1400           REM 655         1820         1400           RIM 482         1510         1400           RIM 627         1820         1400           R76 799         1950         1560           R76 1033         1950         1640           R76 1501         1950         1640           R76 1501         1950         1640           REL 874         3990         2530	680							
P10 W7 T48 &	R44 468	630	585	470					
SS P10 W7 T48	R44 612	760	585	470					
P125 W14 T34 & SS P125 W14 T34	REM 505	1510	1400	960					
	REM 655	1820	1400	990					
	RIM 482	1510	1400	970					
	RIM 627	1820	1400	990					
	R76 799	1950	1560	1290					
P15 W12 T48 &	R76 1033	1950	1640	1290					
SS P15 W12 T48	R76 1267	1950	1640	1290					
	R76 1501	1950	1640	1290					
P20 W20 T27 &	REL 874	3990	2530	1890					
SS P20 W20 T27	RIL 812	3990	2530	1890					
For racks on TNSER s	For racks on TNSER slides use RIS 374 figures & for TNMER slides use RIM 627 figures								













# **Fixed Centre Carriage Play at Track System Joints**

HepcoMotion fixed centre carriages have the same fit on both straight slides and curved segments in a track system. As the carriage traverses the join between these two components, slight play develops between each pair of opposing bearings. The maximum play is given in the table below.

Carriage Type	FCC 12 93	FCC 12 127	FCC 20 143	FCC 20 210	FCC 25 159	FCC 25 255	FCC 25 351	FCC 44 468	FCC 44 612	FCC 76 799	FCC 76 1033	FCC 76 1267	FCC 76 1501
Maximum Clearance /mm	0.17	0.08	0.18	0.10	0.47*	0.15	0.09	0.21	0.14	0.22	0.19	0.17	0.16

These figures are theoretical clearances. In most applications, the bearings are slightly preloaded against the slides, and some of this clearance will appear as a "relaxation" of the system. In these instances the carriage will have a slightly freer movement as it traverses between the straight and curved section than when the carriage is fully on the straight slide or curved segment. In most duties the clearance or momentary reduction in preload will not present an issue, however, in some applications it may be undesirable. In such cases customers should consider using the Hepco bogie type carriage 47, which does not develop play in the same way when traversing from straight to curved sections.

\* The FCC 25 159 has greater than normal clearance. This will be noticeable, but not detrimental in many applications.


Pinions


# **System Adjustment and Installation**



### Adjusting method for Through Fixing Eccentric bearings

To get the best performance from a HepcoMotion ring slide system, it must be correctly assembled and adjusted. To fit a carriage, the concentric bearings should be fully tightened and the eccentric bearings semi-tightened and rotated to their outermost position. The carriage may then be introduced to the slide as shown below. Both eccentric bearings should be rotated in the direction of the arrow shown opposite, until the bearings captivate the slide with minimal preload. To fit a ring slide into encircling bearings, all eccentrics should be fully adjusted away from the V edge to permit the ring to be engaged. The eccentrics may then be adjusted onto the V edge as for carriages.





The correct condition of adjustment should be assessed by rotating the bearings by holding them between forefinger and thumb whilst preventing the ring slide or carriage from moving such that the bearings skid against the slide. A uniform degree of resistance should be felt, but the bearings should be able to be rotated without difficulty. Once adjusted in this manner, the eccentric bearing fixing nuts should be fully tightened to the relevant torque value shown in the table below whilst preventing the bearing stud from further rotation, by means of the specified Hepco Adjusting Wrench. A further check should be made to ensure the correct condition of adjustment.


It should be noted that the load/life calculations assume a light preload, as is described above. Systems which are preloaded more heavily than this will suffer a reduction in the life as compared with that predicted by the calculations.


In some circumstances, it may be difficult to gain access to the hexagonal flange for system adjustment. In these situations it is possible to adjust by rotating the eccentric bearing using an allen key located in the hexagonal socket in the end of the stud and tightening the fixing nut at the same time using the Hepco socket tool, see table below. Due to the reduced control associated with this method, it is only recommended when the adjusting wrench method above is not possible.

When adjusting fixed centre carriages the lubricators should first be removed in order to gain access. When adjusting bogie carriages, the steps outlined in the adjustment procedure on 🕮 47, should be observed. In cases where an assembled system is supplied, the carriages will be supplied pre-adjusted.

# Alternative adjusting method using end socket in journal







### Ring and Track System Installation

For details on Ring and Track system installation, please visit www.HepcoMotion.com/PRT2datauk and select datasheet No. 2 Installation details.

# **Bearing Adjusting Tools and Tightening Torques**

When ordering individual components for the first time an Adjusting Wrench or Socket Tool should be ordered, these are only available from Hepco.

		Bearing Ø							
	13	13 18 25 34 54							
Adjusting Wrench	AT13	AT18	AT25	AT34	AT54				
Socket Tool		RT6	RT8	RT10	RT14				
Fixing Nut Torque	2 Nm	7 Nm	18 Nm	33 Nm	90 Nm				

### **Technical Specifications**

#### **Ring Slides and Segments**

Material and finish: **Standard version:** High carbon steel, hardened on V faces. Ground

on all main surfaces to N5 finish.

**Stainless steel version:** Special martensitic stainless steel generally conforming to 420 series, hardened on V faces. Ground on all main

surfaces to N5 finish, other faces polished.

**Track System Slides** 

Material and finish: **Standard version:** High carbon-chromium steel, hardened on V faces.

> Ground on all main surfaces to N5 finish, other faces chemically blacked. **Stainless steel version:** Special martensitic stainless steel generally conforming to 420 series, hardened on V faces. Ground on all main

surfaces to N5 finish.

**Bearings** 

Standard version: Carbon-chromium bearing steel AISI 52100 Bearing rings, balls, rollers:

hardened and tempered.

Stainless steel version: AISI 440C stainless bearing steel, hardened

Shields: Standard version only: Steel with bright zinc plated finish.

Seals: Nitrile rubber.

Plastic (metal for floating bearing). Cages:

Standard version: High tensile steel with chemical black finish. Studs:

Stainless steel version: AISI 303 series stainless steel.

Temperature range: All versions: -20°C to +120°C.

Bearings for low temperature, high temperature and vacuum use are

available on request.

**Carriage Plates** 

**All versions:** High strength aluminium alloy Material: Finish:

**Standard version:** Clear anodised.

**Stainless version:** Special finish approved by US Department of

Agriculture for food use. Stainless steel carriage plates available on request

Lubricators

Material: Impact resistant thermoplastic with felt wiper.

Fixings: Stainless steel. -20°C to +60°C. Temperature range:

Slideway oil with viscosity 68 cSt or similar. Lubricant:

**Pinions** 

Material and finish (<Mod1): **Stainless steel only version:** 300 series stainless steel, finish as

gearcut. ISO 1328 accuracy grade 10.

Material and finish (≥ Mod1) Standard version: Case hardened carburising steel. Ground on teeth

to N5 finish. ISO 1328 accuracy grade 6.

Stainless steel version: Hardened 420 series stainless steel. Ground on teeth and all main surfaces to N5 finish. ISO 1328 accuracy grade 6.

**Friction** 

Coefficient of friction for lubricated systems is typically 0.02. Lubricators will add between 0.5 (for LB12) & 2N (for LB54) each.

#### **Maximum Speed**

Generally 1m/s for dry (unlubricated) operation and 5m/s when lubricated. Greater speeds may be possible at reduced loads. Contact Hepco for details.















### **Rolled Rings, Segments & Specials**




The HepcoMotion facility for rolled rings and segments provides a means of achieving circular guidance of unlimited maximum diameter. Most slide sections in P3 grade from Hepco's highly acclaimed GV3 range can be rolled to achieve curved segments in either edge hardened or unhardened condition. Segments can be butt joined to make complete rings or to make track systems as shown below.

Please visit: **www.HepcoMotion.com/PRT2datauk** and select datasheet No. 12 Rolled Rings, Segments & Track Systems. The HepcoMotion GV3 catalogue is also available on this web site.

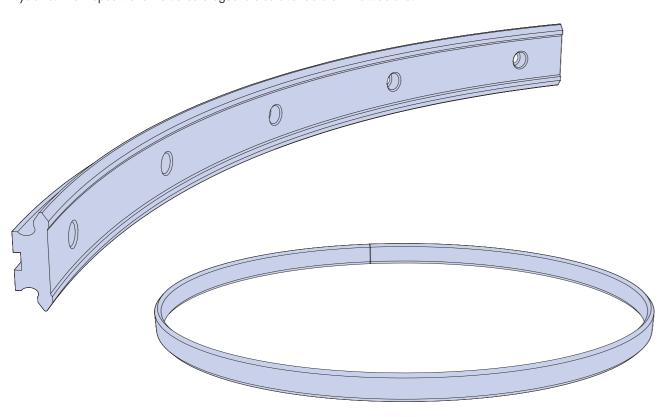


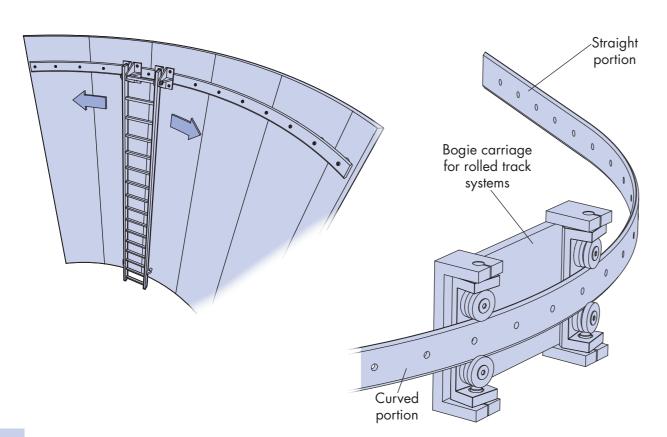

#### Rolled Rings, Segments & Specials

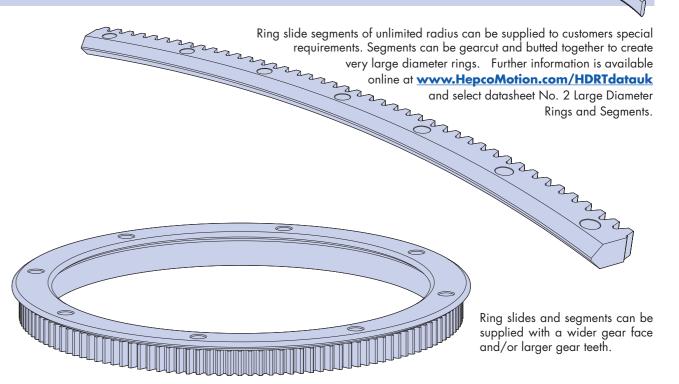

#### **Related Products**



HDRT combines the flexibility and function of the PRT2 ring track system with the size and strength of the HepcoMotion HDS2 heavy duty slide system.

HDRT has a large range of precision ground single edge V ring slides with high load capacity. There is also a track system combining double edge V ring segments and HD linear slides.

For more details and catalogue visit <a href="https://www.HepcoMotion.com/HDRTdatauk">www.HepcoMotion.com/HDRTdatauk</a>

- High load capacity up to 60kN
- 7 sizes of ring from 512 to 1656mm diameter with internal or external V
- Double edged V rings
- Track systems: limitless variety of open and closed circuits
- Stainless steel option
- Gearcut ring option with matching pinions
- Ø64, Ø95 & Ø120 bearings designed for ease of installation and setting
- Full range of fixed centre and bogie type carriages

Using the HepcoMotion PRT2 ring slides and track system as its basis, the DTS is a fully assembled unit ready to be incorporated into the customer's machine or framework.

Carriages are driven around an oval or rectangular track with continuous or intermittent (indexing) motion. The belt driven carriages are rigidly guided along the precision track thus maintaining accurate alignment and resistance to deflection.

For more details and catalogue visit www.HepcoMotion.com/DTSdatauk

- Two sizes based on the PRT2 Track System size 25 and 44
- Oval or rectangular circuit format options
- Direct load capacity up to 4000N per carriage
- Carriage locking system for accurate repeatable positioning
- Mounts directly to HepcoMotion MCS Machine Construction System
- Ingenious safety trip latch mechanism disengages drive if carriage is impeded
- AC geared motor and gearbox options available



# HepcoMotion® Product Range



# Bishop-Wisecarver Product Range

HepcoMotion® – Exclusive European partners and distributors for Bishop-Wisecarver since 1984.



For further information on HepcoMotion® products please request our leaflet 'FPL'



#### **Hepco**Motion<sup>®</sup>

Lower Moor Business Park, Tiverton Way, Tiverton, Devon, England EX16 6TG Tel: +44 (0)1884 257000 Fax: +44 (0)1884 243500 E-mail: sales@hepcomotion.com

CATALOGUE No. PRT2 04 UK © 2013 Hepco Slide Systems Ltd.

Reproduction in whole or part without prior authorisation from Hepco is prohibited. Although every effort has been made to ensure the accuracy of the information in this catalogue, Hepco cannot accept liability for any omissions or errors. Hepco reserves the right to make alterations to the product resulting from technical developments. Many Hepco products are protected by: Patents, Copyright, Design Right or Registered Design. Infringement is strictly prohibited and may be challenged in law. The Customer's attention is drawn to the following clause in Hepco's conditions of sale:

the shall be the Customer's sole responsibility to ensure that goods supplied by Hepco will be suitable or fit for any particular application or purpose of the Customer, whether or not such application or purpose is known to Hepco. The Customer will be solely responsible for any errors in, or omissions from, any specifications or information the Customer provides. Hepco will not be obliged to verify whether any such specifications or information are correct or sufficient for any application or purpose.'

Hepco's full conditions of sale are available on request and will apply to all quotations and contracts for the supply of items detailed in this catalogue.

HepcoMotion is the trading name of Hepco Slide Systems Ltd.