

ST5-C-CN

DC CANopen Advanced Microstep Drive

1pc. - 541.00
50pc. - 405.75



Product Features

- Advanced current control microstepping drive with built-in CANopen networking
- CANopen DS301 and DSP402 supported
- Profile position and velocity modes
- Several homing modes
- Objects for Q programming
- Objects for data registers
- Wide current range 0.1 to 5.0 A/phase (peak of sine) with idle current reduction
- Advanced anti-resonance algorithm
- Torque ripple smoothing
- Microstepping and Microstep Emulation
- 8 digital inputs, 4 digital outputs, optically isolated
- 2 analog inputs, +/- 10 volt range
- RS-232 cable and mating connectors included



Description

The ST5-C-CN stepper drive is a DC-powered microstepping drive for controlling two-phase, bipolar step motors. It offers advanced current control and a sophisticated 3rd generation anti-resonance algorithm that electronically dampens motor and system resonances to improve motor smoothness and usable torque over a wide speed range. The drive also employs electronic torque ripple smoothing and microstep emulation to greatly reduce motor noise and vibration. The drive must be powered from 24-48 VDC and can output up to 5.0 A/phase (peak-of-sine) to the step motor. Over-voltage, over-temperature and over-current protection features prevent damage while running in adverse conditions. The drive is complemented by a specifically matched set of NEMA 11 through NEMA 23 frame stepper motors (see Related and Recommended products below).

The ST5-C-CN is designed to operate on a CANopen communication network and conforms to Can in Automation (CiA) DS301 and DSP402 specifications. It supports Profile Position, Profile Velocity, and Homing modes, as well as the ability to run stored Q programs via Applied Motion-specific CANopen objects. The drive is setup and configured using Applied Motion's [ST Configurator™](#) software. Preconfigured motor setup files included with *ST Configurator™* make it easy to set up the drive for optimum results.

For connecting to external devices such as control signals, incremental encoders, limit switches, proximity or photoelectric sensors, PLC I/O, lamps, and other devices, the drive comes with 8 digital inputs, 4 digital outputs, and 2 single-ended analog inputs (analog inputs can be wired together as 1 differential analog input). Adjustable digital filters are present on the digital inputs for enhanced reliability in noisy environments.

The drive comes with an RS-232 port for configuration and programming. It also comes with a CANopen port for connecting to the CANopen data network.

All ST drives are CE approved and RoHS compliant.


Specifications

Model Number:	ST5-C-CN
Part Number:	5000-136
Supply Voltage:	24-48 VDC
Supply Voltage Type:	DC
Control Modes:	CANopen
Output Current:	0.1-5.0 A/phase
Communication Ports:	RS-232 CANopen
Encoder Feedback:	No
Step Resolution:	Full Half Microstepping Microstep Emulation
Idle Current Reduction:	0-90%
Setup Method:	Software setup
Digital Inputs:	8
Digital Outputs:	4
Analog Inputs:	1 differential or 2 single-ended
Dimensions:	5.0 x 3.0 x 1.75 inches
Weight:	10.4 oz
Operating Temperature Range:	0-70 °C
Ambient Temperature Range:	0-55 °C
Ambient Humidity:	90% max, non-condensing
Status LEDs:	1 red, 1 green
Circuit Protection:	Short circuit Over-voltage Under-voltage Over-temp

Torque Curves


HT11-012, HT11-013, 5014-842

24 VDC power supply, 20000 steps/rev

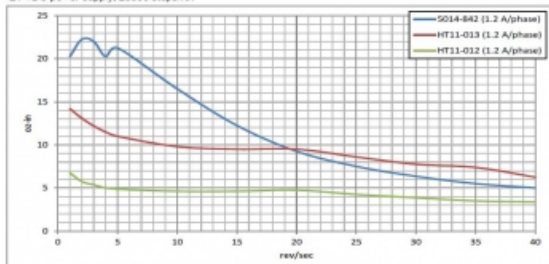


HT17

24 VDC power supply, 20000 steps/rev, all motors connected in parallel

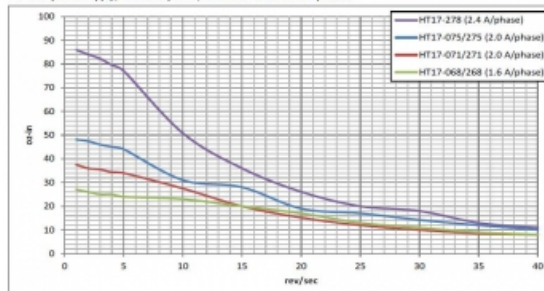


HT17

48 VDC power supply, 20000 steps/rev, all motors connected in parallel

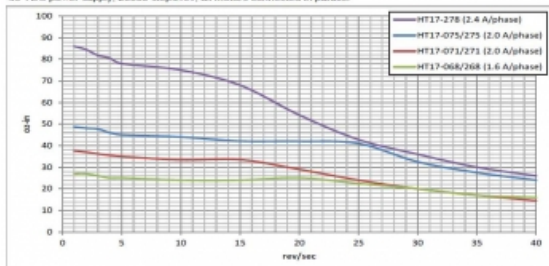


HT23

24 VDC power supply, 20000 steps/rev, all motors connected in parallel

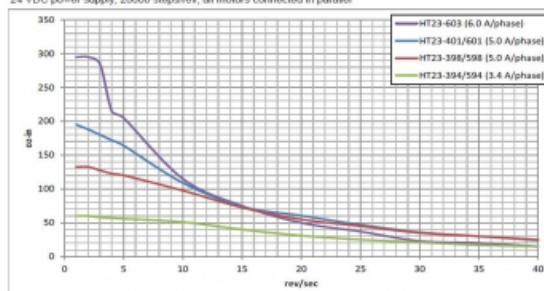


HT23

48 VDC power supply, 20000 steps/rev, all motors connected in parallel

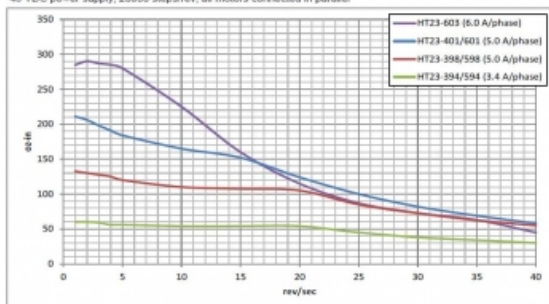


HT24

24 VDC power supply, 20000 steps/rev

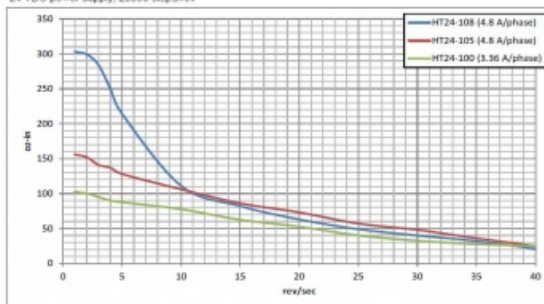

HT24

48 VDC power supply, 20000 steps/rev

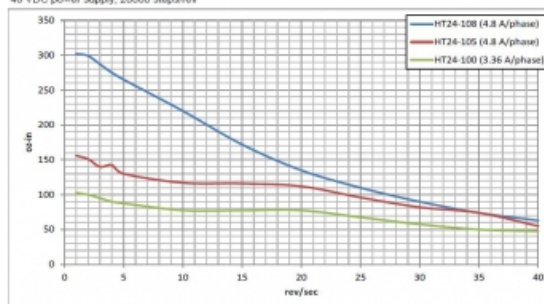














Software

Software: [ST Configurator™](#)


Sample Code: [CANopen_Example.zip](#)

Downloads

Manuals:	 ST5-10C_QuickSetup_920-0042C.pdf  ST5-10-QSi_Hardware Manual_920-0004F.pdf  CANopen_Manual_920-0025K.pdf
Datasheet:	http://s3.amazonaws.com/applied-motion-pdf/ST5-C-CN.pdf
Family Datasheet:	 ST_Datasheet_925-0007.pdf  CANopen_FAQ2.pdf  ST-CANopen-EDS.eds
2D Drawing:	 ST5_10_Dimensions.pdf  ST_T_simple_3D.pdf
3D Drawing:	 ST5_10-Q_Si_C_SIMPLE.igs
Speed-Torque Curves:	 ST_speed-torque.pdf
Agency Approvals:	 ST-Q-Si-C-IP_CE_DOC.pdf
Application Notes:	 APPN0016_Simple-25-pin-mating-connections.pdf  APPN0015_Make-a-serial-programming-cable.pdf

Pricing

ST5-C-CN Part No. 5000-136	
1pc.	\$541.00
25pc.	\$465.26
50pc.	\$405.75
100pc.	Contact us for 100+ piece pricing.

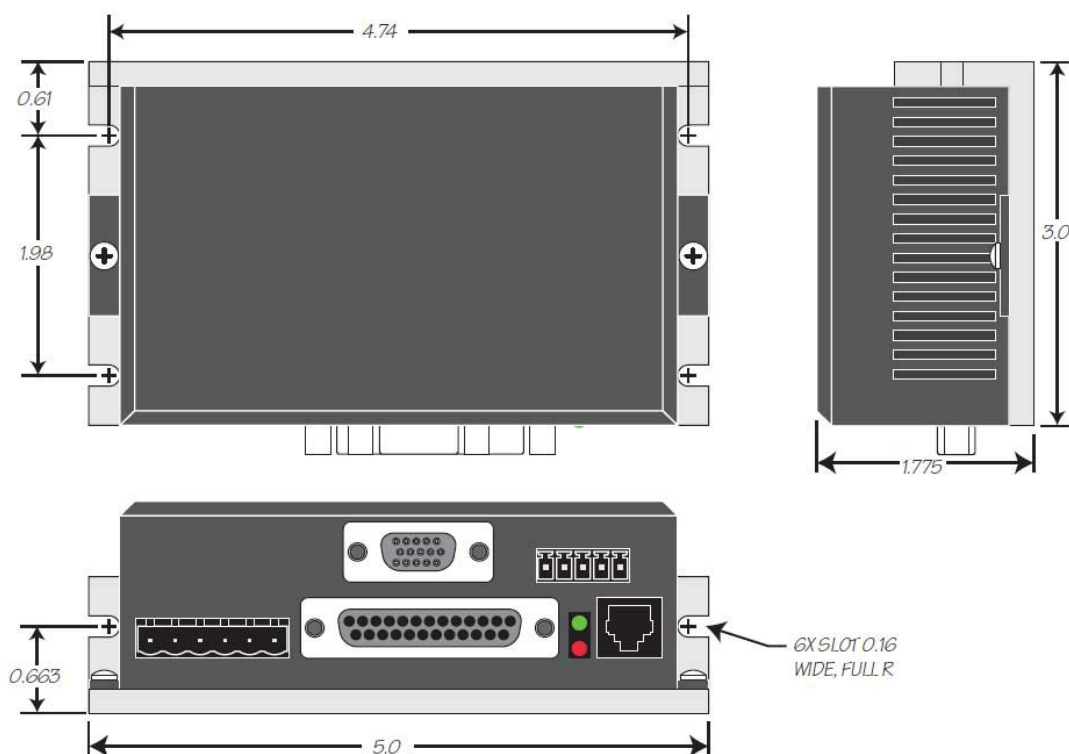Mechanical Outline**Products in the Series *CANopen Products***

Model Number	Supply Voltage	Control Modes	Output Current	Communication Ports	Encoder Feedback	1pc./50pc.
	12-70 VDC	CANopen	NA	RS-232, CANopen	Yes	\$674.00 / \$505.50
	12-70 VDC	CANopen	NA	RS-232, CANopen	No	\$588.00 / \$441.00
	12-70 VDC	CANopen	NA	RS-232, CANopen	Yes	\$710.00 / \$532.50
	12-70 VDC	CANopen	NA	RS-232, CANopen	No	\$588.00 / \$441.00
	12-48 VDC	CANopen	NA	RS-232, CANopen	Yes	\$513.00 / \$384.75
	12-48 VDC	CANopen	NA	RS-232, CANopen	No	\$408.00 / \$306.00
ST10-C-CE	24-80 VDC	CANopen	0.1-10.0 A/Phase	RS-232, CANopen	Yes	\$682.00 / \$511.50
ST10-C-CN	24-80 VDC	CANopen	0.1-10.0 A/Phase	RS-232, CANopen	No	\$631.00 / \$473.25
ST5-C-CE	24-48 VDC	CANopen	0.1-5.0 A/Phase	RS-232, CANopen	Yes	\$585.00 / \$438.75
ST5-C-CN	24-48 VDC	CANopen	0.1-5.0 A/Phase	RS-232, CANopen	No	\$541.00 / \$405.75
STAC6-C	94-135 VAC	CANopen	0.5-6.0 A/Phase	RS-232, CANopen	Yes	\$1107.00 / \$830.25
STAC6-C-220	94-265 VAC	CANopen	0.5-3.2 A/Phase	RS-232, CANopen	Yes	\$1212.00 / \$909.00
SV7-C-CE	24-80 VDC	CANopen	NA	RS-232, CANopen	NA	\$585.00 / \$438.75

Products in the Series *ST Stepper Drives*

Model Number	Supply Voltage	Control Modes	Output Current	Communication Ports	Encoder Feedback	1pc./50pc.
ST10-C-CE	24-80 VDC	CANopen	0.1-10.0 A/Phase	RS-232, CANopen	Yes	\$682.00 / \$511.50
ST10-C-CN	24-80 VDC	CANopen	0.1-10.0 A/Phase	RS-232, CANopen	No	\$631.00 / \$473.25
ST10-IP-EE	24-80 VDC	Streaming Commands, Analog Positioning, Encoder Following, Q Programming, EtherNet/IP	0.1-10.0 A/Phase	Ethernet, EtherNet/IP	Yes	\$710.00 / \$532.50
ST10-IP-EN	24-80 VDC	Streaming Commands, Analog Positioning, Encoder Following, Q Programming, EtherNet/IP	0.1-10.0 A/Phase	Ethernet, EtherNet/IP	No	\$659.00 / \$494.25
ST10-Plus	24-80 VDC	Streaming Commands, Analog Positioning, Encoder Following, Q Programming	0.1-10.0 A/Phase	RS-232	No	\$440.00 / \$330.00
ST10-Q-EE	24-80 VDC	Step & Direction, Velocity (Oscillator), Streaming Commands, Analog Positioning, Encoder Following, Q Programming	0.1-10.0 A/Phase	Ethernet	Yes	\$726.00 / \$544.50
ST10-Q-EN	24-80 VDC	Step & Direction, Velocity (Oscillator), Streaming Commands, Analog Positioning, Encoder Following, Q Programming	0.1-10.0 A/Phase	Ethernet	No	\$660.00 / \$495.00
ST10-Q-NE	24-80 VDC	Step & Direction, Velocity (Oscillator), Streaming Commands, Analog Positioning, Encoder Following, Q Programming, SiNet Hub Compatible, Modbus	0.1-10.0 A/Phase	RS-232	Yes	\$580.00 / \$435.00
ST10-Q-NF	24-80 VDC	Step & Direction, Streaming Commands, Analog Positioning, Encoder Following, Q Programming, SiNet Hub Compatible, Velocity Control	0.1-10.0 A/Phase	RS-232	Yes	\$557.00 / \$417.75
ST10-Q-NN	24-80 VDC	Step & Direction, Velocity (Oscillator), Streaming Commands, Analog Positioning, Encoder Following, Q Programming, SiNet Hub Compatible, Modbus	0.1-10.0 A/Phase	RS-232	No	\$515.00 / \$386.25
ST10-Q-RE	24-80 VDC	Step & Direction, Velocity (Oscillator), Streaming Commands, Analog Positioning, Encoder Following, Q Programming, Modbus	0.1-10.0 A/Phase	RS-232, RS-485	Yes	\$690.00 / \$517.50
ST10-Q-RN	24-80 VDC	Step & Direction, Velocity (Oscillator), Streaming Commands, Analog Positioning, Encoder Following, Q Programming, Modbus	0.1-10.0 A/Phase	RS-232, RS-485	No	\$630.00 / \$472.50
ST10-S	24-80 VDC	Step & Direction, Velocity (Oscillator), Streaming Commands, SiNet Hub Compatible	0.1-10.0 A/Phase	RS-232	No	\$405.00 / \$303.75
ST10-Si-NE	24-80 VDC	Si Programming	0.1-10.0 A/Phase	RS-232	Yes	\$630.00 / \$472.50
ST10-Si-NF	24-80 VDC	Step & Direction, Streaming Commands, Analog Positioning, Encoder Following, Si Programming, Q Programming, SiNet Hub Compatible, Velocity Control	0.1-10.0 A/Phase	RS-232	Yes	\$636.00 / \$477.00
ST10-Si-NN	24-80 VDC	Si Programming	0.1-10.0 A/Phase	RS-232	No	\$580.00 / \$435.00
ST5-C-CE	24-48 VDC	CANopen	0.1-5.0 A/Phase	RS-232, CANopen	Yes	\$585.00 / \$438.75
ST5-C-CN	24-48 VDC	CANopen	0.1-5.0 A/Phase	RS-232, CANopen	No	\$541.00 / \$405.75
ST5-IP-EE	24-48 VDC	Streaming Commands, Analog Positioning, Encoder Following, Q Programming, EtherNet/IP	0.1-5.0 A/Phase	Ethernet, EtherNet/IP	Yes	\$655.00 / \$491.25
ST5-IP-EN	24-48 VDC	Streaming Commands, Analog Positioning, Encoder Following, Q Programming, EtherNet/IP	0.1-5.0 A/Phase	Ethernet, EtherNet/IP	No	\$607.00 / \$455.25
ST5-Plus	24-48 VDC	Streaming Commands, Analog Positioning, Encoder Following, Q Programming	0.1-5.0 A/Phase	RS-232	No	\$346.00 / \$259.50
ST5-Q-EE	24-48 VDC	Step & Direction, Velocity (Oscillator), Streaming Commands, Analog Positioning, Encoder Following, Q Programming	0.1-5.0 A/Phase	Ethernet	Yes	\$614.00 / \$460.50
ST5-Q-EN	24-48 VDC	Step & Direction, Velocity (Oscillator), Streaming Commands, Analog Positioning, Encoder Following, Q Programming	0.1-5.0 A/Phase	Ethernet	No	\$564.00 / \$423.00
ST5-Q-NE	24-48 VDC	Step & Direction, Velocity (Oscillator), Streaming Commands, Analog Positioning, Encoder Following, Q Programming, SiNet Hub Compatible, Modbus	0.1-5.0 A/Phase	RS-232	Yes	\$540.00 / \$405.00
ST5-Q-NF	24-48 VDC	Step & Direction, Streaming Commands, Analog Positioning, Encoder Following, Q Programming, SiNet Hub Compatible, Velocity Control	0.1-5.0 A/Phase	RS-232	Yes	\$530.00 / \$397.50
ST5-Q-NN	24-48 VDC	Step & Direction, Velocity (Oscillator), Streaming Commands, Analog Positioning, Encoder Following, Q Programming, SiNet Hub Compatible, Modbus	0.1-5.0 A/Phase	RS-232	No	\$467.00 / \$350.25

ST5-Q-RE	24-48 VDC	Step & Direction, Velocity (Oscillator), Streaming Commands, Analog Positioning, Encoder Following, Q Programming, Modbus	0.1-5.0 A/Phase	RS-232, RS-485	Yes	\$625.00 / \$468.75
ST5-Q-RN	24-48 VDC	Step & Direction, Velocity (Oscillator), Streaming Commands, Analog Positioning, Encoder Following, Q Programming, Modbus	0.1-5.0 A/Phase	RS-232, RS-485	No	\$570.00 / \$427.50
ST5-S	24-48 VDC	Step & Direction, Velocity (Oscillator), Streaming Commands, SiNet Hub Compatible	0.1-5.0 A/Phase	RS-232	No	\$302.00 / \$226.50
ST5-Si-NE	24-48 VDC	Si Programming	0.1-5.0 A/Phase	RS-232	Yes	\$579.00 / \$434.25
ST5-Si-NF	24-48 VDC	Step & Direction, Streaming Commands, Analog Positioning, Encoder Following, Si Programming, Q Programming, SiNet Hub Compatible, Velocity Control	0.1-5.0 A/Phase	RS-232	Yes	\$606.00 / \$454.50
ST5-Si-NN	24-48 VDC	Si Programming	0.1-5.0 A/Phase	RS-232	No	\$490.00 / \$367.50