1pc. - 564.00 50pc. - 423.00

ST5-Q-EN

DC Advanced Microstep Drive w/ Ethernet & Q Programming





Product Features

- Programmable microstepping drive with advanced current control
- Q Programmer™ for robust motion control programming
- 744 lines of stored program capability
- Math calculations using analog and digital parameters
- Supports all "S" drive control modes as well
- Compatible with many 3rd party HMIs
- Wide current range 0.1 to 5.0 A/phase (peak of sine) with idle current reduction
- Advanced anti-resonance algorithm
- Torque ripple smoothing
- Microstepping and Microstep Emulation
- 8 digital inputs, 4 digital outputs, optically isolated
- 2 analog inputs, +/-10 volt range
- Fast 10/100 Ethernet for programming and communications
- UDP & TCP support



Description

The ST5-Q-EN stepper drive is a DC-powered microstepping drive for controlling two-phase, bipolar step motors. It offers advanced current control and a sophisticated 3rd generation anti-resonance algorithm that electronically dampens motor and system resonances to improve motor smoothness and usable torque over a wide speed range. The drive also employs electronic torque ripple smoothing and microstep emulation to greatly reduce motor noise and vibration. The drive must be powered from 24-48 VDC and can output up to 5.0 A/phase (peak-of-sine) to the step motor. Overvoltage, over-temperature and over-current protection features prevent damage while running in adverse conditions. The drive is complemented by a specifically matched set of NEMA 11 through NEMA 23 frame stepper motors (see Related and Recommended products below).

The ST5-Q-EN can operate in pulse & direction, velocity, and streaming command modes, plus it has the ability to run stand-alone Q programs stored in non-volatile memory. Q programs are created using the Q Programmer software, which provides multi-tasking, math functions, conditional processing, data register manipulation, and more features in a robust yet simple text-based programming language. The drive is setup and configured using Applied Motion's ST Configurator software. Preconfigured motor setup files included with ST Configurator make it easy to set up the drive for optimum results.

For connecting to external devices such as control signals, incremental encoders, limit switches, proximity or photoelectric sensors, PLC I/O, lamps, and other devices, the drive comes with 8 digital inputs, 4 digital outputs, and 2 single-ended analog inputs (analog inputs can be wired together as 1 differential analog input). Adjustable digital filters are present on the digital inputs for enhanced reliability in noisy environments.


The drive comes with an Ethernet port for configuration and programming. The Ethernet port is fast 10/100 Mbit, and the drive supports both TCP and UPD communication protocols.


All ST drives are CE approved and RoHS compliant.


Specifications


Model Number:	ST5-Q-EN
Part Number:	5000-177
Supply Voltage:	24-48 VDC
Supply Voltage Type:	DC
Control Modes:	Step & Direction Velocity (Oscillator) Streaming Commands Analog Positioning Encoder Following Q Programming
Output Current:	0.1-5.0 A/phase
Communication Ports:	Ethernet
Encoder Feedback:	No
Step Resolution:	Full
	Half Microstepping Microstep Emulation
Idle Current Reduction:	0-90%
Setup Method:	Software setup
Digital Inputs:	8
Digital Outputs:	4
Analog Inputs:	1 differential or 2 single-ended
Dimensions:	5.0 x 3.0 x 1.75 inches
Weight:	10.4 oz
Operating Temperature Range:	0-70 °C
Ambient Temperature Range:	0-55 °C
Ambient Humidity:	90% max, non-condensing
Status LEDs:	1 red, 1 green
Circuit Protection:	Short circuit Over-voltage Under-voltage Over-temp


Torque Curves

















Software

Software: SCL Utility

ST Configurator™

Sample Code:

C_sharp_UDP_example.zip

WB6_UDP_example.zip

WB6_TCP_example.zip


Downloads

Manuals:	Manuals: d ST5_10-Q_QuickSetup_920-0007E.pdf d Host Command Reference Rev I.pdf d eSCL_Comm_Reference.pdf d ST5-10-QSi_Hardware Manual_920-0004F.pdf		
Datasheet:	http://s3.amazonaws.com/applied-motion-pdf/ST5-Q-EN.pdf		
Family Datasheet:	atasheet: ST_Datasheet_925-0007.pdf		
2D Drawing:	 ☑ ST5_10 Dimensions.pdf☑ ST_T_simple_3D.pdf		
3D Drawing:	ST5_10-Q_Si_C_SIMPLE.igs		
Speed-Torque Curves:	<u>ST_speed-torque.pdf</u>		
Agency Approvals:	ST-Q-Si-C-IP_CE_DOC.pdf		
Application Notes:	APPN0021_5V-Keepalive-Circuit.pdf APPN0020-Maple-Systems-with-Ethernet-Drive.zip APPN0019_Analog-positioning-using-Q-program.zip APPN0016_Simple-25-pin-mating-connections.pdf		

Pricing

	ST5-Q-EN Part No. 5000-177
1pc.	\$564.00
25рс.	\$485.04
50pc.	\$423.00
100рс.	Contact us for 100+ piece pricing.

Mechanical Outline

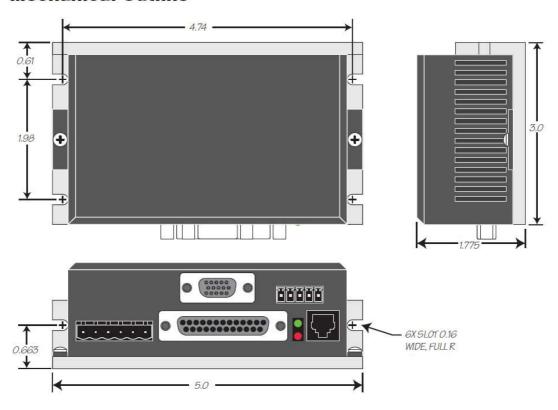

Products in the Series *ST Stepper Drives*

Model Number	Supply Voltage	Control Modes	Output Current	Communication Ports	Encoder Feedback	1pc./50pc. 💠
ST10-C-CE	24-80 VDC	CANopen	0.1-10.0 A/Phase	RS-232, CANopen	Yes	\$682.00 / \$511.50
ST10-C-CN	24-80 VDC	CANopen	0.1-10.0 A/Phase	RS-232, CANopen	No	\$631.00 / \$473.25
ST10-IP-EE	24-80 VDC	Streaming Commands, Analog Positioning, Encoder Following, Q Programming, EtherNet/IP	0.1-10.0 A/Phase	Ethernet, EtherNet/IP	Yes	\$710.00 / \$532.50
ST10-IP-EN	24-80 VDC	Streaming Commands, Analog Positioning, Encoder Following, Q Programming, EtherNet/IP	0.1-10.0 A/Phase	Ethernet, EtherNet/IP	No	\$659.00 / \$494.25
ST10-Plus	24-80 VDC	Streaming Commands, Analog Positioning, Encoder Following, Q Programming	0.1-10.0 A/Phase	RS-232	No	\$440.00 / \$330.00
ST10-Q-EE	24-80 VDC	Step & Direction, Velocity (Oscillator), Streaming Commands, Analog Positioning, Encoder Following, Q Programming	0.1-10.0 A/Phase	Ethernet	Yes	\$726.00 / \$544.50
ST10-Q-EN	24-80 VDC	Step & Direction, Velocity (Oscillator), Streaming Commands, Analog Positioning, Encoder Following, Q Programming	0.1-10.0 A/Phase	Ethernet	No	\$660.00 / \$495.00
ST10-Q-NE	24-80 VDC	Step & Direction, Velocity (Oscillator), Streaming Commands, Analog Positioning, Encoder Following, Q Programming, SiNet Hub Compatible, Modbus	0.1-10.0 A/Phase	RS-232	Yes	\$580.00 / \$435.00
ST10-Q-NF	24-80 VDC	Step & Direction, Streaming Commands, Analog Positioning, Encoder Following, Q Programming, SiNet Hub Compatible, Velocity Control	0.1-10.0 A/Phase	RS-232	Yes	\$557.00 / \$417.75
ST10-Q-NN	24-80 VDC	Step & Direction, Velocity (Oscillator), Streaming Commands, Analog Positioning, Encoder Following, Q Programming, SiNet Hub Compatible, Modbus	0.1-10.0 A/Phase	RS-232	No	\$515.00 / \$386.25
ST10-Q-RE	24-80 VDC	Step & Direction, Velocity (Oscillator), Streaming Commands, Analog Positioning, Encoder Following, Q Programming, Modbus	0.1-10.0 A/Phase	RS-232, RS-485	Yes	\$690.00 / \$517.50
ST10-Q-RN	24-80 VDC	Step & Direction, Velocity (Oscillator), Streaming Commands, Analog Positioning, Encoder Following, Q Programming, Modbus	0.1-10.0 A/Phase	RS-232, RS-485	No	\$630.00 / \$472.50
<u>ST10-S</u>	24-80 VDC	Step & Direction, Velocity (Oscillator), Streaming Commands, SiNet Hub Compatible	0.1-10.0 A/Phase	RS-232	No	\$405.00 / \$303.75
ST10-Si-NE	24-80 VDC	Si Programming	0.1-10.0 A/Phase	RS-232	Yes	\$630.00 / \$472.50
ST10-Si-NF	24-80 VDC	Step & Direction, Streaming Commands, Analog Positioning, Encoder Following, Si Programming, Q Programming, SiNet Hub Compatible, Velocity Control	0.1-10.0 A/Phase	RS-232	Yes	\$636.00 / \$477.00
ST10-Si-NN	24-80 VDC	Si Programming	0.1-10.0 A/Phase	RS-232	No	\$580.00 / \$435.00
ST5-C-CE	24-48 VDC	CANopen	0.1-5.0 A/Phase	RS-232, CANopen	Yes	\$585.00 / \$438.75
ST5-C-CN	24-48 VDC	CANopen	0.1-5.0 A/Phase	RS-232, CANopen	No	\$541.00 / \$405.75
ST5-IP-EE	24-48 VDC	Streaming Commands, Analog Positioning, Encoder Following, Q Programming, EtherNet/IP	0.1-5.0 A/Phase	Ethernet, EtherNet/IP	Yes	\$655.00 / \$491.25
ST5-IP-EN	24-48 VDC	Streaming Commands, Analog Positioning, Encoder Following, Q Programming, EtherNet/IP	0.1-5.0 A/Phase	Ethernet, EtherNet/IP	No	\$607.00 / \$455.25
ST5-Plus	24-48 VDC	Streaming Commands, Analog Positioning, Encoder Following, Q Programming	0.1-5.0 A/Phase	RS-232	No	\$346.00 / \$259.50
ST5-Q-EE	24-48 VDC	Step & Direction, Velocity (Oscillator), Streaming Commands, Analog Positioning, Encoder Following, Q Programming	0.1-5.0 A/Phase	Ethernet	Yes	\$614.00 / \$460.50
ST5-Q-EN	24-48 VDC	Step & Direction, Velocity (Oscillator), Streaming Commands, Analog Positioning, Encoder Following, Q Programming	0.1-5.0 A/Phase	Ethernet	No	\$564.00 / \$423.00
		Step & Direction, Velocity (Oscillator),				

ST5-Q-NE	24-48 VDC	Streaming Commands, Analog Positioning, Encoder Following, Q Programming, SiNet Hub Compatible, Modbus	0.1-5.0 A/Phase	RS-232	Yes	\$540.00 / \$405.00
ST5-Q-NF	24-48 VDC	Step & Direction, Streaming Commands, Analog Positioning, Encoder Following, Q Programming, SiNet Hub Compatible, Velocity Control	0.1-5.0 A/Phase	RS-232	Yes	\$530.00 / \$397.50
ST5-Q-NN	24-48 VDC	Step & Direction, Velocity (Oscillator), Streaming Commands, Analog Positioning, Encoder Following, Q Programming, SiNet Hub Compatible, Modbus	0.1-5.0 A/Phase	RS-232	No	\$467.00 / \$350.25
ST5-Q-RE	24-48 VDC	Step & Direction, Velocity (Oscillator), Streaming Commands, Analog Positioning, Encoder Following, Q Programming, Modbus	0.1-5.0 A/Phase	RS-232, RS-485	Yes	\$625.00 / \$468.75
ST5-Q-RN	24-48 VDC	Step & Direction, Velocity (Oscillator), Streaming Commands, Analog Positioning, Encoder Following, Q Programming, Modbus	0.1-5.0 A/Phase	RS-232, RS-485	No	\$570.00 / \$427.50
<u>ST5-S</u>	24-48 VDC	Step & Direction, Velocity (Oscillator), Streaming Commands, SiNet Hub Compatible	0.1-5.0 A/Phase	RS-232	No	\$302.00 / \$226.50
ST5-Si-NE	24-48 VDC	Si Programming	0.1-5.0 A/Phase	RS-232	Yes	\$579.00 / \$434.25
ST5-Si-NF	24-48 VDC	Step & Direction, Streaming Commands, Analog Positioning, Encoder Following, Si Programming, Q Programming, SiNet Hub Compatible, Velocity Control	0.1-5.0 A/Phase	RS-232	Yes	\$606.00 / \$454.50
ST5-Si-NN	24-48 VDC	Si Programming	0.1-5.0 A/Phase	RS-232	No	\$490.00 / \$367.50