

4



3

2

1

REVISIONS				
ECO #	REV.	DESCRIPTION	DATE	APPROVED
7135	A	INITIAL RELEASE	1/20/2015	J. KORDIK
8698	B	POWER CONNECTOR PART CHANGE, SPECS ADDED	8/9/2021	M. MARONEY

B

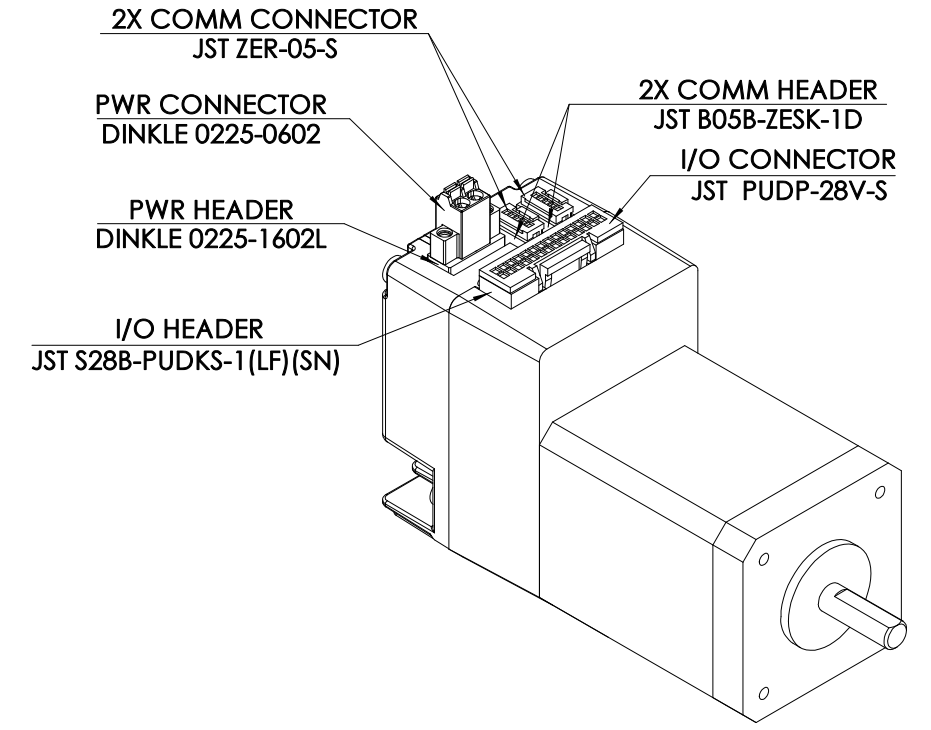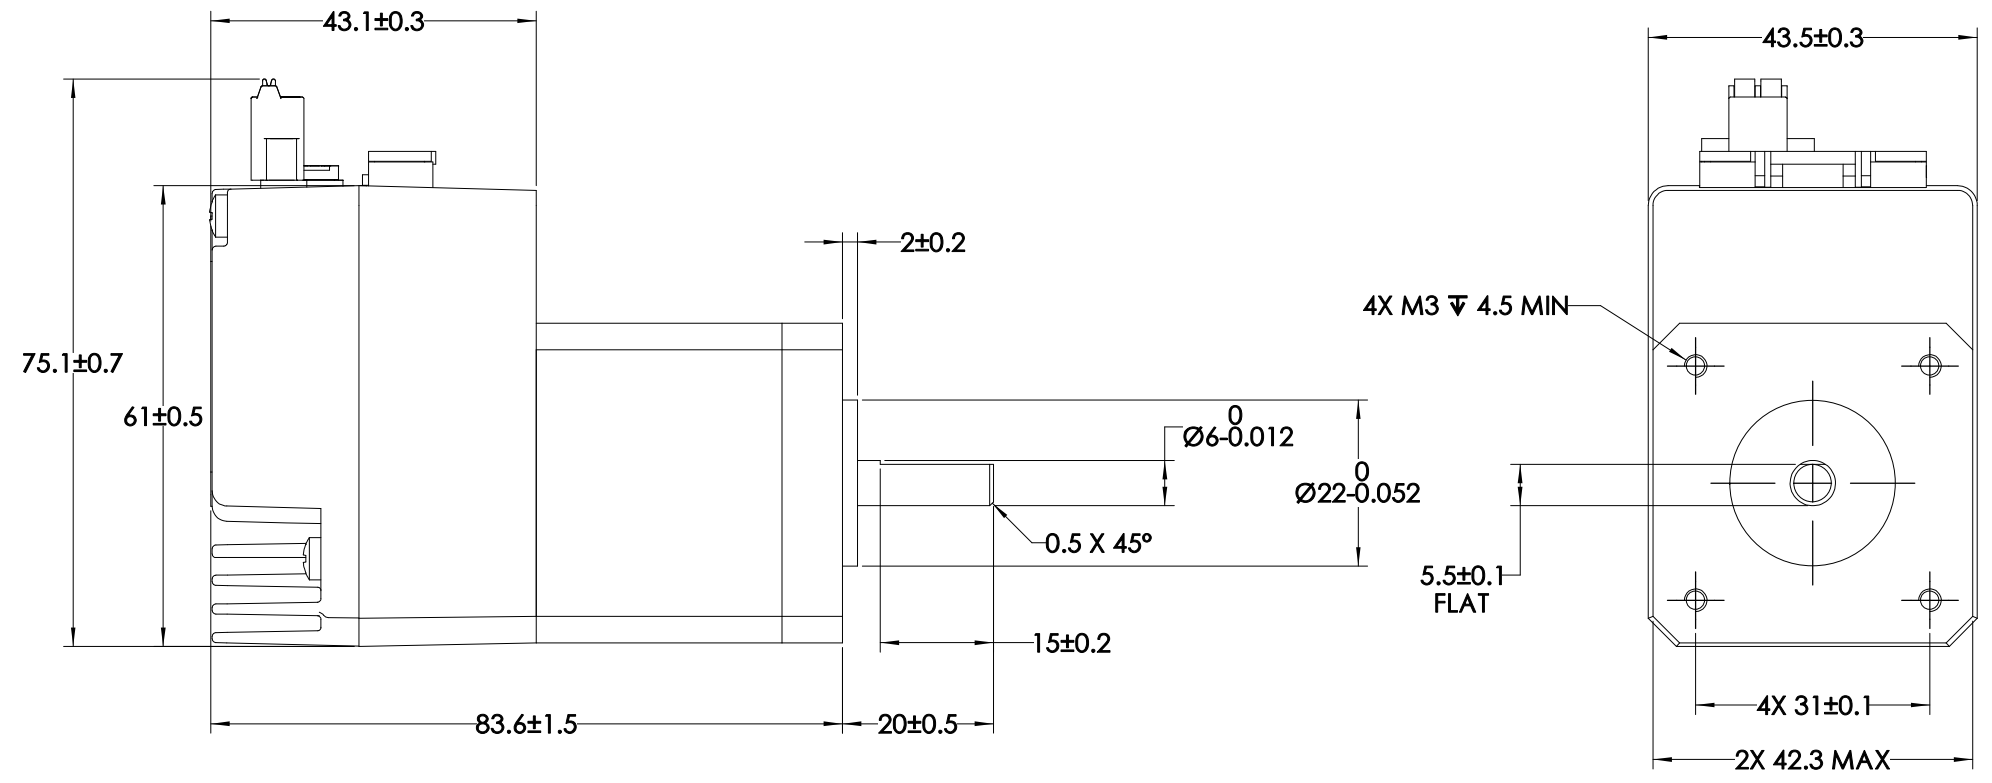

B

A

SPECIFICATIONS			
INPUT VOLTAGE	12 TO 48 VDC	HOLDING TORQUE	0.6N·m
STEP ANGLE	1.8°	MAX AXIAL LOAD	5.1N [2]
STEP ACCURACY	±0.09°	MAX RADIAL LOAD	20N [2]
OPERATING TEMP	0 TO 40°C	RADIAL PLAY	0.02mm MAX (500gf RADIAL LOAD)
STORAGE TEMP	-20 TO 50°C	END PLAY	0.08mm MAX (500gf AXIAL LOAD)
TEMP RISE	80°C MAX	SHAFT RUNOUT	0.05mm T.I.R. MAX
ROTOR INERTIA	82g·cm ²	WEIGHT	520g
IP RATING	IP20	APPROVALS	CE, RoHS

- NOTES:
- REFER TO PRODUCT HARDWARE MANUAL ON APPLIED-MOTION.COM FOR MORE DETAILS.
 - SHAFT LOADS FOR L₁₀ LIFE OF 20,000 HOURS AT 1000 RPM. RADIAL LOAD AT END OF SHAFT.

A

<p>Applied Motion Products A MOONS' COMPANY</p> <p>PROPRIETARY AND CONFIDENTIAL</p> <p>THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF APPLIED MOTION PRODUCTS. ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF APPLIED MOTION PRODUCTS IS PROHIBITED.</p>	THIRD ANGLE PROJECTION	NAME	DATE	TITLE: INTEGRATED StepSERVO MOTOR	
	UNLESS OTHERWISE SPECIFIED: DIMENSIONS ARE IN MILLIMETERS	DRAWN	Tang Jiadong		Jul 19, 2021
	TOLERANCES:	PRE.CHECK	Guo Wenxiang		Jul 19, 2021
	- ANGULAR: ± 0.5	PRE.APPROVAL	Wang Wei		Jul 19, 2021
	- ONE DECIMAL PLACE: ± 0.25	FIN.CHECK	Y. Lapnet		Aug 09, 2021
- TWO DECIMAL PLACES: ± 0.13	COMMENTS:				
MATERIAL				SIZE	
FINISH				DWG. NO.	
DO NOT SCALE DRAWING				REV	

4

3

2

1

SIZE	DWG. NO.	REV
B	TSM17Q-3RG	B
SCALE: 1:1		SHEET 1 OF 1